FERC/FEIS-0045
SCH 85081912

BLM LIBRARY
88074556

MOJAVE-KERN RIVER-EL DORADO Natural Gas Pipeline Projects

Final Environmental Impact Report/Statement

VOLUME III

Comparisons and Recommendations

CALIFORNIA STATE LANDS COMMISSION
FEDERAL ENERGY REGULATORY COMMISSION

TD
194.5
.M64
1987
v.3

December 1987

CCI

MOJAVE-KERN RIVER-EL DORADO

Natural Gas Pipeline Projects

Final Environmental Impact Report/Statement

December 1987

VOLUME III

Comparisons and Recommendations

CALIFORNIA STATE LANDS COMMISSION
1807 13th Street
Sacramento, California 95814

and

FEDERAL ENERGY REGULATORY COMMISSION
825 North Capitol Street
Washington, D.C. 20426

CHAMBERS GROUP, INC.

MOJAVE-KERN RIVER-EL DORADO NATURAL GAS PIPELINE PROJECTS FINAL EIR/EIS

MASTER TABLE OF CONTENTS

VOLUME I - Mojave, El Dorado, El Paso, and Transwestern

SUMMARY
CHAPTER 1 INTRODUCTION
CHAPTER 2 DESCRIPTION OF PROPOSED PROJECTS
CHAPTER 3 AFFECTED ENVIRONMENT
CHAPTER 4 ENVIRONMENTAL CONSEQUENCES
CHAPTER 5 CEQA ALTERNATIVES

VOLUME II - Kern River

CHAPTER 1 INTRODUCTION
CHAPTER 2 DESCRIPTION OF PROPOSED PROJECTS
CHAPTER 3 AFFECTED ENVIRONMENT
CHAPTER 4 ENVIRONMENTAL CONSEQUENCES
CHAPTER 5 CEQA ALTERNATIVES
REFERENCES
GLOSSARY

VOLUME I APPENDICES
Appendix A Characteristics of the Soil Mapping Units
Appendix B Vegetation Community Types
Appendix C Plant Species of Special Concern
Appendix D A Summary of Grazing Allotments
Appendix E-1 Common and Scientific Names for Plant Species
Appendix E-2 Common and Scientific Names for Wildlife Species

VOLUME II APPENDICES
Appendix A Characteristics of the Soil Mapping Units
Appendix B Vegetation Community Types
Appendix C Plant Species of Special Concern
Appendix D A Summary of Grazing Allotments
Appendix E-1 Common and Scientific Names for Plant Species
Appendix E-2 Common and Scientific Names for Wildlife Species
Appendix F Energy Transportation and Utility Corridor Planning Direction
Appendix G USFWS Biological Opinion

VOLUME III - Comparisons and Recommendations

CHAPTER 1 INTERSTATE SYSTEMS COMPARATIVE ANALYSES
CHAPTER 2 INTRASTATE SYSTEM ALTERNATIVES COMPARISON ANALYSES
CHAPTER 3 CONCLUSIONS AND RECOMMENDATIONS
LIST OF PREPARERS

VOLUME IV - Maps

VOLUME V - Letters and Comments

VOLUME III TABLE OF CONTENTS

Section	Title	Page
	Table of Contents	i
	List of Tables	iv
	List of Figures	iv
1.0	INTERSTATE SYSTEMS COMPARATIVE ANALYSES	
1.1	Introduction	1-1
1.2	Mojave Proposed Action	1-1
1.2.1	Mojave System A (the Proposed System): Mojave, El Paso 400 MMcfd Case (all from Texas) and Transwestern	1-6
1.2.2	Mojave System B: Mojave, El Paso 400 MMcfd Alternative (100/300), Northwest 100 MMcfd Case, and Transwestern	1-10
1.2.3	Mojave System C: Mojave, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case	1-12
1.2.4	Mojave System D: Mojave, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case	1-15
1.2.5	Mojave Alternative A	1-18
1.2.6	Mojave Alternative B	1-19
1.2.7	The Mojave System Best Case	1-21
1.2.7.1	The Mojave Proposal	1-21
1.2.7.2	The Supply Systems: A through D	1-22
1.3	El Dorado Alternative	1-24
1.3.1	El Dorado System A: El Dorado, El Paso 400 MMcfd Case, and Transwestern	1-24
1.3.2	El Dorado System B: El Dorado, El Paso 400 MMcfd Alternative (100/300 Case), Northwest 100 MMcfd Case, and Transwestern	1-31
1.3.3	El Dorado System C: El Dorado, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case	1-33
1.3.4	El Dorado System D: El Dorado, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case	1-35
1.3.5	El Dorado Alternative A	1-38
1.3.6	El Dorado Alternative B	1-39
1.3.7	El Dorado Alternative C	1-40
1.3.8	The El Dorado Proposal Best Case	1-41

VOLUME III

TABLE OF CONTENTS

Section	Title	Page
	Table of Contents	i
	List of Tables	iv
	List of Figures	iv
1.0	INTERSTATE SYSTEMS COMPARATIVE ANALYSES	
1.1	Introduction	1-1
1.2	Mojave Proposed Action	1-1
1.2.1	Mojave System A (the Proposed System): Mojave, El Paso 100 MMcfd Case (all from Texas) and Transwestern	1-9
1.2.2	Mojave System B: Mojave, El Paso 400 MMcfd Alternative (100/300), Northwest 100 MMcfd Case, and Transwestern	1-10
1.2.3	Mojave System C: Mojave, El Paso 600 MMcfd Alternative (300/300 Case), and Northwest 100 MMcfd Case	1-12
1.2.4	Mojave System D: Mojave, El Paso 600 MMcfd Alternative (300/400 Case), and Northwest 200 MMcfd Case	1-15
1.2.5	Mojave Alternative A	1-18
1.2.6	Mojave Alternative B	1-19
1.2.7	The Mojave System best Case	1-21
1.2.7.1	The Mojave Proposal	1-21
1.2.7.2	The Supply System: A through D	1-22
1.3	El Dorado Alternative	1-24
1.3.1	El Dorado System A: El Dorado, El Paso 100 MMcfd Case, and Transwestern	1-24
1.3.2	El Dorado System B: El Dorado, El Paso 400 MMcfd Alternative (300/100 Case), Northwest 100 MMcfd Case, and Transwestern	1-31
1.3.3	El Dorado System C: El Dorado, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case	1-33
1.3.4	El Dorado System D: El Dorado, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 100 MMcfd Case	1-35
1.3.5	El Dorado Alternative A	1-38
1.3.6	El Dorado Alternative B	1-39
1.3.7	El Dorado Alternative C	1-40
1.3.8	The El Dorado Proposal Best Case	1-41

TABLE OF CONTENTS (continued)

Section	Title	Page
1.4	Kern River Proposed Action	1-41
1.4.1	Kern River Proposal	1-46
1.4.2	Kern River Wasatch Variation	1-49
1.4.3	Kern River West Strawberry Variation	1-53
1.4.4	Kern River Salt Creek Canyon Variation	1-55
1.4.5	Kern River North Las Vegas Variation	1-56
1.4.6	Kern River Henderson Variation	1-57
1.4.7	Kern River North Bakersfield Variation	1-58
1.4.8	The Kern River Proposal Best Case	1-59
1.4.8.1	The Utah Variations	1-60
1.4.8.1.1	Kern River Proposal (MP 119-176) Versus West Strawberry Variation	1-60
1.4.8.1.2	Kern River Proposal (MP 180-192) Versus Salt Creek Canyon Variation ..	1-62
1.4.8.1.3	Kern River Proposal (MP 73-204) Including West Strawberry and Salt Creek Canyon Variation Versus the Wasatch Variation	1-62
1.4.8.2	The Nevada Variations	1-67
1.4.8.2.1	Kern River Proposal (MP 496-511) Versus Henderson Variation	1-67
1.4.8.2.2	Kern River Proposal (MP 438-534) Including the Henderson Variation Versus the North Las Vegas Variation	1-68
1.4.8.3	The California Variations	1-69
1.5	Interstate Systems Comparisons	1-69
2.0	INTRASTATE SYSTEM ALTERNATIVES COMPARISON ANALYSES	
2.1	The Integrated Intrastate System Alternative	2-1
2.2	The East Las Vegas/Integrated Intrastate System Alternative	2-1
2.3	Northwest/PGT/Integrated Intrastate System Alternative	2-5
2.4	Comparisons of the Intrastate Systems	2-5

TABLE OF CONTENTS (continued)

Section	Title	Page
1.4	Kern River Proposed Action	1-41
1.4.1	Kern River Proposal	1-46
1.4.2	Kern River Nonacre Variation	1-49
1.4.3	Kern River Deer Strawberry Variation	1-51
1.4.4	Kern River Salt Creek Canyon Variation	1-53
1.4.5	Kern River North Las Vegas Variation	1-56
1.4.6	Kern River Wandawega Variation	1-57
1.4.7	Kern River North Bakersfield Variation	1-58
1.4.8	The Kern River Proposal Base Case	1-59
1.4.8.1	The Utah Variations	1-60
1.4.8.1.1	Kern River Proposal (MP 110-179) Versus West Strawberry Variation	1-60
1.4.8.1.2	Kern River Proposal (MP 130-132) Versus Salt Creek Canyon Variation	1-62
1.4.8.1.3	Kern River Proposal (MP 73-104) Including West Strawberry and Salt Creek Canyon Variation Versus the Wasatch Variation	1-62
1.4.8.2	The Nevada Variations	1-67
1.4.8.2.1	Kern River Proposal (MP 488-511) Versus Henderson Variation	1-67
1.4.8.2.2	Kern River Proposal (MP 438-534) Including the Henderson Variation Versus the North Las Vegas Variation	1-68
1.4.8.3	The California Variations	1-69
1.5	Interstate Systems Cooperations	1-69
2.0	INTERSTATE SYSTEM ALTERNATIVES COMPARISON ANALYSES	
2.1	The Integrated Interstate System Alternative	2-1
2.2	The East Las Vegas/Integrated Interstate System Alternative	2-1
2.3	Northwest/CBTV/Deseret Interstate System Alternative	2-5
2.4	Comparisons of the Interstate Systems	2-6

TABLE OF CONTENTS (continued)

Section	Title	Page
3.0	CONCLUSIONS AND RECOMMENDATIONS	
3.1	General Staff Recommended Mitigation Measures	3-5
3.1.1	Air Quality	3-5
3.1.2	Geology	3-6
3.1.3	Soil	3-7
3.1.4	Surface Water	3-11
3.1.5	Groundwater	3-13
3.1.6	Freshwater Biology	3-14
3.1.7	Terrestrial Biology	3-14
3.1.7.1	Vegetation	3-14
3.1.7.2	Wildlife	3-17
3.1.7.3	Grazing	3-25
3.1.8	Socioeconomics	3-26
3.1.9	Land Use	3-27
3.1.10	Cultural Resources	3-27
3.1.10.1	Archaeology	3-27
3.1.10.2	American Indian Concerns	3-30
3.1.11	Paleontological Resources	3-30
3.1.12	Visual Resources	3-31
3.1.13	Staff Recommended Mitigation Measures for the Mojave Proposal	3-34
3.1.14	Staff Recommended Mitigation Measures for the El Dorado Alternative	3-35
3.1.15	Staff Recommended Mitigation Measures for the El Paso Proposal	3-36
3.1.16	Staff Recommended Mitigation Measures for the Northwest Project	3-37
3.1.17	Staff Recommended Mitigation Measures for the Transwestern Proposal	3-38
3.1.18	Staff Recommended Mitigation Measures for the Kern River Proposal	3-41
3.2	Additional Measures Which the Agencies Sought Comment	3-42
	LIST OF PREPARERS	

TABLE OF CONTENTS (continued)

Section	Title	Page
3.0	CONCLUSIONS AND RECOMMENDATIONS	
3.1	General Staff Recommended Mitigation Measures	3-5
3.1.1	Air Quality	3-5
3.1.2	Geology	3-6
3.1.3	Soil	3-7
3.1.4	Surface Water	3-11
3.1.5	Groundwater	3-13
3.1.6	Freshwater Biology	3-14
3.1.7	Terrestrial Biology	3-14
3.1.7.1	Vegetation	3-14
3.1.7.2	Wildlife	3-17
3.1.7.3	Grazing	3-25
3.1.8	Socioeconomics	3-25
3.1.9	Land Use	3-27
3.1.10	Cultural Resources	3-27
3.1.10.1	Archaeology	3-27
3.1.10.2	American Indian Concerns	3-30
3.1.11	Paleontological Resources	3-30
3.1.12	Visual Resource	3-31
3.1.13	Staff Recommended Mitigation Measures for the Mojave Project	3-34
3.1.14	Staff Recommended Mitigation Measures for the El Dorado Alternative	3-35
3.1.15	Staff Recommended Mitigation Measures for the El Paso Project	3-36
3.1.16	Staff Recommended Mitigation Measures for the Northwest Project	3-37
3.1.17	Staff Recommended Mitigation Measures for the Transwestern Project	3-38
3.1.18	Staff Recommended Mitigation Measures for the Kern River Project	3-41
3.2	Additional Measures Which the Agencies Should Consider	3-42

LIST OF PREPARERS

LIST OF TABLES

Table	Title	Page
1.2-1	Mojave Summary of Impacts	1-2
1.3-1	El Dorado Summary of Impacts	1-25
1.4-1	Kern River Summary of Impacts	1-42
1.4-2	Kern River Best Case	1-63
1.5-1	Interstate Systems Comparisons	1-70
2.1-1	Intrastate Systems Alternatives Summary of Impacts	2-2

LIST OF FIGURES

Figure	Title	Page
1.4-1	The Kern River Proposed Route with the Utah and Nevada Alternatives	1-61

1.0 INTERSTATE SYSTEMS COMPARATIVE ANALYSES

1.1 INTRODUCTION

This document will compare all significant and some insignificant impacts which would be created by the two major proposals. Each proposal and its alternatives/variations will be compared to determine the best case for each of the three major proposals. Once this has been done, comparisons among the best cases will be completed.

1.2 MOJAVE PROPOSED ACTION

The Mojave Pipeline Company proposes to construct an interstate natural gas pipeline from Mohave County, Arizona, to Kern County, California. The proposed Mojave system would be approximately 383 miles long. Three components make up the Mojave system: the Mojave Transfer Line in Mohave County would entail approximately 16.5 miles of new pipeline; the proposed mainline would consist of 322.5 miles of pipe; and the Kern Lateral would include 44 miles of pipeline in the San Joaquin Valley. Table 1.2-1 compares impacts of the Mojave Proposal and its alternatives.

In order to transport natural gas to the EOR fields in the Bakersfield area, the Mojave Pipeline Company must be supplied gas from other pipelines. Two natural gas transmission companies have proposed to supply this gas to Mojave. The El Paso Natural Gas Company and the Transwestern Pipeline Company would supply the 600 MMcfd of natural gas required to meet the needs of the Mojave proposal. Utilization of these companies resulted in four major ways of delivering natural gas to the EOR market. These four systems and alternatives to these systems will be outlined below with a discussion of the major impacts for each.

Systems B and D were included primarily to provide reasonable estimates of facility requirements to supply additional Rocky Mountain gas to Mojave instead of Kern River. No attempt was made to include the potential facilities needed for the 350 MMcfd Kern River proposed to receive from this area since the Mojave sponsors and others have taken the position that some Rocky Mountain gas could be made available to Mojave through other existing systems. Moreover, use of Rocky Mountain gas does not appear to be a requirement for the EOR market. Those interested in the facility requirements that Northwest might need to transport 350 MMcfd or even 700 MMcfd to the Mojave System, in spite of the above discussion, may refer to Volume II, Sections 2.7.2.4 and 2.7.6.

System C was included as an alternative which could eliminate the need for the proposed Transwestern looping of 356 miles of

1 INTRODUCTION

1.1 MAVAS SECOND VERSION

combines the best features of its predecessor with many new features. The new features include a graphical user interface, support for multiple displays, and a new database engine. The graphical user interface is based on the X Window System, which is a standard for graphical user interfaces on Unix systems. The multiple display support allows the user to view the data in different ways, such as a map, a table, or a graph. The new database engine is more powerful and flexible than the old one, and it allows the user to store more data and to access it more quickly.

MAVAS is a powerful tool for analyzing and visualizing data. It is used by scientists, engineers, and other professionals in a wide variety of fields. MAVAS is available for free download from the MAVAS website.

1.1.1 Overview of MAVAS

MAVAS is a software package that allows users to analyze and visualize data. It is written in the C programming language and runs on Unix systems. MAVAS is open source software, which means that the source code is available for anyone to view and modify. MAVAS is distributed under the GNU General Public License, which allows users to use, modify, and distribute the software for free.

MAVAS has a graphical user interface that allows users to interact with the software using a mouse and keyboard. The graphical user interface is based on the X Window System, which is a standard for graphical user interfaces on Unix systems. The X Window System allows users to run multiple applications at the same time and to switch between them easily.

MAVAS has a powerful database engine that allows users to store and retrieve data quickly and efficiently. The database engine is based on the SQLite database engine, which is a popular open source database engine. SQLite is a relational database engine, which means that it stores data in tables and allows users to query the data using SQL.

MAVAS has a number of built-in functions for analyzing and visualizing data. These functions include statistical functions, such as mean, median, and standard deviation, and graphical functions, such as plots, histograms, and scatter plots. MAVAS also has a number of tools for importing and exporting data in different formats, such as CSV, Excel, and HDF5.

MAVAS is a powerful tool for analyzing and visualizing data. It is used by scientists, engineers, and other professionals in a wide variety of fields. MAVAS is available for free download from the MAVAS website.

1.1.2 Installation

To install MAVAS, you will need to download the source code from the MAVAS website. You will also need to have the following software installed on your system:

- A C compiler
- The X Window System
- The SQLite database engine

Once you have downloaded the source code, you can compile and install MAVAS by following the instructions in the README file. The README file is located in the root directory of the MAVAS source code.

After you have installed MAVAS, you can start it by typing `mavas` at the command prompt. The MAVAS graphical user interface will appear. You can then use the mouse and keyboard to interact with the software.

1.1.3 Getting Started

To get started with MAVAS, you can load a data file into the software. MAVAS supports a number of different data formats, including CSV, Excel, and HDF5. To load a data file, click on the "File" menu and select "Open". A dialog box will appear. Navigate to the directory where the data file is located and select the file. Click "Open" to load the file into MAVAS.

Once you have loaded a data file into MAVAS, you can start analyzing and visualizing the data. MAVAS has a number of built-in functions for analyzing and visualizing data. These functions are located in the "Analysis" and "Visualization" menus. To use a function, click on the menu and select the function. A dialog box will appear. Enter the parameters for the function and click "OK" to run the function.

MAVAS has a number of tools for importing and exporting data in different formats. These tools are located in the "File" menu. To import data, click on the "File" menu and select "Import". A dialog box will appear. Navigate to the directory where the data file is located and select the file. Click "Open" to import the data into MAVAS.

To export data, click on the "File" menu and select "Export". A dialog box will appear. Navigate to the directory where you want to save the data file and enter a name for the file. Click "Save" to export the data from MAVAS.

MAVAS is a powerful tool for analyzing and visualizing data. It is used by scientists, engineers, and other professionals in a wide variety of fields. MAVAS is available for free download from the MAVAS website.

1.1.4 Troubleshooting

If you have any problems with MAVAS, you can consult the following troubleshooting guide. If you cannot find a solution to your problem in the troubleshooting guide, you can contact the MAVAS developers for help.

Problem: MAVAS will not start.

Solution: Make sure that you have installed all of the required software. Make sure that you have compiled and installed MAVAS correctly. Check the MAVAS log file for error messages.

Problem: MAVAS crashes when I load a data file.

Solution: Make sure that the data file is in a supported format. Make sure that the data file is not corrupted. Check the MAVAS log file for error messages.

Problem: MAVAS is slow.

Solution: Make sure that you have enough memory and disk space. Close other applications that are using a lot of resources. Try reducing the size of the data file.

Problem: I cannot find a function that I need.

Solution: Check the MAVAS documentation. Ask the MAVAS developers for help.

MAVAS is a powerful tool for analyzing and visualizing data. It is used by scientists, engineers, and other professionals in a wide variety of fields. MAVAS is available for free download from the MAVAS website.

Table 1.2-1

MOJAVE SUMMARY OF IMPACTS

	MOJAVE SYSTEM				MOJAVE 1/ ROUTE		
	System A 2/	System B 3/	System C 4/	System D 5/	Mojave	Alternative A	Alternative B
AIR QUALITY	NSI 6/	NSI	NSI	NSI	NSI	NSI	NSI
GEOLOGY							
Surface fault rupture	18	19	16	17	16	0 (0)	5 (5)
Miles of landslide potential	27	43	80	179	0	0 (0)	0 (0)
Miles of slope greater than 30%	69	74	44	69	25	0 (0)	2 (1)
SOIL							
Acres of poor reclamation potential	4768	4914	3477	4057	2721	230 (162)	770 (764)
SURFACE WATER							
Number of stream crossings	74	78	67	126	34	3 (3)	2 (1)
Intermittent stream crossings	71	75	64	111	31	3 (3)	1 (0)
Perennial stream crossings	3	3	3	15	3	0 (0)	1 (1)
Moderate/high significance perennial stream crossings	0	0	0	9	0	0 (0)	0 (0)
GROUNDWATER							
Miles of potential impact	30	30	22	22	22	0 (0)	15 (20)
FRESHWATER BIOLOGY							
Number of sensitive stream crossings with fish present	0	0	0	0	0	0 (0)	0 (0)
TERRESTRIAL BIOLOGY							
Vegetation							
Total acres of native vegetation temporarily disturbed	8465	8465	6563	8470	3953	280 (206)	908 (910)
Acres of woody vegetation kept cleared for the life of the project	1765	1765	1774	1774	1535	136 (103)	435 (435)
Acres of riparian habitat crossed	61	61	61	71	59	10 (1)	7 (8)

Table 1.2-1 (continued)

MOJAVE SUMMARY OF IMPACTS

	MOJAVE SYSTEM				MOJAVE 1/ ROUTE		
	System A 2/	System B 3/	System C 4/	System D 5/	Mojave	Alternative A	Alternative B
Vegetation (continued)							
Acres of federally threatened or endangered plant habitat affected	60	60	0	75	0	0 (0)	0 (0)
Number of species	1	1	0	2	0	0 (0)	0 (0)
Acres of California state listed plant habitat affected	947	947	947	947	947	0 (0)	12 (12)
Number of species	3	3	3	3	3	0 (0)	1 (1)
Acres of agricultural land temporarily disturbed	767	767	731	915	731	0 (0)	45 (45)
Wildlife							
Big game crucial or high priority habitat (acres)	748	748	564	1553	85	0 (0)	0 (0)
Big game migration corridors (acres)	121	121	121	121	121	0 (0)	0 (0)
Big game fawning/calving area (acres)	56	56	0	0	0	0 (0)	0 (0)
Upland game bird sensitive habitat (acres)	0	0	24	30	0	0 (0)	0 (0)
Waterfowl critical nesting areas (acres)	0	0	0	0	0	0 (0)	0 (0)
Raptor nesting areas (nests)	0	0	0	2	0	0 (0)	0 (0)
Acres of potential threatened or endangered animal habitat	9615	9915	9419	10337	7822	633 (502)	1284 (1236)
Yuma clapper rail	151	151	36	36	127	121 (103)	0 (0)
Bald eagle	187	187	72	84	163	121 (103)	0 (0)
Peregrine falcon	490	490	60	60	163	121 (103)	0 (0)

Table 1.2-1 (continued)

MOJAVE SUMMARY OF IMPACTS

	MOJAVE SYSTEM				MOJAVE 1/ ROUTE		
	System A 2/	System B 3/	System C 4/	System D 5/	Mojave	Alternative A	Alternative B
Wildlife (continued)							
Whooping crane	0	0	0	0	0	0 (0)	0 (0)
California condor	1355	1355	1355	1355	1355	0 (0)	0 (0)
Desert tortoise	3032	3032	3274	3274	2959	270 (193)	921 (921)
Blunt-nosed leopard lizard	517	517	517	517	517	0 (0)	0 (0)
Tehachapi slender salamander	18	18	18	18	18	0 (0)	0 (0)
San Joaquin kit fox	647	647	647	647	647	0 (0)	0 (0)
Black-footed ferret	1345	1645	1567	2473	0	0 (0)	0 (0)
Mohave ground squirrel	727	727	727	727	727	0 (0)	363 (315)
Nelson's antelope squirrel	412	412	412	412	412	0 (0)	0 (0)
Tipton kangaroo rat	24	24	24	24	24	0 (0)	0 (0)
Short-nosed kangaroo rat	410	410	410	410	410	0 (0)	0 (0)
Giant kangaroo rat	300	300	300	300	300	0 (0)	0 (0)
SOCIOECONOMICS							
Population change >10%	No	No	No	No	No	No	No
Total employment change >10%	No	No	No	No	No	No	No
Income change >10%	No	No	No	No	No	No	No
Vacancy rates of temporary housing <5%	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Local tax base change >10%	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Table 1.2-1 (continued)

MOJAVE SUMMARY OF IMPACTS

	MOJAVE SYSTEM				MOJAVE 1/ ROUTE		
	System A 2/	System B 3/	System C 4/	System D 5/	Mojave	Alternative A	Alternative B
Traffic	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Operational noise	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Recreation (conflicts)	5	5	5	5	5	0 (1)	0 (0)
LAND USE/OWNERSHIP Number of conflicts	9	9	6	8	8	0 (3)	0 (1)
CULTURAL RESOURCES Number of sites in the direct impact zone	82	90	91	226	41	0 (0)	8 (11)
NRHP listed or eligible sites in the direct impact zone	2	2	2	6	2	0 (0)	0 (0)
Percentage of line actually surveyed	6	6	8	18	6	0 (22)	15 (1)
High sensitivity segments	8	9	8	13	3	0 (0)	2 (1)
PALEONTOLOGIC RESOURCES Acres of impact to significant formations	3205	3263	2724	3580	1941	0 (0)	640 (793)
VISUAL RESOURCES Acres of high visual impact	0	0	0	0	0	0 (0)	0 (0)

1/ The first entry for each resource area under alternative routing represents the value for the alternative segment only; the value in parenthesis represents the comparable quanity for the portion of the proposed route which would be avoided by using this alternative.

2/ Mojave System A: Mojave, El Paso 400 MMcfd Case (all from Texas) and Transwestern

3/ Mojave System B: Mojave, El Paso 400 MMcfd Alternative 100/300, Northwest 100 MMcfd Case, and Transwestern

4/ Mojave System C: Mojave, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case

5/ Mojave System D: Mojave, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case

6/ NSI = No Significant Impact

pipeline. It includes the assumption that an additional 100 MMcfd would be supplied by Northwest. This assumption, as noted for Systems B and D, may not be necessary. El Paso could supply the entire 600 MMcfd to Mojave from west Texas, again with no involvement by Transwestern. This could require looping of about 108 miles of El Paso's San Juan Crossover system in Texas and New Mexico in addition to most of the facilities required in the 100/500 case. The facilities needed between Bondad and Valve City for the 100/500 case would not be needed. The unnecessary facilities for such a 0/600 case are the compression at Bondad and the 14.6 mile-long Blanco Loop.

This 0/600 case is identified here for information only; analysis of the facilities required along the San Juan Crossover has not been included for four reasons. The first is that the 0/600 case facilities were identified too late for inclusion in the FEIS. Second, since any system not including Transwestern (the 100/500 or the 0/600) would require new filings, the additional impacts could be analyzed if such filings were made. Third, because of the proximity of the El Paso and Transwestern pipelines in New Mexico the impacts are expected to be similar. And finally, the 100/500 case allows the decision-makers to view a representative system without Transwestern to determine whether approval of Transwestern's portion of the project is needed.

1.2.1 Mojave System A (the Proposed System): Mojave, El Paso 400 MMcfd Case (all from Texas) and Transwestern

This system is comprised of the proposed projects of each of these companies; it would entail approximately 754 miles of pipeline broken down into three components: the 383 miles of new pipeline and one new compressor station needed for the Mojave proposal; 14.8 miles of looping of an existing line for the El Paso 400 MMcfd proposal; and approximately 356 miles of loops for the Transwestern Pipeline Company proposal. Transwestern's application states it could deliver up to 320 MMcfd; however, Mojave's proposed capacity is 600 MMcfd and it is currently unknown if Mojave could transport the additional available 120 MMcfd. This document assumes it could not without additional facilities.

The proposed action would not significantly affect air quality concerns along the route in either construction or operation. The proposed compressor station (MJ-1) would meet all applicable state and federal regulations. The compressor station would represent a permanent fixed emission source requiring permits for construction and operation. Construction impacts to air quality would represent a temporary source of both dust and engine emissions. A positive change to air quality in the southern San Joaquin Valley would also occur.

This proposal would cross at least 18 Quaternary surface faults. The potential for surface fault rupture would be greatest in the

western portions of the route. Pipeline design should be capable of withstanding fault ruptures with adequate pipe strength and block valves in appropriate areas.

The pipeline route would contain approximately 27 miles of potential landslide areas. The potential landslide areas would occur along the El Paso and Transwestern routes. In addition to the miles of landslide potential, 69 miles of the route would be constructed in areas with a slope of greater than 30 percent. These areas are concentrated along the Transwestern line and in the Tehachapi Mountains portion of the Mojave line.

Approximately 4,768 acres of the route would occur in areas with soils having a poor reclamation potential. These areas would occur along all three routes. The limiting factor on soils involves both wind and water erosion. The main limiting factor on revegetation of these soils, however, is a lack of precipitation. Based on the climatic regime of the pipeline routes, the potential for stabilizing these soils would be low and would certainly take more than five years.

The route would cross 74 intermittent and perennial streams. Three perennial stream crossings would be necessary.

There would be approximately 30 miles of medium to high potential impacts to groundwater resources. It is unlikely that impacts to groundwater would be significant if the proper mitigation measures were taken during construction. Construction mitigation measures with regard to groundwater should concern the prevention of spills during the fueling and maintenance of construction equipment, and avoidance of adverse effects on springs.

The Mojave proposal would have no impacts to freshwater biology since no sensitive stream crossings were identified.

Although it would temporarily disturb 8,465 acres of native vegetation, the proposed route would not cross unique or extremely sensitive vegetation types except for Joshua trees and cactus which are scattered in the creosote bush and saltbush vegetation types. The route would keep 1,765 acres of woody vegetation, primarily creosote bush, cleared from the operational ROW for the life of the project. Due to the low revegetative potential along the pipeline route, revegetation of the woody plant species may not occur for well over 50 years. Construction of the route would also impact approximately 61 acres of riparian habitat. These habitats, however, should recover quickly.

The proposed route has the potential to impact one federally threatened plant species and its habitat. This would represent approximately 60 acres of federally listed plant species habitat located along the Transwestern route. Three California state listed plant species would be impacted. This plant habitat could occur along 947 acres of the Mojave route.

In addition to the impacts to native vegetation discussed above, the proposed route would temporarily disturb 767 acres of agricultural land, primarily along the Mojave route. Impact would not last over one agricultural season. The proposed route would also permanently remove 158 acres of vineyards and orchards from production.

The proposed Mojave System A route would cross 748 acres of big game high priority/critical habitat, 121 acres of big game migration corridors, and 56 acres of fawning areas. The route would impact no upland game bird sensitive habitat and no raptor nesting areas.

The proposed route would also impact 9,615 acres of habitat of wildlife species of special concern. Table 1.2-1 lists the acres of impacts for individual species. Significantly impacted species habitat would include California condor, desert tortoise, blunt-nosed leopard lizard, San Joaquin kit fox, black-footed ferret, and Mohave ground squirrel. Habitat disturbance to each of these species would all be in excess of 500 acres.

The construction workforce of the proposed route would place a significant but temporary demand on housing and campgrounds in portions of Arizona, New Mexico, and in San Bernardino County, California. This would inconvenience travelers and campers seeking accommodations if construction occurred during tourist seasons. Property tax revenues would increase more than 10 percent in five counties crossed by the pipeline, a significant positive impact. Other positive but not significant impacts would occur in total employment and overall income changes.

The proposed route would have no significant impacts to traffic since major roads along the route would be crossed by boring beneath them. Noise impacts caused by construction would be of a temporary nature and would only occur during working hours. Since the majority of the proposed route occurs in relatively uninhabited areas, noise resulting from construction would not present a problem. Noise resulting from compressor station operation would be monitored and should be below an L_{dn} of 55 dBA level used by FERC as being potentially significant at 2noise sensitive areas. The compressor station would be located in a low population area and noise levels would not exceed 50 dBA outside of the fenced boundary of the compressor station.

The proposed route would conflict with the operation of five recreation areas. These impacts would generally be temporary in nature but could produce significant impacts to the Parker 400 ORV race route. Other significant impacts could occur along the Pacific Crest National Scenic Trail, Tehachapi Mountain Park, and Kern River County Park with interruption of traffic, noises, and disturbance of vegetation, soils, park facilities, and the natural visual scene.

Additional impact to recreation facilities would involve increased usage of park facilities by construction workers. This impact would be temporary and not significant.

Major, probably permanent, visual impact would be experienced at the Tehachapi Mountain Park and the Kern River County Park. Significant temporary impact would include severe traffic disruption and noise.

The proposed route would conflict with zoning regulations around the Golden Shores Subdivision along the Mojave Transfer Line. The Transfer Line would also conflict with the land use of the Havasu National Wildlife Refuge and lies outside of utility corridors in the Yuma BLM District. The route would be outside of the BLM California Desert Conservation Area utility corridor between Pisgah and Boron in San Bernardino County. The BLM policy is to follow the corridor whenever possible. The route has the potential to conflict with the land use plans of Edwards Air Force Base in Kern County. Conflict exists in the Stallion Springs Community, Tehachapi Mountain Park and Kern River State Park.

Part of Transwestern's Loop G would not be in conformance with the Coconino National Forest Plan. This conflict could be easily resolved by keeping Loop G north of the existing line in the vicinity of the Fort Valley Experimental Forest.

The System A route contains eight 25-mile segments which have a high cultural resources sensitivity rating. This sensitivity rating is based on estimated site density within the analysis corridor as determined by previous surveys, the presence of both State and National Register properties, the crossing of Indian reservation lands, and terrain analysis, e.g., presence of major water sources (see Cultural Resources Technical Report for more details). Compliance procedures should provide adequate mitigation of potential significant impacts.

Approximately 3,205 acres of significant paleontological formations would be crossed by the proposed route. Since this figure indicates potentially significant areas, it is difficult to determine the exact amount of significant formations. Implementation of the mitigation measures in this document would reduce the potential impacts to paleontological resources to insignificance.

No areas with potentially high visual impact have been identified. This is primarily due to the nature of the proposed action since all but 383 miles would consist of looping existing pipeline. The new construction along the Mojave route in the Mojave Desert would primarily occur adjacent to existing pipelines and thus would not constitute a visual intrusion.

1.2.2 Mojave System B: Mojave, El Paso 400 MMcfd Alternative (100/300 Case), Northwest 100 MMcfd Case, and Transwestern

The four component System B alternative would entail approximately 777 miles of pipeline. The Mojave and Transwestern portions of the route would remain the same as those discussed in Section 1.2.1. Under this alternative El Paso would require 29.4 miles of looping (three loops) and 3,580 hp of compression. Northwest would deliver 100 MMcfd to El Paso at the Bondad Compressor Station. This system would require 8.1 miles of expansion looping on Northwest's line. This single loop would be the Muddy Creek Loop in southwestern Wyoming, beginning at the Muddy Creek Compressor Station. The looping would consist of 24-inch O.D. pipe. Three new compressor stations would be also added, one at Topock as proposed for System A, the Cisco and Cahone stations for Northwest, as well as the additional compression at the Bondad, Green River, and Ignacio stations.

This alternative would still supply 720 MMcfd of natural gas to the Mojave Pipeline Company at Topock, Arizona.

This alternative action would not significantly affect air quality concerns along the route for either construction or operation. The compressor stations would meet all state and federal regulations.

This alternative would encounter at least 19 Quaternary faults. The potential for surface fault rupture would be greatest in the western portions of the Mojave route. Adequate pipeline design criteria should mitigate hazards associated with the faults.

The alternative would contain approximately 43 miles of potential landslide areas, 16 more miles than for the System A route. The majority of the landslide potential would occur on the El Paso route. Approximately 74 miles of the route would be built in areas with slopes of greater than 30 percent. This is five more miles of potentially unstable areas on the El Paso line.

Approximately 4,914 acres of the route would occur in areas with soils having a poor reclamation potential. This represents 146 fewer acres with poor reclamation potential than with the System A route. The limiting factor on soils again is the lack of precipitation in the region.

This route would cross 78 intermittent and perennial streams, four more than the previously discussed route. A total of three perennial stream crossings would be necessary, the same as discussed for System A. None of the perennial stream crossings have a moderate or high significance rating.

The potential for impact to groundwater resources could occur along 30 miles of the route, the same as discussed above.

1.2.2 Mojave System By Mojave, El Paso and Mojave Alternative (120/230 Cases). Northwest and Mojave Case, and Transwestern

The four component System B alternative would entail approximately 777 miles of pipeline. The Mojave and Transwestern portions of the route would remain the same as those discussed in Section 1.2.1. Under this alternative El Paso would require 29.4 miles of looping (three loops) and 3,580 hp of compression. Northwest would deliver 100 MMcfd to El Paso at the Ponded Compressor Station. This system would require 5.1 miles of expansion looping on Northwest's line. This single loop would be the Muddy Creek loop in southwestern Wyoming, beginning at the Muddy Creek Compressor Station. The looping would consist of 24-inch O.D. pipe. Three new compressor stations would be also added, one at Topock as proposed for System A, the Cisco and Canons stations for Northwest, as well as the additional compression at the Bonnad, Green River, and Ignacio stations.

This alternative would still supply 720 MMcfd of natural gas to the Mojave Pipeline Company at Topock, Arizona.

This alternative action would not significantly affect air quality concerns along the route for either construction or operation. The compressor stations would meet all state and federal regulations.

This alternative would encounter at least 19 Quaternary faults. The potential for surface fault rupture would be greatest in the western portions of the Mojave route. Adequate pipeline design criteria should mitigate hazards associated with the faults.

The alternative would contain approximately 43 miles of potential landslide areas. 16 more miles than for the System A route. The majority of the landslide potential would occur on the El Paso route. Approximately 11 miles of the route would be built in areas with slopes of greater than 30 percent. This is five more miles of potentially unstable areas on the El Paso line.

Approximately 4,814 acres of the route would occur in areas with soils having a poor reclamation potential. This represents 140 fewer acres with poor reclamation potential than with the system A route. The limiting factor on soils again is the lack of precipitation in the region.

This route would cross 73 intermittent and perennial streams, four more than the previously discussed route. A total of three perennial stream crossings would be necessary, the same as discussed for System A. None of the perennial stream crossings have a moderate or high significance rating.

The potential for impact to groundwater resources could occur along 10 miles of the route, the same as discussed above.

Mitigation measures should virtually eliminate the potential for impact.

As with the routing discussed above, there would be no impacts to freshwater biology.

System B would temporarily disturb 8,465 acres of native vegetation and like the System A proposal would not cross unique or extremely sensitive vegetation types except for Joshua trees and cactus which are scattered in the creosote bush and saltbush vegetation types. This routing would result in the same acres of temporary disturbance to native vegetation types as System A.

The route would keep 1,765 acres of woody vegetation, primarily creosote bush and other shrubby species, cleared from the operational ROW for the life of the project. This represents the same number of acres of permanent disturbance as was discussed above for System A. The construction of the route would affect approximately 61 acres of riparian habitat, similar to that discussed for the previous system.

This route has the potential to impact one federally threatened plant species and its habitat, the same as the System A route. This would represent approximately 60 acres of federally listed plant species habitat, the same as System A. Three California state listed plant species would be impacted. These plant habitats could occur along 947 acres of the Mojave route, the same as those discussed for System A.

This routing would temporarily disturb 767 acres of agricultural land, the same as for the route discussed above. This route would also permanently remove the same number of acres of orchards and vineyards from production.

System B would cross 748 acres of big game high priority/critical habitat, 121 acres of big game migration corridors, and 56 acres of big game fawning areas. The crossing of critical habitat and migration corridors would be the same as would occur on the System A route. The System B route would impact no upland game bird sensitive habitat and would not impact any raptor nesting areas.

The System B route would impact 9,915 acres of habitat of wildlife species of special concern. Significantly impacted habitat would include that of the California condor, desert tortoise, blunt-nosed leopard lizard, San Joaquin kit fox, black-footed ferret, and Mohave ground squirrel. Table 1.2-1 shows the direct comparisons on all wildlife species of special concern. This increase over System A is in black-footed ferret habitat.

The construction workforce would place a significant but temporary demand on housing and campgrounds in the Wyoming, Arizona, New Mexico, and San Bernardino County areas. Property

tax revenues would increase more than 10 percent in five counties crossed by the pipelines.

As with System A, this alternative would have no significant impacts on traffic. Noise levels would be similar to those discussed above; however, since three new compressor stations would be required along with the additional compression required at Bondad, Green River, and Ignacio this route would create more permanent noise.

This route would have similar impacts to recreation areas and land use as those discussed for System A.

The System B route contains nine 25-mile segments having a high cultural resources sensitivity rating, one more than System A. Archaeological compliance procedures, however, should mitigate the potential significant impacts.

Approximately 3,263 acres of significant paleontological formations would be crossed by this route. This would be 58 more acres than the System A route.

No areas of potentially high visual impact have been identified for either System A or System B.

1.2.3 Mojave System C: Mojave, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case

This three-component alternative would entail approximately 587 miles of pipeline construction. The Mojave proposal under this scenario would not require the Mojave Transfer Line since all of the gas required to supply Mojave would come from the El Paso line. The El Paso 600 MMcfd Alternative (100/500 Case) would require 211.9 miles of looping of an existing El Paso line running from the Bondad Compressor Station in La Plata County, Colorado, to Topock in Mohave County, Arizona, as well as additional compression at Bondad. This would be accomplished by constructing thirteen separate loops of primarily 34-inch O.D. pipe.

The 100/500 Case would receive 100 MMcfd of natural gas from Northwest. The Northwest facilities would remain unchanged from those discussed for System B.

System C could supply 600 MMcfd of natural gas to the Mojave Pipeline Company receipt point at Topock. It would provide the exact amount of gas that Mojave has proposed to carry in its application.

This alternative would not significantly affect air quality along the route in either construction on operation. The three new compressor stations and additional compression at three other stations would meet all applicable state and federal air quality

regulations. Air quality concerns, therefore, would be similar to those for System B.

This alternative would encounter at least 16 Quaternary surface faults, two and three fewer than for either Systems A or B, respectively. Design criteria should be addressed to minimize the effects of fault rupture. All of these are on the Mojave mainline and laterals.

This route would contain approximately 80 miles of potential landslide areas. These 80 miles represent a 56 and 37-mile increase over those discussed in Systems A and B. In addition to the miles of landslide potential, 44 miles of the route would be constructed in areas with a slope greater than 30 percent. This would be 25 and 30 fewer miles than those identified for the System A and B routes respectively.

Approximately 3,477 acres along the alternative route would occur in areas with soils having poor reclamation potential. This acreage is 1,291 fewer than for the proposal discussed for System A, and 1,437 fewer acres than identified for System B. Again reclamation potential is primarily tied to precipitation and thus the Mojave and El Paso routes account for most of these acres.

This route would cross 67 intermittent and perennial streams; seven fewer than for System A and 11 fewer than for System B. It would cross three perennial streams, unchanged from the proposals discussed above. None of these stream crossings would have moderate to high significance, the same as identified for both Systems A and B.

Approximately 22 miles of groundwater resources could be adversely affected. This represents 8 fewer miles than for Systems A or B. Again, mitigation measures, particularly oriented toward preventing refueling spills, should mitigate the affects to groundwater.

This system, like the other two, would have no significant impacts to freshwater biological resources.

System C would temporarily disturb 6,563 acres of native vegetation, 1,902 fewer acres than for Systems A and B. No unique or extremely sensitive vegetation types except for Joshua trees and cactus would be crossed. This route would keep 1,774 acres of woody vegetation cleared from the operational ROW for the life of the project. This is nine more acres than were identified for the System A and B routes. Construction of this route would impact approximately 61 acres of riparian habitat, the same as for Systems A and B.

This route would not impact any federally threatened or endangered plant species, one fewer than either the System A or B routes. No acres of federally threatened or endangered plant species habitat would be impacted, 60 fewer than either System A

or B. Three California state listed plant species would be impacted. This plant habitat could occur along 947 acres of the Mojave route and would not represent any increase or decrease over the two previously discussed systems.

This route would also temporarily disturb 731 acres of agricultural land, 36 fewer than either System A or B. Again, these impacts would not last beyond one agricultural season. The route would permanently remove 158 acres of orchards and vineyards from production.

The Mojave System C route would impact 564 acres of big game high priority/critical habitat. This is 184 fewer than either the System A or B routes. The impacts to big game migration corridors would remain unchanged. There would be impact to 56 fewer acres of fawning areas. Impacts to upland game bird sensitive habitat would be 24 acres, as opposed to no impacts for either the System A or B route. The route would not impact any raptor nests, unchanged from the System A and B routes.

The alternative route would also impact 9,419 acres of wildlife habitat of species of special concern. This represents an decrease of 196 acres over System A and a decrease of 496 over System B. There would be an increase in the habitat of the desert tortoise. System C would affect more black-footed ferret habitat than System A but less than System B. Significantly impacted habitat would include that for the California condor, desert tortoise, blunt-nosed leopard lizard, San Joaquin kit fox, black-footed ferret, and Mohave ground squirrel.

The construction workforce would place a significant but temporary demand on housing and campgrounds in southwestern Wyoming, and portions of Arizona, New Mexico and San Bernardino County in California. This impact would remain essentially the same as discussed above, although impacts in Arizona and New Mexico may not be as severe since both El Paso and Transwestern workforces would not be in the area simultaneously. Property tax revenues would increase more than 10 percent in only one county crossed by the pipeline.

Traffic and noise impacts would remain similar to those discussed for System B. Impacts to recreational facilities would also remain similar to those discussed for Systems A and B.

The proposed route would not conflict with zoning regulations around the Golden Shores Subdivision nor the Havasu NWR since the Mojave Transfer Line would not be needed. The westernmost 4.2 miles of the Flagstaff Loop of the El Paso alternative would be in conflict with the Coconino National Forest's Elden Environmental Study Area. The conflicts associated with the Transwestern line concerning the Coconino National Forest Plan would not be present. The remainder of the land use problems would remain the same as those discussed for both the System A and B routes.

System C contains eight 25-mile segments with a high cultural resources sensitivity rating, one less sensitive segment than System B and the same number of sensitive segments as System A. Compliance procedures should provide adequate mitigation to avoid potentially significant impacts caused by construction.

System C could impact 2,724 acres of significant paleontological formations. This represents 481 fewer than for System A and 539 fewer than for System B.

No areas of potentially high visual impact have been identified along this routing alternative.

1.2.4 Mojave System D: Mojave, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case

This three-component alternative would entail approximately 752 miles of pipeline construction. The Mojave proposal under this scenario would not require the Mojave Transfer Line since all of the gas required to supply Mojave would come from the El Paso line. The El Paso 600 MMcfd Alternative (200/400 Case) would require 223.7 miles of looping of an existing El Paso line running from the Bondad Compressor Station in La Plata County, Colorado, to Topock in Mohave County, Arizona. This would be accomplished by constructing 13 separate loops of primarily 34-inch O.D. pipe. Additional compression would be required at two existing compressor stations.

Northwest would transport 200 MMcfd down its Sumas, Washington, to Ignacio, Colorado, line. This gas delivery would require facility expansions between the Muddy Creek Compressor Station in Wyoming to Ignacio, Colorado. These expansions would consist of 162 miles of looping in seven sections as well as construction of two new compressor stations. The looping would consist of 24-inch O.D. pipe.

System D could supply 600 MMcfd of natural gas to the Mojave Pipeline Company receipt point at Topock. It would provide the exact amount of gas that Mojave has proposed in its application.

This alternative system would not significantly affect air quality along the route for either construction on operation. The three new compressor stations and additional compression at four others would meet all applicable state and federal air quality regulations. Air quality concerns, therefore, would be similar to those discussed for System C.

System D would encounter at least 17 Quaternary surface faults, one fewer than System A, two fewer than System B, and one more than System C. Again, design criteria should be addressed to minimize the effects of fault rupture.

This route would contain approximately 179 miles of potential landslide areas. The majority of the landslide areas would occur along the Northwest route particularly in the vicinity of Rangely Loops A and B. These 179 miles represent a 152 and 136-mile increase over those discussed in Systems A and B, and a 99-mile increase over System C. In addition to the miles of landslide potential, 69 miles of the route would be constructed in areas with a slope greater than 30 percent. This would be the same as for System A, five fewer miles than those identified for System B, and 25 more miles than those identified for System C.

Approximately 4,057 acres along the alternative route would occur in areas with soils having poor reclamation potential. This acreage is 711 and 857 fewer than for Systems A and B respectively and 580 more than for System C. Again reclamation potential is primarily tied to precipitation and thus the Mojave and El Paso routes account for most of these acres.

This route would cross 126 intermittent and perennial streams, of which 15 are perennial. Nine of these stream crossings would have moderate to high significance with all of the significant crossings occurring on the Northwest line. This would be 52, 48, and 59 more perennial and intermittent stream crossings than Systems A, B, and C, respectively, 12 more perennial stream crossings than Systems A, B, and C, and nine more moderate to high significance stream crossings than Systems A, B, or C.

Approximately 22 miles of groundwater resources could be adversely affected. This represents 8 fewer miles than those identified for Systems A and B, respectively, and the same as were identified for System C. Again, mitigation measures, particularly geared toward preventing refueling spills and disruption of springs should mitigate the effects to groundwater.

This system, like the other three, would have no significant impacts to freshwater biological resources.

System D would temporarily disturb 8,470 acres of native vegetation, 5, 5, and 1,907 more than identified for Systems A, B, and C, respectively. No unique or extremely sensitive vegetation types except for Joshua trees and cactus would be crossed. This route would keep 1,774 acres of woody vegetation cleared from the operational ROW for the life of the project. This is nine more than for the System A and B routes, and the same as would be disturbed by the System C route. Construction of this route would impact approximately 71 acres of riparian habitat, ten more acres of disturbance than would occur on Systems A, B, or C.

This route could impact two federally threatened or endangered plant species, one more than for the System A, B, or C routes. Seventy-five acres of federally threatened or endangered plant species habitat could be impacted, 15 acres more than Systems A or B and 75 acres more than for System C. Three California state

listed plant species would be impacted. This plant habitat could occur along 947 acres of the Mojave route and would not represent any increase or decrease over the three previously discussed systems.

This route would also temporarily disturb 915 acres of agricultural land, 148 more than Systems A or B and 184 more than discussed for System C. Again, these impacts would not last beyond one agricultural season. The route would permanently remove 158 acres of orchards and vineyards from production, unchanged from the systems discussed above.

The Mojave System D route would impact 1,553 acres of big game high priority/critical habitat. This is 805 more than the System A and B routes and 989 more than the System C route. The impacts to big game migration corridors would remain unchanged. The impacts to fawning areas would occur on 56 fewer acres than for Systems A and B and would be unchanged from System C. Impacts to upland game bird sensitive habitat would be on 30 acres more than either System A or B, and six more acres than the System C route. The route would also impact two raptor nests, as opposed to no impacts for Systems A, B, or C.

The route would also impact 10,337 acres of wildlife habitat of species of special concern. This represents an increase of 722 acres over System A, 422 acres over B, and a 918-acre increase over System C. These increases would occur for the habitats of the desert tortoise and black-footed ferret. Significantly impacted habitat would include that of the California condor, desert tortoise, blunt-nosed leopard lizard, San Joaquin kit fox, black-footed ferret, and Mohave ground squirrel.

The construction workforce of System D would place a significant but temporary demand on housing and campgrounds in areas of Wyoming, Colorado, Utah, portions of Arizona and New Mexico, and San Bernardino County in California. This impact would remain essentially the same as that discussed for System C. Property tax revenues would increase more than 10 percent in three counties crossed by the pipeline.

Traffic and noise impacts would remain essentially unchanged from those discussed for System C. Impacts to recreational facilities would remain essentially unchanged from those discussed for System B.

System D would not conflict with zoning regulations around the Golden Shores Subdivision nor with the Havasu NWR since the Mojave Transfer Line would not be needed. The westernmost 4.2 miles of the Flagstaff Loop of the El Paso 200/400 Alternative would be in conflict with the Coconino National Forest's Elden Environmental Study Area. Other potential land use conflicts could occur along the Northwest route in the vicinity of Moab, Utah, where the first 1.5 miles of the Moab Loop would be within substantial residential and commercial development and east of

Arches National Park, where the Cisco Loop would be adjacent to the Lost Springs WSA. The conflicts associated with the Transwestern line concerning the Coconino National Forest Plan would not be present. The remainder of the land use problems would remain the same as those discussed for System A.

System D contains three 25-mile segments with a very high cultural resources sensitivity rating and ten 25-mile segments with a high sensitivity rating. This represents a significant increase over any of the systems previously discussed. Compliance procedures should provide adequate mitigation to potential significant impacts caused by construction.

System D could impact 3,580 acres of significant paleontological formations. This represents 375, 317, and 856 more than Systems A, B, and C, respectively.

No areas of potentially high visual impact have been identified along this routing alternative.

1.2.5 Mojave Alternative A

Alternative A (Map 1, sheets 11-12) is an alternative to the proposed Mojave Transfer Line. It would follow BLM utility corridors occupied by an existing transmission line in one case and Interstate 40 and an existing El Paso ROW in the other case. It would be in Mohave County, Arizona.

Alternative A would entail construction of 23 miles of pipeline compared with the 16.5 miles of construction necessary for the Mojave Transfer Line.

Impacts to air quality and geology would remain unchanged from those for the Mojave Transfer Line.

The Mojave Alternative A route would include 230 acres of area with soils with a poor reclamation potential compared to 162 acres for the Mojave Transfer Line.

Surface water and freshwater biology impacts would likely remain unchanged from those for the Mojave Transfer Line. However, since the route is four miles from the nearest surface water the potential for impact would be less.

There is little potential for groundwater impacts along Alternative A.

The Alternative A route would temporarily disturb 280 acres of native vegetation compared with 206 acres for the Mojave Transfer Line. Alternative A would keep 136 acres of woody vegetation cleared from the operational ROW for the life of the project while the Mojave Transfer Line would keep 103 acres of woody vegetation permanently cleared for the life of the project.

Arches National Park, where the Cisco Loop would be adjacent to the Lost Spring WSA. The conflicts associated with the Transwestern line concerning the Coconino National Forest Plan would not be present. The feasibility of the land use problems would remain the same as those discussed for System A.

System D contains three 25-mile segments with a very high cultural resources sensitivity rating and ten 25-mile segments with a high sensitivity rating. This represents a significant increase over any of the systems previously discussed. Compliance procedures should provide adequate mitigation to potential significant impacts caused by construction.

System D could impact 1,520 acres of significant paleontological formations. This represents 37%, 31%, and 15% more than System A, B, and C, respectively.

No areas of potentially high visual impact have been identified along this routing alternative.

1.2.5 Mojave Alternative A

Alternative A (Map I, sheets 11-12) is an alternative to the proposed Mojave Transfer Line. It would follow SCE utility corridors occupied by an existing transmission line in one case and Interstate 40 and an existing El Paso ROW in the other case. It would be in Mohave County, Arizona.

Alternative A would entail construction of 23 miles of pipeline compared with the 16.5 miles of construction necessary for the Mojave Transfer Line.

Impacts to air quality and geology would remain unchanged from those for the Mojave Transfer Line.

The Mojave Alternative A route would include 330 acres of area with soils with a poor reclamation potential compared to 167 acres for the Mojave Transfer Line.

Surface water and freshwater biology impacts would likely remain unchanged from those for the Mojave Transfer Line. However, since the route is four miles from the nearest surface water the potential for impact would be less.

There is little potential for groundwater impacts along Alternative A.

The Alternative A route would temporarily disturb 280 acres of native vegetation compared with 320 acres for the Mojave Transfer Line. Alternative A would keep 112 acres of woody vegetation cleared from the operational ROW for the life of the project while the Mojave Transfer Line would keep 160 acres of woody vegetation permanently cleared for the life of the project.

Alternative A would impact approximately 10 acres of riparian habitat compared with only one acre on the Mojave Transfer Line.

Neither Alternative A nor the Mojave Transfer Line routes would involve impact to federally listed plant species or their habitat.

The Alternative A route would involve no change in the effect of the project on the number of acres of big game high priority/ critical habitat, big game migration corridors, upland game bird sensitive habitat, and raptor nesting areas.

The Alternative A route would have 633 acres of impact to the wildlife habitat of species of special concern as opposed to 502 acres for the Mojave Transfer Line. These increased impacts would be confined to the Yuma clapper rail, bald eagle, peregrine falcon, and desert tortoise. The likelihood of impact to these species, however, would be reduced since the habitat is not as conducive as the habitat along the Transfer Line.

Socioeconomic, noise, and recreation impacts along Alternative A would remain similar to those discussed for the Mojave Transfer Line. Traffic impact would be less for Alternative A.

Alternative A would have fewer land use conflicts. The location of Alternative A would resolve the zoning problems around the Golden Shores Subdivision and would eliminate the minor potential for impact to the Havasu National Wildlife Refuge and would be within a designated utility corridor through the Yuma District of the BLM.

No changes in the number or kinds of impacts concerning cultural, paleontological, or visual resources were identified along the Alternative A route when compared to the Mojave Transfer Line.

1.2.6 Mojave Alternative B

Alternative B (Map 1, sheets 13-14) follows BLM-designated utility planning corridor G/All American Pipeline ROW between Pisgah and Boron, California. It departs from the proposed Mojave mainline route at about MP 115 and ties back in near MP 191.

Alternative B would entail the same amount of pipeline construction (76 miles) as the replaced portion of the Mojave Mainline.

Alternative B would not cause additional impacts to air quality. Except for a one mile increase of slope greater than 30 percent, Alternative B would have the same geological impact as the replaced portion of the Mojave Mainline.

Alternative B would have 770 acres of impacts to soils with poor reclamation potential compared with 764 acres for the replaced portion of the line.

Impacts to surface water with regard to stream crossings would increase by one. This would occur in intermittent stream crossings and would not be significant.

Groundwater impacts along Alternative B could be five miles less than the replaced portion of the route.

No change in impacts to freshwater biology would occur.

Since Alternative B is essentially the same length as the replaced portion of the mainline and since it traverses similar vegetative types, there are no significant differences in the total number of acres of native vegetation temporarily disturbed, acres of woody vegetation kept cleared for the life of the project, acres of riparian habitat crossed, acres of agricultural land temporarily disturbed, or the number of federally threatened or endangered plant species or California state listed plant species affected.

The Mojave Alternative B route would cause no different impact to general wildlife concerns than the proposed action (see Table 1.2-1).

The Alternative B route would cause 1284 acres impact to the habitat of wildlife species of special concern compared with 1236 acres of impact to the replaced portion of the mainline. This increase in impacts would occur only in the habitat of the Mohave ground squirrel, where Alternative B would impact 363 acres of habitat as opposed to 315 acres of disturbance associated with the mainline portion of the route.

Impacts to socioeconomics including permanent noise and recreation would remain unchanged for the Alternative B route. Traffic impacts would be more extensive but insignificant.

One land use conflict would be resolved by utilizing Alternative B. Alternative B is entirely within an existing utility corridor across BLM lands in California. Utilizing the utility corridor, however, may involve additional conflicts with residential areas in Daggett, Barstow, and Boron.

Two 25-mile segments having high cultural resources sensitivity ratings are found along Alternative B, one more than would be found along the replaced portion of the mainline.

Significant paleontological resources would occur within 640 acres along Alternative B; the Mojave mainline portion it would replace contains 793 acres of significant formations.

The Alternative B route contains no areas of high visual significance and thus remains unchanged from the mainline.

1.2.7 The Mojave System Best Case

1.2.7.1 The Mojave Proposal

The environmentally preferable Mojave System is System C described in Section 1.2.3 using Alternative B as described below. This decision was made by comparing the data listed in Table 1.2-1 and deciding which of the Mojave Systems and Alternatives would have the least impact to the physical and social environment.

Based on the discussions above, the combination of Mojave's proposed and alternative routes with the least environmental impact includes Alternative B. The U.S. Fish and Wildlife Service (USFWS) has expressed opposition to the Mojave Transfer Line because two portions of it, totaling under three miles in length, are within the boundaries of the Havasu National Wildlife Refuge. The USFWS favors the use of Alternative A. The extra distance and cost of the Alternative A route is not warranted by the minimal environmental effects which would occur in the refuge. No wetland areas would be affected by the Mojave Transfer Line, since all of the route is on the opposite side of Highway 95 from the body of the refuge, and all of the route is immediately adjacent to existing El Paso pipelines, some of which have been installed within the last two to three years. With the exception of avoiding the fringes of the NWR, minor portions of the Fort Mojave Indian Reservation and the Golden Shores Subdivision, and the lower potential for impact to groundwater, all other environmental aspects of Alternative A are similar to or worse than to the proposal. In addition, it is seven miles longer and would cost about $2,800,000 more than the proposal, an increase of about 40 percent. In addition, it should be understood that the mainline also crosses the refuge, as must any project involving a crossing of the Colorado River. Recognizing that there is a difference of opinion concerning the routing of the Mojave Transfer Line through the refuge, the staff will not oppose the use of Alternative A, but it will not ask the FERC to require it either.

Alternative B would be completely within a designated utility corridor. Although it would be closer to residential areas than the proposed route, it should have no significant effect on existing residences beyond the construction period. Most of the route near Barstow is within floodplain areas of the Mojave River where development is unlikely to occur. Near Daggett the route would be adjacent to Interstate 40 where development is unlikely; moreover, it would be immediately adjacent to PG&E's existing pipeline and would therefore constitute no new impediment to development. No development currently exists along either Alternative B or the proposed route near Boron. For this reason

The Alternative 3 route contains no areas of high visual significance and thus remains unchanged from the existing.

1.3.7 The Mojave System Base Case

1.3.7.1 The Mojave Proposal

The environmentally preferable Mojave System is System C described in Section 1.3.3 using Alternative B as described below. This decision was made by comparing the data listed in Table 1.3-1 and deciding which of the Mojave System and Alternatives would have the least impact to the physical and social environment.

Based on the discussions above, the combination of Mojave's proposed and alternative routes with the least environmental impact includes Alternative B. The U.S. Fish and Wildlife Service (USFWS) has expressed opposition to the Mojave Transfer Line because two portions of it, totaling under three miles in length, are within the boundaries of the Havasu National Wildlife Refuge. The USFWS favors the use of Alternative A. The extra distance and cost of the Alternative A route is not warranted by the minimal environmental effects which would occur in the refuge. No wetland areas would be affected by the Mojave Transfer line, since all of the route is on the opposite side of Highway 95 from the body of the refuge, and all of the route is immediately adjacent to existing El Paso pipelines, some of which have been installed within the last two to three years. With the exception of avoiding the fringes of the IWA, minor portions of the Fort Mojave Indian Reservation and the Golden Shores Subdivision, and the lower potential for impact to groundwater, all other environmental aspects of Alternative A are similar to or worse than to the proposal. In addition, it is seven miles longer and would cost about $2,800,000 more than the proposal, an increase of about 40 percent. In addition, it should be understood that the mainline also crosses the refuge, as must any project involving a crossing of the Colorado River. Recognizing that there is a difference of opinion concerning the routing of the Mojave Transfer Line through the refuge, the staff will not oppose the use of Alternative A, but it will not ask the FERC to require it either.

Alternative B would be completely within a designated utility corridor. Although it would be closer to residential areas than the proposed route, it should have no significant effect on existing residences beyond the construction period. Most of the route near Bertow is within floodplain areas of the Mojave River where development is unlikely to occur. Near Daggett the route would be adjacent to Interstate 40 where development is unlikely; moreover, it would be immediately adjacent to PG&E's existing pipeline and would therefore constitute no new impediment to development. No development currently exists along either Alternative B or the proposed route near Boron. For this reason

the relative impact of the alternative and the proposed route is the same. Further, use of El Dorado's proposed alignment between Daggett and Boron avoids the floodplain and existing residential areas in Barstow.

1.2.7.2 The Supply Systems: A through D

The air quality impacts for all of the systems would be similar.

Impacts to geology would be quite different along the four systems. The System C route would only cross 16 potential surface fault rupture areas, two fewer than System A, three fewer than System B, and one less than System D. In addition, only 44 miles of areas with slopes greater than 30 percent would be crossed. This is significantly lower than either the System A, B, or D routes. Finally, although the System C route would affect more miles of route with potential landslide and slope stability problems than System A or B, the areas would generally occur in arid regions of New Mexico and Arizona rather than in the mountainous portions of the Rocky Mountains in Colorado which would occur along the System D route. Based on these findings, impact to geology would be less on the System C route.

Impacts to soils would occur along all routes; however, since the System C route represents the fewest miles of construction and yet generally crosses the same types of soils as the other systems, it would have the fewest acres with poor reclamation potential.

Surface water impacts would be quite different along the four system routes. The most pertinent categories in Table 1.2-1 would be perennial stream crossings and moderate/high significance stream crossings. Using these two categories, the Systems A, B, and C would have less impact to surface water, and substantially less than System D.

Possible impacts to groundwater vary between 96 and 134 miles among the four routes. This is based primarily upon the miles of construction within the areas where there is a moderate to high use of shallow groundwater. Using mileage as a determining criterion, Systems C and D would have the least potential impacts to groundwater resources although groundwater impacts would be few if adequate mitigation measures were employed.

None of the four system routes would have any adverse impacts to freshwater biology.

Impacts to vegetation can be divided into two subcategories: general vegetation disturbance and impacts to threatened and endangered species. Impacts to general vegetation would be generally dependent on the miles of construction (see Table 1.2-1). Based on these figures, the System C route would have less impact than either the System A, B, or D routes. Impacts to

threatened or endangered plant species would be of more concern than those to general vegetation. The System C route would have the least potential to significantly impact threatened or endangered plants.

Wildlife impacts can also be divided into two subcategories: general wildlife disturbance and disturbance to threatened or endangered species. In this instance, the System C route has the potential to impact fewer wildlife species in general and fewer acres of threatened or endangered species habitat. The difference between System A and System C would only be 196 acres.

Socioeconomic impacts on the Mojave proposal would not cause major problems. Permanent noise impact would be less on the System A route since five to six fewer permanent noise generating sources would be present. The System A route would require only one compressor station, five fewer than System B and six fewer than Systems C or D. All but two of these stations currently exist. Impacts to recreational facilities are similar for all systems.

Land use impacts would be similar along Systems A and B. System C would have three fewer areas of impacts. System D would have one less land use conflict than Systems A and B.

Impacts to cultural resources are difficult to determine prior to completion of a Class III cultural resources survey of the route. Based upon the current state of knowledge, the System A route has the potential to impact fewer sites than either the System B, C, or D routes and has the potential to impact fewer NRHP sites. The System A route has the same number of high sensitivity segments as System C but fewer than either Systems B or D.

Finally, impacts to paleontology would be less severe along the System C route.

Based on all of the data presented above, the System C route would cause fewer significant impacts to geology, soils, surface water, groundwater, vegetation, portions of wildlife, socio-economics, land use, and paleontology. The System C route is definitely the overall superior route concerning environmental impacts.

Also using the data presented above, the System D route represents the least favorable route from an environmental perspective. It has the highest impact to geology, surface water, wildlife, socioeconomics, land use, cultural resources, and paleontology. The System A and B routes impacts generally fall between the System C and D routes.

1.3 EL DORADO ALTERNATIVE

The El Dorado Interstate Transmission Company proposed to construct an interstate natural gas pipeline into Kern County, California, from Mohave County, Arizona. [1/] The El Dorado system would be approximately 381 miles long. Four components make up the El Dorado system. The North Receipt Lateral in Mohave County would consist of approximately 16.5 miles of new pipeline. The mainline would consist of approximately 256 miles of new pipeline. The East Delivery Lateral would consist of 36 miles of new pipeline, and the West Delivery Lateral would consist of 72.5 miles of new pipeline in the San Joaquin Valley of California.

As with the Mojave proposal (Section 1.2), the El Dorado Interstate Transmission Company must obtain gas from outside sources. The same two natural gas transmission companies which plan to supply gas to Mojave could also supply gas to El Dorado. Although El Dorado proposes to deliver only 520 MMcfd of natural gas to the EOR/cogen market, the systems that follow will be capable of delivering 720 or 600 MMcfd of gas to El Dorado in the same way they could deliver to Mojave. As with the Mojave proposal, utilization of the Northwest, El Paso, and Transwestern systems resulted in four major ways of delivering natural gas to the start point of the El Dorado system. These four systems and the three El Dorado route variations will be outlined below. This will be followed by a discussion of the major impacts for each system. Finally, the best system or systems will be selected. Table 1.3-1 compares the impacts of El Dorado and its alternatives.

1.3.1 El Dorado System A: El Dorado, El Paso 400 MMcfd Case, and Transwestern

This system would entail approximately 752 miles of pipeline broken down into three components. The 381 miles of new pipeline needed for the El Dorado would be supplied with natural gas in exactly the same manner as the Mojave proposal (see Section

---

[1/] On October 27, 1986, Administrative Law Judge Isaac D. Benkin of the FERC ordered that the El Dorado application be dismissed with prejudice. Actual dismissal was subject to the Commission's review. On October 14, 1987, the Commission adopted the initial decision of the Administrative Law Judge, dismissed the El Dorado application, and terminated the dockets before FERC. One June 30, 1987, the California State Lands Commission denied, without prejudice, the El Dorado application. Due to the timing of this EIR/EIS, a decision was made to leave the information on El Dorado in the final EIR/EIS to allow the reader to judge El Dorado as an alternative to the two remaining companies in competition.

Table 1.3-1

EL DORADO SUMMARY OF IMPACTS

	EL DORADO SYSTEM				EL DORADO 1/ ROUTE			
	System A 2/	System B 3/	System C 4/	System D 5/	El Dorado	Alternative A	Alternative B	Alternative C
AIR QUALITY	NSI 6/	NSI	NSI	NSI	NSI	NSI	NSI	NSI
GEOLOGY								
Surface fault rupture	18	19	16	17	16	0 (0)	0 (0)	0 (0)
Miles of land-slide potential	27	43	80	179	0	0 (0)	0 (0)	0 (0)
Miles of slope greater than 30%	82	87	57	82	38	0 (3)	4 (5)	4 (8)
SOIL								
Acres of poor reclamation potential	4343	4489	3052	3632	2296	548 (457)	22 (64)	41 (73)
SURFACE WATER								
Number of stream crossings	68	71	61	120	28	3 (3)	3 (3)	1 (1)
Intermittent stream crossings	65	68	58	105	25	3 (3)	3 (3)	1 (1)
Perennial stream crossings	3	3	3	15	3	0 (0)	0 (0)	0 (0)
Moderate/high significance perennial stream crossings	0	0	0	9	0	0 (0)	0 (0)	0 (0)
GROUNDWATER								
Miles of potential impact	15	15	7	7	7	0 (0)	0 (0)	0 (0)
FRESHWATER BIOLOGY								
Number of sensitive stream crossings with fish present	0	0	0	0	0	0 (0)	0 (0)	0 (0)
TERRESTRIAL BIOLOGY								
Vegetation								
Total acres of native vegetation temporarily disturbed	8549	8599	6697	8604	4576	914 (885)	100 (121)	56 (109)
Acres of woody vegetation kept cleared for the life of the project	1838	1838	1797	1797	1608	457 (442)	44 (60)	31 (42)

Table 1.3-1 (continued)

EL DORADO SUMMARY OF IMPACTS

	EL DORADO SYSTEM				EL DORADO 1/ ROUTE			
	System A 2/	System B 3/	System C 4/	System D 5/	El Dorado	Alternative A	Alternative B	Alternative C
Vegetation (continued)								
Acres of riparian habitat crossed	24	24	24	34	22	0 (0)	0 (0)	0 (0)
Acres of federally threatened or endangered plant habitat affected	60	60	0	75	0	0 (0)	0 (0)	0 (0)
Number of species	1	1	0	2	0	0 (0)	0 (0)	0 (0)
Acres of California state listed plant habitat affected	947	947	947	947	947	0 (0)	0 (0)	73 (73)
Number of species	3	3	3	3	3	0 (0)	0 (0)	3 (3)
Acres of agricultural land temporarily disturbed	525	525	489	673	489	0 (0)	0 (0)	12 (0)
Wildlife								
Big game crucial or high priority habitat (acres)	748	748	564	1553	85	0 (0)	0 (0)	0 (0)
Big game migration corridors (acres)	121	121	121	121	121	0 (0)	0 (0)	0 (0)
Big game fawning/ calving areas (acres)	56	56	0	0	0	0 (0)	0 (0)	0 (0)
Upland game bird sensitive habitat (acres)	0	0	24	30	0	0 (0)	0 (0)	0 (0)
Waterfowl critical nesting areas (acres)	0	0	0	0	0	0 (0)	0 (0)	0 (0)
Raptor nesting areas (nests)	0	0	0	2	0	0 (0)	0 (0)	0 (0)
Acres of potential threatened or endangered animal habitat	8819	9119	8799	9717	7446	912 (885)	107 (121)	139 (121)

Table 1.3-1 (continued)

EL DORADO SUMMARY OF IMPACTS

	EL DORADO SYSTEM				EL DORADO 1/ ROUTE			
	System A 2/	System B 3/	System C 4/	System D 5/	El Dorado	Alternative A	Alternative B	Alternative C
Wildlife (continued)								
Yuma clapper rail	97	97	36	36	73	0 (0)	0 (0)	0 (0)
Bald eagle	169	169	115	127	145	0 (0)	0 (0)	0 (0)
Peregrine falcon	490	490	121	121	163	0 (0)	0 (0)	0 (0)
Whooping crane	0	0	0	0	0	0 (0)	0 (0)	0 (0)
California condor	1492	1492	1492	1492	1492	0 (0)	104 (121)	68 (109)
Desert tortoise	2756	2756	2998	2998	2683	912 (885)	0 (0)	0 (0)
Blunt-nosed leopard lizard	388	388	388	388	388	0 (0)	0 (0)	0 (0)
Tehachapi slender salamander	0	0	0	0	0	0 (0)	3 (0)	3 (0)
San Joaquin kit fox	410	410	410	410	410	0 (0)	0 (0)	68 (12)
Black-footed ferret	1345	1645	1567	2473	0	0 (0)	0 (0)	0 (0)
Mohave ground squirrel	667	667	667	667	667	0 (0)	0 (0)	0 (0)
Nelson's antelope squirrel	412	412	412	412	412	0 (0)	0 (0)	0 (0)
Tipton kangaroo rat	24	24	24	24	24	0 (0)	0 (0)	0 (0)
Short-nosed kangaroo rat	436	436	436	436	436	0 (0)	0 (0)	0 (0)
Giant kangaroo rat	133	133	133	133	133	0 (0)	0 (0)	0 (0)
SOCIOECONOMICS								
Population change greater than 10%	No	No	No	No	No	No	No	No
Total employment change > 10%	No	No	No	No	No	No	No	No
Income change >10%	No	No	No	No	No	No	No	No

Table 1.3-1 (continued)

EL DORADO SUMMARY OF IMPACTS

	EL DORADO SYSTEM				EL DORADO 1/ ROUTE			
	System A 2/	System B 3/	System C 4/	System D 5/	El Dorado	Alternative A	Alternative B	Alternative C
SOCIOECONOMICS (continued)								
Vacancy rates of temporary housing less than 5%	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Local tax base change > 10%	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Traffic	NSI	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Operational noise	NSI	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Recreation (conflicts)	2	2	2	2	2	0 (0)	0 (0)	0 (0)
LAND USE/OWNERSHIP								
Number of conflicts	6	6	3	5	5	0 (1)	1 (0)	0 (0)
CULTURAL RESOURCES								
Number of sites in direct impact zone	86	94	95	230	45	2 (5)	0 (2)	2 (1)
NRHP listed or eligible sites in the direct impact zone	2	2	2	6	2	0 (0)	0 (0)	0 (0)
Percentage of line actually surveyed	12	13	15	27	16	0 (0)	2 (2)	71 (0)
High sensitivity Segments	9	10	9	14	4	1 (0)	0 (0)	0 (0)
PALEONTOLOGIC RESOURCES								
Acres of impact to significant formations	2935	2993	2454	3309	1670	7 (65)	0 (0)	0 (0)
VISUAL RESOURCES								
Acres of high visual impact	318	318	318	318	318	0 (318)	0 (0)	0 (0)

1/ The first entry for each resource area under alternative routing represents the value for the alternative segment only; the value in parenthesis represents the comparable quanity for the portion of the proposed route which would be avoided by using this alternative.
2/ El Dorado System A: El Dorado, El Paso 400 MMcfd Case, and Transwestern
3/ El Dorado System B: El Dorado, El Paso 400 MMcfd Alternative (100/300 Case), Northwest 100 MMcfd Case, and Transwestern
4/ El Dorado System C: El Dorado, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case
5/ El Dorado System D: El Dorado, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case
6/ NSI = No Significant Impact

1.2.1). As with the Mojave proposal, System A could supply up to 720 MMcfd of natural gas to the El Dorado Interstate Transmission Company at Topock, Arizona. Since the El Dorado application has stated that El Dorado would deliver only 520 MMcfd of natural gas to the EOR/cogen market, a surplus capacity of 200 MMcfd would be available.

The action would not significantly affect air quality along the route in either construction or operation. Construc-tion impacts to air quality would represent a temporary source of both dust and engine emissions. Positive air quality effects would take place in Kern County as a result of implementation.

The route would encounter at least 18 Quaternary surface faults. The potential for surface fault rupture would be greatest in the western portions of the El Dorado route. Pipeline design should be sufficient to withstand surface fault ruptures.

The pipeline route would contain approximately 27 miles of potential landslide areas. The potential landslide areas would occur along the El Paso and Transwestern routes. In addition to the potential landslide areas, 82 miles of the route would be constructed in areas with a slope greater than 30 percent. These areas are again concentrated along the Transwestern line with the remaining miles of slope hazard occurring in the Tehachapi Mountains portion of the El Dorado route.

Approximately 4,343 acres of the route would occur in areas with potential poor reclamation soils. These areas would occur primarily along the El Dorado and Transwestern lines. The limiting factor on soil reclamation potential, a lack of precip-itation, would inhibit revegetation efforts.

The route would cross 68 intermittent and perennial streams. Three perennial stream crossings would be necessary.

Potential impacts to groundwater could occur along approximately 15 miles of the proposed route. This is 15 miles less than Mojave Systems A and B. Because the El Dorado proposed route is higher and farther from the river and adjacent agricultural lands than the Mojave proposal and Mojave Alternative B in the vicinity of the Mojave River the potential for impact would be less. It is unlikely that impacts to groundwater would be significant if the proper mitigation measures were implemented during construction.

The El Dorado System A would have no impacts to freshwater biology since none of the stream crossings discussed in surface water has a potential to contain sensitive aquatic species.

This alternative would temporarily disturb 8,549 acres of native vegetation. None of the proposed route would cross unique or extremely sensitive vegetation types except for Joshua trees and cactus which are scattered in the creosote bush and saltbush

vegetation types. The route would keep 1,838 acres of woody vegetation, primarily creosote bush, cleared from the operational ROW for the life of the project. Construction of the route would impact approximately 24 acres of riparian vegetation. These areas, however, should recover quickly.

The route has the potential to impact the habitat of one federally threatened plant species. This would represent approximately 60 acres of federally listed plant species habitat located along the Transwestern line. Three California state listed plant species would be impacted. These plants could occur along 947 acres of the El Dorado route.

The route would also temporarily disturb 525 acres of agricultural land, primarily along the El Dorado route. These impacts would not last beyond one agricultural season. The route would also permanently remove 273 acres of orchards and vineyards from production.

The El Dorado System A route would cross 748 acres of big game critical or high priority habitat, 121 acres of big game migration corridors, and 56 acres of big game fawning areas.

The route would impact 8,819 acres of wildlife habitat of species of special concern. Table 1.3-1 lists the acres of impacts for individual species. Significantly impacted species habitat (over 500 acres each) would include that for the California condor, desert tortoise, black-footed ferret, and Mohave ground squirrel.

The construction workforce would place a significant but temporary demand on housing and campgrounds in portions of Arizona, New Mexico and in San Bernardino County, California. These impacts would occur during the construction phase only. Property tax revenues would increase more than 10 percent in five counties crossed by the pipeline. Other positive although not significant impacts would occur in total employment and income changes.

The route would cause no significant impacts to traffic since all paved roads along the route would be crossed by boring beneath the pavement. Noise impacts caused by construction would be temporary and would generally occur during working hours. Since the majority of the proposed route is located in relatively uninhabited areas, noise resulting from construction should not present a problem.

The route could conflict with the operation of two recreation areas. These impacts would generally be temporary in nature but could produce significant impacts to the Stoddard Valley Recreation Use Area and to the Pacific Crest National Scenic Trail. The remaining impacts to recreation facilities would involve traffic delays and noise around parks, and increased usage of park facilities by construction workers. These impacts would cease following completion of construction.

The El Dorado System A route would conflict with the Havasu National Wildlife Refuge, BLM corridors (Yuma District), and with zoning regulations around the Golden Shores Subdivision along the North Receipt Lateral. There are also land use conflicts on Edwards Air Force Base similar to those discussed for Mojave. In addition, there is a potential for conflict with the proposed Mojave National Park immediately north of the proposed route.

Other potential land use conflicts could occur along Transwestern Loop G, part of which would not be in conformance with the Coconino National Forest Plan. This conflict could be easily resolved by keeping Loop G north of the existing line in the vicinity of the Fort Valley Experimental Forest.

The System A route contains nine 25-mile long segments which have a high cultural resources sensitivity rating. Compliance procedures should provide adequate mitigation to potentially significant impacts.

Approximately 2,935 acres of significant paleontological formations would be crossed by the route. Since this figure indicates potentially significant areas, it is difficult to determine the exact amount of significant areas. Implementation of the mitigation measures in the document would reduce, the potential impacts to paleontological resources to insignificance.

Approximately 318 acres of the route would cause potentially high visual impacts. These impacts would occur along portions of the route in the eastern Mojave Desert.

1.3.2 El Dorado System B: El Dorado, El Paso 400 MMcfd Alternative (100/300 Case), Northwest 100 MMcfd Case, and Transwestern

This four component system alternative would require construction of 775 miles of pipeline. The support facilities required to supply the El Dorado pipeline would be unchanged from those discussed for the Mojave System B (Section 1.2.2). This project could supply a maximum of 720 MMcfd of natural gas to the EOR/cogen market. This would leave a surplus of 200 MMcfd supply capacity at Topock.

This alternative action would not significantly affect air quality along the route in either construction or operation. Two new compressor stations would be required on the Northwest line with additions to the Green River and Ignacio Stations, as well as additional compression at the Bondad station on the El Paso line. These stations would meet all state and federal regulations.

The System B route would encounter at least 19 Quaternary surface faults, one more than the El Dorado System A route. Again, the potential for surface fault rupture would be greatest in the

western portions of the El Dorado line. The route would also contain approximately 43 miles of potential landslide areas, 16 more miles than for System A. This route would also have 87 miles of slopes greater than 30 percent, five more miles than the System B route.

Approximately 4,489 acres of this route would occur in areas with soils with a poor reclamation potential. This represents 146 more than the System A route.

The El Dorado System B route would cross 71 intermittent and perennial streams, three more than the System A route. Only three perennial streams would be crossed by this route, the same as the System A route.

Groundwater impacts could occur along 15 miles of the route, the same as the System A route. Again, all impacts to groundwater should be mitigatable. Like the System A route, this routing would have no significant impacts to freshwater biology resources.

This routing system would temporarily disturb 8,599 acres of native vegetation. This is 50 more than the System A route. The route would also keep 1,838 acres of woody vegetation permanently cleared from the operational ROW, unchanged from the System A route. The route would also cross 24 acres of riparian habitat, the same as the previously described route.

The route has the potential to impact one federally threatened plant species and its habitat, the same as System A. This would represent 60 acres of federally listed plant species habitat, unchanged from System A. This alternative would have the same number of California state listed plants and the same mileage impacts as those discussed for the System A route.

This route would also temporarily disturb 525 acres of agricultural land, the same as the System A route. The alternative would also permanently remove the same number of acres of orchards and vineyards from production as System A.

The alternative El Dorado System B route would cross 748 acres of big game critical/high priority habitat, 121 acres of big game migration corridors, and 56 acres of fawning areas. The impacts would be the same as would occur on the System A route.

The route would also impact 9,119 acres of habitat of wildlife species of special concern, 300 more than System A. Table 1.3-1 shows the comparisons of all wildlife species of special concern. Significantly impacted species habitat would include that for the California condor, desert tortoise, black-footed ferret, and Mohave ground squirrel.

The construction workforce would place a significant but temporary demand on housing and campgrounds in areas of Wyoming,

Arizona, New Mexico, and in San Bernardino County, California. Except for Wyoming and northwestern New Mexico, these would involve the same impacts as those identified under the System A proposal. Property tax revenues would increase more than 10 percent in five counties crossed by the pipeline.

The alternative route would cause no significant impacts to traffic. Noise impacts on this line would be similar to those discussed above; however, since two new compressor stations would be required along with additional compression at the Bondad station, the route would create more permanent noise.

The System B route would have similar impacts to recreation areas and land use as those discussed for System A.

The System B route contains ten 25-mile long segments having a high cultural resources sensitivity rating, one more than the System A route.

Approximately 2,993 acres of significant paleontological formations would be crossed by the route. This is 58 more than the System A route.

Approximately 318 acres of significant visually high impacts would occur along the route, the same as for System A route.

1.3.3 El Dorado System C: El Dorado, El Paso 600 MMcfd Alternative (100/500 Case), and Northwest 100 MMcfd Case

This three component system alternative would require construction of 587 miles of pipeline. The support facilities required to supply the El Dorado pipeline would be unchanged from those discussed for the Mojave System C route (Section 1.2.3). This project would supply a maximum of 600 MMcfd of natural gas to the EOR/cogen market. This would make available a surplus of 80 MMcfd at Topock over that proposed by El Dorado in its application.

Air quality impact related to construction would be more than the System A route and similar to the System B route. The two new compressor stations and additional compression at three other stations would meet all applicable state and federal air quality regulations. Air quality concerns, therefore, would be similar to System B.

This system routing would encounter at least 16 Quaternary surface faults, two less than either System A or B. This route would have 80 miles of potential landslide areas, 53 more miles than the System A and 37 more miles than for the System B route. Approximately 57 miles of the route would be built in areas with slopes greater than 30 percent. This is 25 fewer miles of potential impact than the System A route and 30 fewer than the System B route.

Soils with potentially poor reclamation would occur on 3,052 acres of the System C route. This is 1,291 fewer acres than the System A route and 1,437 fewer than the System B route.

The alternative route would cross 61 intermittent and perennial streams, seven fewer than the System A route and ten fewer than the System B route. Three perennial streams would be crossed by this route, the same as Systems A and B.

Potential impacts to groundwater could occur along seven miles of the route, eight fewer miles than the System A and B routes. Like the System A and B routes, freshwater biology resources would not be significantly impacted by the route.

The System C route would temporarily disturb 6,697 acres of native vegetation. No portions of the route would affect unique or extremely sensitive vegetation types except for Joshua trees and cactus. This acreage figure is 1,852 and 1,902 fewer than would be impacted by either the System A or B routes respectively.

The alternative would keep 1,797 acres of woody vegetation permanently cleared from the operational ROW. This represents 41 fewer acres of permanent impact than the System A and B routes. Construction of the route would impact approximately 24 acres of riparian vegetation, the same as the System A and B routes.

This route would not impact any federally threatened or endangered plant species or plant species habitat. This is 60 fewer acres than the System A or B routes. The California state listed plant species and the number of miles of potential habitat for all three systems would remain the same.

This route would temporarily disturb 489 acres of agricultural land primarily along the El Dorado route. This is 36 fewer acres than either the System A or System B routes. The route would also permanently remove 273 acres of orchards and vineyards from production for the life of the project. This number remains unchanged from Systems A and B.

The alternative System C route would impact 564 acres of big game critical habitat, 184 fewer than either the System A or B routes. The impacts to big game migration corridors would be unchanged. No impacts to big game fawning areas would occur as opposed to 56 acres for either System A or B. Twenty-four acres of impacts to upland game bird sensitive habitat would occur as opposed to no impacts for either System A or B.

The alternative route would also impact 8,799 acres of wildlife habitat of species of special concern. This represents a decrease of 20 acres over the System A route and a 320 acre decrease from the System B route. Increases in acreage occur primarily with the desert tortoise habitat.

The construction workforce would place a significant but temporary demand on housing and campgrounds in areas of Wyoming, portions of Arizona and New Mexico, and San Bernardino County in California. These impacts would be essentially the same as either the System A or B routes, although impacts in Arizona and New Mexico may not be as severe since both El Paso and Transwestern workforces would not be in the area simultaneously. Property tax revenues would increase more than 10 percent in one county crossed by the pipeline.

Traffic and noise impacts would be similar to those discussed for System B. Recreational facilities impacts would be similar to those discussed for Systems A and B.

The alternative El Dorado System C route eliminates the land use conflicts with Golden Shores Subdivision, Havasu NWR, and BLM corridors in the Yuma District.

Portions of the westernmost 4.2 miles of the Flagstaff Loop would be in conflict with the Elden Environmental Study Area located within the Coconino National Forest. The conflicts associated with the Transwestern line concerning the Coconino National Forest Plan would be eliminated. The remainder of the land use problems would be the same as those discussed for the System A and B routes.

The System C route contains nine 25-mile long segments with a high cultural resources sensitivity rating, one less sensitive segment than System B and the same number as System A.

This route has the potential to impact 2,454 acres of significant paleontological formations. This is 481 and 539 fewer acres than the System A and B routes, respectively.

Visual impacts for the System C route remain unchanged from either the System A or B routes.

1.3.4 El Dorado System D: El Dorado, El Paso 600 MMcfd Alternative (200/400 Case), and Northwest 200 MMcfd Case

This three component system alternative would require construction of 751 miles of pipeline. The support facilities required to supply the El Dorado pipeline would be unchanged from those discussed for the Mojave System D route (Section 1.2.4). This project would supply a maximum of 600 MMcfd of natural gas to the EOR/cogen market. This would make available a surplus of 80 MMcfd at Topock over that proposed by El Dorado in its application.

This alternative would not significantly affect air quality along the route for either construction or operation. The two new compressor stations and the additional compression at four other stations would meet all applicable state and federal air quality

regulations. Air quality concerns, therefore, would remain unchanged from either Systems A, B, or C.

This system routing would encounter at least 17 Quaternary surface faults, one more than System C, one less than System A, and two fewer than System B. This route would have 179 miles of potential landslide areas, 152 more miles than the System A route, 136 miles more than the System B route and 99 more miles than the System C route. Approximately 82 miles of the route would be built in areas with slopes greater than 30 percent. This is the same as for the System A route, five fewer miles than the System B route, and 25 more miles than the System C route.

Soils with potentially poor reclamation would occur on 3,632 acres of the System D route. This is 711 and 857 fewer than the System A and B routes, respectively. It also represents 580 more acres of disturbance than would occur on the System C route.

The route would cross 120 intermittent and perennial streams, 52, 49, and 59 more than the System A, B, and C routes, respectively. Fifteen perennial streams would be crossed by this route, twelve more than the other three systems. Nine highly significant perennial stream crossings would occur on the System D route as opposed to no sensitive stream crossings on any of the other El Dorado system routes.

Potential impacts to groundwater could occur along seven miles of the route, eight fewer miles than either the System A or B routes and the same number of miles as the System C route. Like the System A, B, and C routes, freshwater biology resources would not be significantly impacted by the route.

The System D route would temporarily disturb 8,604 acres of native vegetation. No portions of the route would affect unique or extremely sensitive vegetation types except for Joshua trees and cactus. This acreage is 55, 5, and 1,907 more than would be impacted by either the System A, B, or C routes, respectively.

The routing would keep 1,797 acres of woody vegetation permanently cleared from the operational ROW. This represents 41 fewer acres of permanent impact than the System A or B routes, and the same number of acres of disturbance as the System C route. Construction of the route would impact approximately 34 acres of riparian vegetation, ten more than any of the other systems.

This route could impact two federally threatened or endangered plant species or habitat. This is 75 more acres than the System C route and 15 more acres than either the System A or B routes. The California state listed plant species and the number of miles of potential habitat for all four systems would remain the same.

This route would temporarily disturb 673 acres of agricultural land primarily along the El Dorado route. This is 148 more acres

than either the System A or B routes and 184 acres more than the System C route. Impacts to orchards and vineyards would remain unchanged.

The alternative System D route would impact 1,553 acres of big game critical habitat, 805 more than either the System A or B routes and 989 more than the System C route. The impacts to big game migration corridors would be unchanged. There would be no impacts to fawning areas, 56 acres less than for System A or B and the same as for System C. Impacts to upland game bird sensitive habitat could occur to 30 acres, 30 more than were identified for System A or B and six more than were identified for System C. The System D route would also impact two raptor nests, two more than any of the previous systems.

The alternative route would also impact 9,717 acres of wildlife habitat of species of special concern. This represents an increase of 898 acres over the System A route, an increase of 598 acres of System D, and an increase of 918 over the System C route. Increases in acreage occur primarily in desert tortoise and black-footed ferret habitat.

The construction workforce of System D would place a significant but temporary demand on housing and campgrounds in areas of Wyoming, Utah, Arizona, New Mexico and San Bernardino County in California. These impacts would be essentially the same as those discussed above, but since the workforce in Arizona would only be from El Paso rather than El Paso and Transwestern, the impacts would not be as severe as for Systems A or B. Property tax revenues would increase more than 10 percent in four counties crossed by the pipeline.

Traffic and noise impacts would remain essentially unchanged from those discussed for System C. Impacts to recreational facilities would remain essentially unchanged from those discussed for System B.

The El Dorado System D route would have the land use impacts discussed for System C. In addition, land use conflicts along the route include the problems associated with commercial and residential development along the Moab Loop and the proximity of the Cisco Loop to the Lost Springs WSA, on the Northwestern loops.

System D contains three 25-mile long segments with a very high cultural resources sensitivity and eleven 25-mile long segments with a high sensitivity rating. These sensitivity ratings are much higher than any of the other system routes.

This route has the potential to impact 3,309 acres of significant paleontological formations. This is 374, 316, and 855 more than the System A, B, and C routes, respectively.

Visual impacts for the System D route would be of concern at Arches National Park and Lost Springs WSA in addition to the area identified for Systems A, B, and C.

1.3.5 El Dorado Alternative A

Alternative A would replace 73 miles of the El Dorado mainline between MP 37 and 110 in the eastern Mojave Desert. The Alternative A route is 2.4 miles longer than the proposed route and is similar to the Mojave mainline route.

Impacts to air quality, surface water, and freshwater biology would remain unchanged from the El Dorado proposed route.

The Alternative A route would have the same geological impact as the primary route except in the category of slope greater than 30 percent. The portion of the mainline route replaced by Alternative A has three miles of slope greater than 30 percent while the Alternative A route has no mileage in this category.

Alternative A would have 548 acres of impacts to soils with a poor reclamation potential compared with 457 acres for the portion of the mainline it would replace.

Alternative A would have no potential for impact to groundwater, the same as the portion of the route it would replace.

The El Dorado Alternative A route would increase impacts to total areas of native vegetation temporarily disturbed by 29. It would also increase impacts to acres of woody vegetation kept cleared for the life of the project by 15.

Neither the alternative nor the portion of the main route which would be avoided has the potential to affect riparian habitat, federally threatened or endangered plant species and the number of California state listed plant species or their habitat, agricultural land, big game critical habitat, big game migration corridors, upland game bird sensitive habitat, or raptor nesting.

The Alternative A route would have 27 more acres of impacts to wildlife habitats of species of special concern. This increase occurs within the habitat of the desert tortoise.

Socioeconomic, traffic, noise, and recreation impacts along the Alternative A route would be similar to those discussed for the proposed mainline.

The El Dorado Alternative A route would avoid the one potential land use conflict present in the primary routing, the proposed Mojave National Park immediately north of the proposed route.

The Alternative A route would not differ in the number of NRHP properties or in the amount of survey coverage. It has one

Visual impacts for the System B route would be of concern at Afton Canyon and Lost Springs VRA in addition to the area identified for systems A, B, and C.

1.3.5 El Dorado Alternative A

Alternative A would replace 77 miles of the El Dorado mainline between MP 37 and 110 in the eastern Mojave Desert. The Alternative A route is 2.4 miles longer than the proposed route and is similar to the Mojave mainline route.

Impacts to air quality, surface water, and freshwater biology would remain unchanged from the El Dorado proposed route.

The Alternative A route would have the same geological impact as the primary route except in the category of slope greater than 30 percent. The portion of the mainline route replaced by Alternative A has three miles of slope greater than 30 percent while the Alternative A route has no miles in this category.

Alternative A would have 848 acres of impacts to soils with a poor reclamation potential compared with 437 acres for the portion of the mainline it would replace.

Alternative A would have no potential for impact to groundwater, the same as the portion of the route it would replace.

The El Dorado Alternative A route would increase impacts to total areas of native vegetation temporarily disturbed by 39%. It would also increase impacts to acres of woody vegetation kept cleared for the life of the project by 13%.

Neither the alternative nor the portion of the main route which would be avoided has the potential to affect riparian habitat, federally threatened or endangered plant species and the number of California state listed plant species or their habitat, agricultural land, big game critical habitat, big game migration corridors, upland game bird sensitive habitat, or raptor nesting.

The Alternative A route would have 37 more acres of impacts to wildlife habitats of species of special concern. This increase occurs within the habitat of the desert tortoise.

Socioeconomic, traffic, noise, and recreation impacts along the Alternative A route would be similar to those discussed for the proposed mainline.

The El Dorado Alternative A route would avoid the one potential land use conflict present in the primary routing, the proposed Mojave National Park immediately north of the proposed route.

The Alternative A route would not differ in the number of NRHP properties or in the amount of survey coverage. It has one

segment with high sensitivity whereas the portion of the mainline it would replace has none. The Alternative has fewer sites in the direct impact zone.

The Alternative A route would contain 58 fewer acres of significant paleontological formations.

No visual impacts would be present on the Alternative A route, 318 fewer acres than on the portion of the mainline it would replace.

1.3.6 El Dorado Alternative B

Alternative B would replace 10 miles of the El Dorado mainline between MP 240 and 250. The Alternative B route is almost two miles shorter than the main route.

Impacts to air quality, surface water, groundwater, freshwater biology, socioeconomics, paleontology, and visual resources would remain unchanged from the El Dorado main route.

Impacts caused by surface fault rupture and landslide potential would remain unchanged; however, one less mile of slope greater than 30 percent would be present along the Alternative B route than would occur along the primary route.

Alternative B would impact 22 acres of soils with poor reclamation potential as opposed to 64 acres along the primary route.

The El Dorado Alternative B route would have 21 fewer acres of impacts to native vegetation than the main route and 16 fewer acres of impacts to woody vegetation permanently removed from the operational ROW.

Neither Alternative B nor the portion of the primary route avoided would have an effect on riparian habitat, federal and California state listed threatened or endangered plant species or their habitat, agricultural lands, or general wildlife (see Table 1.3-1). The alternative would have 20 fewer acres of impacts to California condor habitat and three acres more impact to Tehachapi slender salamander habitat, both species of special concern.

The El Dorado Alternative B route would have one additional land use conflict which was not present in the primary route. The Alternative B route would cause impacts to the Bear Valley Springs community, particularly to the existing residential area and to future development.

The Alternative B route contains no known cultural resource sites, two fewer than the portion of the mainline it would replace. No NRHP properties would be affected by either of the

routes. Survey coverage for both routes is roughly equivalent and no high sensitivity segments are present.

1.3.7 El Dorado Alternative C

Alternative C would depart from the mainline route at approximately MP 247 at the western end of the Cummings Valley. It would traverse mountain valleys and ridges, descend the Tehachapi Mountains, and rejoin the proposed mainline at MP 256. The Alternative C route is approximately 3.3 miles shorter than the proposed route.

Impacts to air quality, surface water, groundwater, freshwater biology, socioeconomics, land use, paleontology, and visual resources would remain unchanged from the primary route.

Impacts along the Alternative C route with regard to surface fault rupture and landslide potentials would remain unchanged from the primary route. Alternative C, however, does have four fewer miles of slopes greater than 30 percent than the portion of the mainline it would replace.

Alternative C would impact 41 acres of soils with poor reclamation potential, 32 fewer than the portion of the mainline it would replace.

This routing alternative would impact 53 fewer acres of native vegetation and 11 fewer acres of permanently cleared woody vegetation than on the portion of the mainline it would replace.

Acres of riparian habitat crossed and the numbers and associated habitat of federally threatened or endangered plants would remain unchanged from the main route. California state listed plant species would also remain unchanged. Impacts to agricultural lands would increase by 12 acres when compared to the portion of the mainline it would replace.

The Alternative C route would have no changes in the amount of impacts caused to general wildlife species. The route would impact 41 fewer acres of California condor habitat; however, there is an increase of 56 acres in San Joaquin kit fox habitat and a three acre increase in Tehachapi slender salamander habitat.

One more cultural resource site would be encountered on Alternative C than would occur on the primary route. Alternative C, however, has been surveyed at the 71.4 percent level, much higher than the proposed route. No NRHP properties have been identified on either route and no high sensitivity rating segments are present.

1.3.8 The El Dorado Alternative Best Case

Based on the above discussion, the route with the least environmental impact is the El Dorado previously proposed route. Differences between the primary route, Alternative A and Alternative C are so minor that no preference need be assigned. On the other hand Alternative B would unnecessarily affect established development in Bear Valley Springs with no substantial offsetting gains.

The selection of the best system to supply El Dorado is based on precisely the same factors used for Mojave since the supplying projects are identical. Consequently the El Dorado System C would be preferable to the other systems.

1.4 KERN RIVER PROPOSED ACTION

Kern River Gas Transmission Company (Kern River) proposes to construct, own, and operate an interstate natural gas transmission pipeline from Opal, Wyoming, to Kern County, California. The proposed Kern River system would be approximately 831 miles long. Three components make up the Kern River system: the 756-mile long mainline and the Kern River (27 miles) and Taft (48 miles) Laterals.

Kern River proposes to provide the capacity to transport up to 700 MMcfd of natural gas from two major existing sources: the Overthrust Belt gas fields in southwest Wyoming and northeast Utah, and the western Canadian gas fields. Canadian gas would be received at the border and transported through the existing Northwest system from Sumas, Washington, to southwest Wyoming where it would be delivered to Kern River near Opal. No new facilities would be required by Northwest to transport this gas. Overthrust gas would be collected from fields adjacent to Kern River's proposed mainline.

In addition to Kern River's proposed route, six variations are examined in this document. The Kern River Proposal and the variations are outlined below with the major impacts discussed. Table 1.4-1 compares impacts associated with the Kern River proposal and its alternatives.

1.4.1 Kern River Proposal

The Kern River system would interconnect with Northwest's interstate transmission system near Opal, Wyoming, traverse 15 counties in four states, and terminate in the Bakersfield, California, area. Three compressor stations providing a total of 35,500 hp would be constructed as part of the project. The

Table 1.4-1

KERN RIVER SUMMARY OF IMPACTS 1/

	Kern River Proposed	Wasatch Variation	West Strawberry Variation	Salt Creek Canyon Variation	North Las Vegas Variation	Henderson Variation	North Bakersfield Variation
AIR QUALITY	NSI 2/	NSI	NSI	NSI	NSI	NSI	NSI
GEOLOGY							
Surface fault rupture	23	2 (1)	0 (0)	1 (1)	1 (2)	0 (0)	4 (6)
Miles of landslide potential	163	33 (66)	12 (38)	4 (8)	0 (0)	0 (0)	10 (2)
Miles of slope greater than 30%	229	44 (61)	23 (42)	0 (6)	8 (5)	0 (0)	29 (10)
SOIL							
Acres of poor reclamation potential	4882	703 (1570)	218 (812)	60 (60)	1236 (927)	170 (121)	242 (160)
SURFACE WATER							
Number of stream crossings	135	46 (40)	20 (20)	1 (7)	13 (11)	15 (2)	21 (11)
Intermittent stream crossings	83	30 (10)	4 (2)	0 (4)	12 (9)	15 (2)	20 (10)
Perennial stream crossings	52	16 (30)	16 (18)	1 (3)	1 (2)	0 (0)	1 (1)
Moderate/high significance perennial stream crossings	39	12 (24)	11 (15)	0 (3)	0 (0)	0 (0)	0 (0)
GROUNDWATER							
Miles of potential impact	10	4 (2)	(10) (0)	0 (1)	0 (1)	1 (1)	0 (0)
FRESHWATER BIOLOGY							
Number of sensitive stream crossings with fish present	13	6 (12)	1 (5)	1 (2)	0 (0)	0 (0)	0 (0)
TERRESTRIAL BIOLOGY							
Vegetation							
Total acres of native vegetation temporarily disturbed	8646	855 (1438)	756 (691)	25 (116)	1320 (1162)	190 (141)	1000 (654)
Acres of woody vegetation kept cleared for the life of the project	2920	290 (612)	285 (295)	12 (45)	665 (544)	95 (24)	210 (98)
Acres of riparian habitat crossed	98	125 (61)	105 (25)	0 (0)	10 (24)	0 (0)	10 (13)

Table 1.4-1 (continued)
KERN RIVER SUMMARY OF IMPACTS 1/

	Kern River Proposed	Wasatch Variation	West Strawberry Variation	Salt Creek Canyon Variation	North Las Vegas Variation	Henderson Variation	North Bakersfield Variation
Vegetation (continued)							
Acres of federally threatened or endangered plant habitat affected	0	0 (0)	1 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Number of species	0	0 (0)	1 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Acres of California classified plant species affected	536	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	82 (41)
Number of species	4	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	1 (1)
Acres of agricultural land temporarily disturbed	1561	425 (138)	24 (24)	145 (78)	0 (2)	0 (0)	350 (353)
Wildlife							
Big game crucial or high priority habitat (acres)	1350	493 (688)	282 (397)	12 (75)	0 (0)	0 (0)	0 (0)
Big game migration corridor (acres)	162	0 (77)	0 (0)	0 (0)	0 (37)	0 (0)	0 (0)
Big game fawning/calving area (acres)	0	0 (0)	50 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Upland game bird sensitive habitat (acres)	404	24 (0)	164 (40)	0 (0)	0 (0)	0 (0)	0 (0)
Waterfowl critical nesting areas (acres)	60	22 (36)	0 (0)	0 (36)	0 (0)	0 (0)	0 (0)
Raptor nesting areas (nests)	12	7 (4)	5 (4)	2 (0)	0 (0)	0 (0)	0 (0)
Acres of potential threatened or endangered animal habitat	8404	65 (18)	0 (0)	12 (0)	424 (454)	0 (0)	3293 (2607)
Yuma clapper rail	0	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Bald eagle	121	65 (18)	0 (0)	12 (0)	0 (0)	0 (0)	0 (0)
Peregrine falcon	0	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Whooping crane	0	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
California condor	1560	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	1680 (1141)

Table 1.4-1 (continued)

KERN RIVER SUMMARY OF IMPACTS 1/

	Kern River Proposed	Wasatch Variation	West Strawberry Variation	Salt Creek Canyon Variation	North Las Vegas Variation	Henderson Variation	North Bakersfield Variation
Wildlife (continued)							
Blunt-nosed leopard lizard	339	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	217 (279)
Tehachapi slender salamander	3	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	9 (3)
Desert tortoise	3716	0 (0)	0 (0)	0 (0)	424 (303)	0 (0)	0 (0)
San Joaquin kit fox	333	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	424 (403)
Black-footed ferret	600	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Utah prairie dog	0	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Mohave ground squirrel	751	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Nelson's antelope squirrel	290	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	292 (290)
Tipton kangaroo rat	24	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	12 (24)
Short-nosed kangaroo rat	290	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	424 (290)
Giant kangaroo rat	177	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	235 (177)
SOCIOECONOMICS							
Population change >10%	No	No	No	No	No	No	No
Total employment change >10%	No	No	No	No	No	No	No
Income change >10%	No	No	No	No	No	No	No
Vacancy rates of temporary housing <5%	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Local tax base change >10%	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Traffic	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Operational noise	NSI	NSI	NSI	NSI	NSI	NSI	NSI
Recreation (conflicts)	6	2 (1)	1 (1)	0 (0)	1 (3)	0 (0)	0 (0)

Table 1.4-1 (continued)

KERN RIVER SUMMARY OF IMPACTS 1/

	Kern River Proposed	Wasatch Variation	West Strawberry Variation	Salt Creek Canyon Variation	North Las Vegas Variation	Henderson Variation	North Bakersfield Variation
LAND USE/OWNERSHIP							
Number of conflicts	5	2 (1)	2 (1)	0 (0)	0 (4)	0 (1)	0 (0)
CULTURAL RESOURCES							
Number of sites in the direct impact zone	77	5 (2)	1 (2)	0 (0)	6 (5)	0 (0)	4 (5)
NRHP listed or eligible sites in the direct impact zone	4	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Percentage of line actually surveyed	5	1 (1)	0 (0)	0 (0)	17 (12)	9 (11)	8 (7)
High sensitivity segments	9	0 (0)	0 (0)	1 (0)	1 (0)	0 (0)	0 (1)
PALEONTOLOGIC RESOURCES							
Acres of impact to significant formations	6119	1716 (776)	602 (447)	0 (0)	1305 (1124)	185 (194)	556 (45)
VISUAL RESOURCES							
Acres of high visual impact	524	28 (186)	257 (114)	0 (0)	0 (76)	0 (0)	0 (0)

1/ The first entry for each resource under route variations represents the value for the variation segment only; the value in parenthesis represents the comparable quanity for the portion of the proposed route which would be avoided by using this variation.

2/ NSI = No Significant Impact

route would follow existing utility and transportation corridors for approximately 54 percent of its length.

The proposed action would not significantly affect air quality along the route during either construction or operation. Construction impacts to air quality would represent a temporary source of both dust and engine emissions. Operation of the three new compressor stations located in Wyoming, Utah, and Nevada would meet all applicable state and federal regulations. Air quality changes in Kern County resulting from project implementation would be positive.

The proposed route would encounter at least 23 Quaternary surface faults. The potential for surface fault ruptures would be greatest in the western portions of the route in California and the central Utah portion of the route. Pipeline design criteria would adequately mitigate potential hazards due to surface fault ruptures.

The pipeline route would cross approximately 163 miles of potential landslide areas. The majority of the potential landslide areas would occur between MP 78 and 186. In addition to the miles of landslide potential, 229 miles of the route would be constructed in areas with a slope greater than 30 percent. These areas are again concentrated along the mountainous portions of the Kern River route in north-central Utah and the Tehachapi Mountains portion of the route in southern California.

The proposed route would cross approximately 4,882 acres of land in areas with soils having poor reclamation potential. These areas are located primarily in the Mojave Desert geographic region in California (MP 535 to 713), although impacts in the Middle Rocky Mountains (MP 70 to 185) and Basin and Range (MP 185 to 535) areas of Utah and Nevada would also be significant. Implementation of erosion control, restoration, and revegetation guidelines would help to stabilize many of the areas. The Mojave Desert region, due to low rainfall, may take many years before vegetation would be adequately recovered. Similar problems with revegetation may occur in the Middle Rocky Mountains region primarily due to steep slopes, although well-designed erosion control plans should alleviate most of the problems.

The proposed route would cross 135 intermittent and perennial streams. A total of 52 perennial stream crossings would be necessary. Thirty-nine of these stream crossings would have moderate to high significance due to channel gradient, stream bed characteristics, and sideslope. Even if mitigation measures were applied, it is likely that some level of increased sediment loading would continue for a period after construction was completed. The largest number of these sensitive stream crossings would occur in the Middle Rocky Mountains region.

There would be approximately 10 miles of high and medium potential impacts to groundwater resources along the proposed route. These impacts would be distributed within the Wasatch and Tehachapi Mountains, Mojave River Valley, and Las Vegas Valley. It is unlikely that impacts to groundwater would be significant if the mitigation measures outlined are adhered to.

The Kern River proposed route would have significant impacts to 13 stream crossings in terms of freshwater biology. Principal impacts on aquatic environments would result from construction and include increased sedimentation, substrate removal, and habitat alteration. All of the sensitive stream crossings would occur in the Middle Rocky Mountains region between MP 44-185. Mitigation measures which reduce the amount of sediments introduced to the streams and avoid critical fish spawning times could greatly reduce the amount of overall impact.

The proposed route would temporarily disturb 8,646 acres of native vegetation and may impact the blackbrush scrub and the lowland saltbush scrub communities. The blackbrush scrub vegetation type represents a select community which may be impossible to revegetate to pre-construction conditions. In addition to these communities, Joshua trees and cactus which are scattered in the creosote and saltbush vegetation types may also be adversely affected. The proposed route would keep 2,920 acres of woody vegetation permanently cleared from the operational ROW. Due to the low revegetative potential along many portions of the proposed route, woody plant species may not reoccur for well over 50 years. Construction of the pipeline would also impact approximately 98 acres of riparian habitat.

The proposed route would impact no federally threatened or endangered plant species. However, four California state listed plant species could be impacted. This plant habitat occurs along 536 acres of the route.

In addition to the impacts to native vegetation, the proposed route would temporarily disturb 1,561 acres of agricultural land, primarily in the Basin and Range region and the San Joaquin Valley. These impacts would not last beyond one agricultural season. The route would also remove 242 acres of orchards and vineyards from production in the San Joaquin Valley for the life of the project.

The proposed route would significantly impact 1,350 acres of big game crucial or high priority habitat primarily between MP 0 and 390. The route would also affect 162 acres of big game migration corridors primarily in the Middle Rocky Mountains region. Approximately 404 acres of sensitive upland game bird habitat would be impacted by the proposed action particularly in the Basin and Range and Mojave Desert areas.

Sixty acres of crucial waterfowl nesting areas would be impacted in the Basin and Range area. A total of 12 known raptor nests along the route could be significantly affected.

In addition to impacts to wildlife, 8,404 acres of potential habitat of threatened or endangered wildlife species would be adversely affected including the California condor (1,560 acres), black-footed ferret (600 acres), Mohave ground squirrel (751 acres), and desert tortoise (3,716 acres). Table 1.4-1 lists habitat acreages suitable for other species of special concern which would be impacted.

The Kern River construction workforce would place a significant but temporary demand on housing and campgrounds in areas of central and southern Utah, southern Nevada, and San Bernardino County in California. This would inconvenience travelers and campers seeking accommodations if the construction period occurred during the tourist season. Property tax revenues would increase more than 10 percent in seven counties crossed by the pipeline. Positive although not significant changes in total employment and overall income would also occur as a result of construction.

The proposed route would have no significant impacts to traffic since major roads along the route would be crossed by boring beneath paved roads. Noise impacts caused by construction would be temporary in nature and would only occur during working hours. Since the majority of the proposed route would be constructed in relatively uninhabited areas, noise resulting from construction would not present a significant problem. Noise resulting from compressor station operation is expected to be below an Ldn of 55 dBA at nearby noise sensitive areas.

There is no vehicle access into most of the mainline route from MP 110 to 142. New roads would have to be approved by the Forest Service prior to construction. In several areas, new roads would cause unavoidable adverse impacts to soils, land stability, and other watershed values. The Forest Service may deny approval of new roads in these areas and specify helicopter supported construction.

The proposed route would conflict with the operation of six recreation areas. Most of these impacts would be temporary in nature. Construction activities could adversely affect competition for camping space in developed campgrounds in the Wasatch-Cache and Uinta National Forests, particularly if construction takes place between May and October. There would also be impacts to the Sunrise Mountain Natural Area, Rainbow Gardens, and the proposed Clark County Wetlands Park on the Las Vegas Wash during the construction period in the form of increased traffic, vegetation disturbance, water quality degradation, and disruption of the natural visual quality. While

most of these impacts are expected to be short-term, and in the instance of the Wetlands Park may occur prior to park development, visual disruption and the loss of any unique geologic/topographic feature within the ROW in the Rainbow Gardens area would be permanent. Finally, the Pacific Crest National Scenic Trail would experience temporary disturbance during construction in the form of interruption or delay of traffic, disturbance of vegetation and soils, and disruption of the natural visual quality.

The proposed action would conflict with the Utility Corridor Rule as presented in the Forest Land and Resource Management Plan for the Uinta National Forest. Construction along the proposed route would violate the intent of the plan in designating lands suitable for utility corridors. Another significant conflict would occur with the Sunrise Mountain Natural Area because BLM cannot issue a ROW grant for an activity which would permanently alter this area. Until this area (which is not recommended for Wilderness status) has been formally removed from the list, an unavoidable land use conflict would occur.

While direct construction impacts to the Rainbow Gardens area would be both short and potentially long-term, the longer term implications of facilitating access to the area are of substantial concern. Given the potential to accelerate degradation of the area, this impact is considered significant.

The proposed action is not in compliance with the Master Plan for the proposed Clark County Wetlands Park. The route would also conflict with land use plan for the city of Henderson, Nevada.

The Kern River route would encounter two 25-mile long segments with a very high cultural resources sensitivity rating and seven segments with a high sensitivity rating. Compliance procedures, however, should provide adequate mitigation to potential impacts.

Approximately 6,119 acres of significant paleontological formations would be crossed by the proposed route. Implementation of the mitigation measures in this document would reduce the potential impacts to paleontological resources to insignificance.

Approximately 524 acres of the route would have highly significant impacts to visual quality. The majority of these impacts would occur in the Uinta National Forest; the remainder are dispersed along the route.

1.4.2 Kern River Wasatch Variation

The Kern River route with the Wasatch Variation would entail construction of 854 miles of pipeline. The Wasatch Variation

would avoid crossing approximately 100 miles of rugged, mountainous terrain which would be traversed by the proposed route. It also avoids crossing the Uinta National Forest. The variation is approximately 154 miles in length versus 131 miles along the portion of the proposed route it would replace. The variation diverges from the proposed route at approximately MP 73 and would rejoin at MP 204.

Wasatch Variation impacts would be identical to those of the proposed route or insignificantly differ for the following resource areas: air quality; orchards and vineyards permanently removed; traffic and noise; number of high cultural resource sensitivity segments; federally threatened or endangered plant species; and California state listed plant species.

This variation would encounter the Wasatch Fault in a potentially more hazardous location than the proposed route. Also, an additional area of faulting (the West Valley Fault Zone) would be crossed by the Wasatch Variation. The variation would cross 33 miles of areas with potential landslide activity, as opposed to 66 miles for the portion of the route it would replace. The reduction in mileage of potential landslide activity that this variation offers would substantially improve the proposed action and was considered one of several key reasons for recommending its adoption.

The variation would also impact 44 miles of land containing slopes greater than 30 percent, compared to 61 miles along the portion of the route it replaces.

The Wasatch Variation would cross 703 acres of soils having poor reclamation potential, 867 fewer than the proposed portion of the route.

The Wasatch Variation would encounter 46 stream crossings, an increase of six over the portion of the mainline it would replace. This increase primarily occurs to intermittent stream crossings, where 20 additional crossings were encountered. Impacts to perennial streams would decrease to 16 from the 30 identified along the proposed route. Impacts to perennial streams with moderate to high significance also decreased to 12, 12 fewer than the proposed route portion. Although there would be a reduction in the number of streams impacted, the magnitude of unavoidable adverse impacts would be greatest in this variation because of municipal watersheds and adjacent urban populations. Nevertheless, the reduction in perennial stream crossings (and the concurrent improvement to freshwater biology discussed below) favors adoption of this variation.

Groundwater impacts along the Wasatch Variation would occur along four miles in the Wasatch Mountains, about two miles more than

the portion of the proposed route it would replace. This difference is not considered significant.

Impacts to freshwater biology with regard to the number of sensitive stream crossings containing fish would decrease by six to a total of six significant stream crossings if this variation were adopted.

Approximately 855 acres of native vegetation would be temporarily disturbed on the Wasatch Variation, 583 fewer than would be impacted by the proposed action. Further, the variation would permanently remove 290 acres of woody vegetation. This is 322 fewer than the proposed action.

This variation would potentially impact 125 acres of riparian habitat compared to 61 acres on the portion of the proposed route it would replace. This is a significant disadvantage. The variation would also temporarily disturb 425 acres of agricultural land, 287 more than the proposed route segment.

The variation would significantly impact 493 acres of big game critical or high priority habitat versus 688 along the proposed route. The variation would affect no big game migration corridors, as opposed to the 77 acres which would be impacted by the proposed route. Approximately 24 acres of upland game bird sensitive habitat would be affected by the variation. This is 24 more acres than the proposed action. Twenty-two acres of critical waterfowl nesting areas would be affected by the variation, 14 fewer than the proposed route. A total of seven known raptor nests would be impacted by the variation, three more than the proposed route.

Approximately 65 acres of potential habitat of federal threatened or endangered wildlife species would be affected by the variation. This is 47 more than the proposed route. These 65 acres would affect bald eagle winter concentration areas.

Impacts to socioeconomics would be similar to those discussed for the proposed action, although different counties in Utah would be involved. The four-mile portion of the Wasatch Variation within the Wasatch-Cache National Forest is inaccessible by vehicle. New roads would have to be approved by the Forest Service prior to construction. In several areas of steep rugged terrain, new roads would cause unavoidable adverse impacts to soils, land stability, and other watershed values. The Forest Service may deny approval of new roads in these areas and specify helicopter supported construction. Because these impacts could also occur along the replaced portion of the mainline in the Uinta Forest, the variation is favored.

Impacts to recreation facilities would be similar to the proposed action although impacts to campgrounds in the Uinta National

Forest would not occur. These areas would be replaced by impacts to the developed picnic area at Mueller Park. These impacts would be confined to the construction phase.

Use of the Wasatch Variation would resolve the major institutional problem which faced the Kern River proposal from the beginning, i.e., routing in a north-south direction across the Uinta National Forest. This problem is manifested in the Uinta's Standards and Guidelines for Utility Corridors (Standards and Guidelines). While adoption of the variation would resolve the conflict with the Uinta's Standards and Guidelines, it would create a similar conflict with the Standards and Guidelines for the Wasatch-Cache National Forest. While this may not appear as a significant improvement, the Wasatch-Cache Forest Service staff have expressed optimism and demonstrated a willingness to work with Kern River to resolve conflicts with its Standards and Guidelines, with the goal of defining a route across the Wasatch-Cache. Although the Uinta National Forest has worked with Kern River, it has also steadfastly maintained its position that a crossing of the Forest cannot be reconciled with its Standards and Guidelines. While the remaining land use conflicts associated with the proposed route would still be applicable, avoidance of the Uinta National Forest tremendously favors adoption of this variation.

This variation is essentially unroaded for about 33 miles between the crossing of I-80 and its descent into the Salt Lake Valley. On the Wasatch-Cache National Forest, new roads would have to be approved by the Forest Service prior to construction. In several areas on steep rugged terrain, new roads would cause unavoidable adverse impacts to soils, land stability, and other watershed values. The Forest Service may deny approval of new roads in these areas and specify helicopter construction.

No high sensitivity cultural resource segments are present in either the variation or the replaced portion of the route.

The variation has the potential to impact 1,716 acres of land containing significant paleontological formations. This is 940 more than the proposed route. While this is a disadvantage, it is considered minor because mitigation for this resource is typically highly successful.

The Wasatch Variation would have 28 acres of high significance impacts to visual resources as opposed to the 186 acres along the proposed route it would replace. This factor highly favors adoption of the variation.

1.4.3 Kern River West Strawberry Variation

The Kern River route with the West Strawberry Variation would involve construction of 838 miles of new pipeline. The West Strawberry Variation was identified as an alternative to construction in some of the same rugged terrain avoided by the Wasatch Variation. The variation would add about seven miles to the 57-mile long segment of the proposed route it replaces between MP 119 and 176.

West Strawberry Variation impacts would be identical to those of the proposed route or insignificantly different for the following resource areas: air quality; number of surface faults; overall number of stream crossings; acres of agricultural land temporarily disturbed; acres of big game migration corridors and waterfowl critical nesting areas; acres of threatened or endangered wildlife species habitat; socioeconomics, traffic, and noise; and the number of high sensitivity cultural resource segments.

The variation would cross 12 miles of area with significant landslide potential. This is 26 fewer miles than the portion of the route it would replace. Very significant landslide potential, however, exists along four miles of the West Strawberry Variation and stringent mitigation measures to prevent slides must be adhered to. The variation would also impact 23 miles of land containing slope greater than 30 percent. These areas are indicative of slope stability and revegetation problems. This is 19 fewer miles than the proposed route segment.

The variation would impact 218 acres of soils with a poor potential for reclamation. This would be 594 fewer of disturbance than the proposed Kern River route it would replace.

The number of intermittent stream crossings would increase by two over the proposed action. However, moderate to high significance stream crossings would decrease by four.

Groundwater impacts along the West Strawberry Variation would decrease about ten miles while the impact to the portion of the route it would replace would not be significant.

Impacts to freshwater biology with regard to the number of sensitive stream crossings would decrease by four, resulting in only one significant stream crossing. That stream contains a Class B fishery.

The variation would temporarily disturb 756 acres of native vegetation, 65 more than the proposed route. The variation, however, would impact 10 fewer acres of woody vegetation which would be permanently removed for the life of the project. The

variation would impact 285 acres versus the 295 for the proposed action. The variation would potentially impact 105 acres of riparian habitat as opposed to 25 along the proposed route. The West Strawberry Variation would potentially impact one federally listed endangered plant species as opposed to none on the proposed route segment. It would impact one acre of federally listed plant species habitat, one more acre than the proposed route.

The variation would significantly impact 282 acres of big game critical or high priority habitat versus the 397 along the proposed route. The West Strawberry Variation would impact 50 acres of big game fawning/calving areas and 164 acres of upland game bird sensitive habitat compared to 0 and 40 acres, respectively, associated with the proposed route. Five raptor nesting areas have been identified along the variation, one more than the portion of the proposed route it would replace.

Impacts to recreational facilities would be similar to those discussed for the proposed route. The recreation complex on the west side of Strawberry Reservoir would receive temporary impact during construction in the form of increased noise, traffic delays, and competition for camping space in the designated campground near the reservoir. Construction activities could also conflict with hunter usage.

The West Strawberry Variation would cause the same types of land use conflicts as were discussed for the proposed action. The variation itself is not within an existing utility corridor where it traverses the Uinta and Manti-LaSal National Forests and conflicts with rules for placement of utility corridors.

New roads on Forest Service lands would require approval by the Forest Service. In several areas on steep rugged terrain, new roads would cause unavoidable adverse impacts to soils, land stability, and other watershed values. The Forest Service may deny approval of new roads in these areas and specify helicopter supported construction.

The Kern River route with the West Strawberry Variation has the potential to impact 602 acres of land containing significant paleontological formations. This is 155 acres more than would be impacted in the proposed route.

The West Strawberry Variation has the potential to have 257 acres of significant visual impacts, 143 more than the portion of the route it would replace.

1.4.4 Kern River Salt Creek Canyon Variation

The Kern River route with the Salt Creek Canyon Variation would involve construction of 833 miles of pipeline. The variation was developed as a canyon/valley construction alternative to Kern River's proposed crossing of the northern tip of the San Pitch Mountains. The variation is 14 miles long versus 12 miles along the portion of the proposed route which it would replace. The variation is located between MP 180 and 192.

Salt Creek Canyon Variation impacts would be identical to those of the proposed route or insignificantly different for the following resource areas: air quality; number of surface faults; acres of poor reclamation potential soils; groundwater; acres of riparian habitat; acres of big game migration corridors and habitat for sensitive upland game birds; socioeconomics, traffic, noise and recreation; land use; cultural and paleontological resources; and visual resources.

The variation would cross four miles of land with significant landslide potential, compared with eight encountered on the proposed route. The variation would not impact any land containing slopes greater than 30 percent, which are indicative of slope stability and revegetation problems. This figure is six miles less than would occur along the proposed route.

Surface water impacts caused by crossing intermittent and perennial streams would occur once; six fewer than the proposed route segment. Two fewer perennial streams would be crossed and three fewer significant stream crossings would occur.

Impacts to freshwater biology with regard to the number of sensitive stream crossings would occur one time compared with two.

The Salt Creek Canyon Variation would temporarily disturb 25 acres of native vegetation, 91 fewer than the proposed action. The variation would also permanently remove 12 acres of woody vegetation from the operational ROW for the life of the project. This is 33 fewer than the proposed route. The variation would temporarily impact 145 acres of cropland, 67 more than the proposed route.

The Salt Creek Canyon Variation would significantly impact 12 acres of big game critical or high priority habitat versus 75 acres along the proposed route.

No critical nesting areas for waterfowl would be impacted by the variation as opposed to the 36 acres impacted by the portion of the replaced proposed route. Two raptor nesting areas were identified within the Salt Creek Canyon Variation, compared to none along the proposed route.

A bald eagle winter roost was identified within the Salt Creek Canyon Variation which accounts for the increase of 12 acres in threatened or endangered animal habitat.

The Salt Creek Canyon route would contain one 25-mile long segment with a high cultural resources sensitivity rating. Compliance procedures, however, should provide adequate mitigation to potential impacts.

1.4.5 Kern River North Las Vegas Variation

The Kern River route with the North Las Vegas Variation would involve 844 miles of pipeline construction. The variation was developed as an alternative to crossing the Sunrise Mountain Natural Area, Rainbow Gardens, and Las Vegas Wash. This variation utilizing the Goodsprings Spur would require 109 miles of pipeline compared to 96 miles from the corresponding segment of the proposed route. The variation would depart the proposed route at MP 438 and rejoin it at MP 534.

North Las Vegas Variation impacts would be identical to those of the proposed route or insignificantly different for the following resource areas: air quality; number of surface faults; plant species of special concern and their habitat; agricultural lands; big game critical habitat; upland game bird sensitive and waterfowl critical nesting habitat; number of raptor nests; freshwater biology; and socioeconomics, traffic, and noise.

The North Las Vegas Variation would cross eight miles of land with slope greater than 30 percent, three more than would occur along the proposed route.

The variation would impact 1,236 acres of soils with a poor potential for reclamation. This is 309 acres more than would occur along the proposed route and is directly attributable to the differences in mileage between the variation and the proposed route since reclamation potential in Nevada is generally poor.

Surface water impacts would increase by two with 13 stream crossings on the variation as opposed to eleven along the segment of the route it would replace. These additional crossings would occur on intermittent streams only.

The one mile of high potential groundwater impacts associated with the proposed route near Las Vegas Wash would be avoided.

The variation would temporarily disturb 1,320 acres of native vegetation, 158 more than would occur on the proposed route. One hundred twenty-one additional acres of woody vegetation would be disturbed on the North Las Vegas Variation and 14 fewer acres of riparian habitat would be impacted. Temporary impacts to

agricultural land would be similar to those discussed for the proposed action with two fewer acres disturbed.

No big game migration corridors would occur along the variation, compared with 37 acres of migration corridors along the proposed route section it would replace.

The variation could potentially impact 424 acres of habitat for federally threatened and endangered wildlife species, 121 more acres than the proposed action. These 121 more acres of impacts would occur to desert tortoise habitat.

Impacts to recreational facilities would be reduced compared to those discussed for the proposed action. While the variation would have both long and short-term impacts to Off-Road Vehicle Recreation Area 13 near Goodsprings, this impact would replace those associated with the Rainbow Gardens, Sunrise Mountain Natural Area, and the proposed Clark County Wetlands Park on the proposed route. This reduction in impact potential significantly favors adoption of the variation.

Utilization of the North Las Vegas Variation would avoid the land use conflicts associated with the Sunrise Mountain Natural Area, the proposed Clark County Wetlands Park, and the Henderson land use plan. As has been identified in Volume II, conflict with the Sunrise Mountain Natural Area is at present insurmountable. At the present time, Kern River could not, under any circumstances, legally construct across this area. The North Las Vegas Variation, however, could impact Nellis AFB. Use of the North Las Vegas Variation would also avoid Rainbow Gardens as well as avoid crossing the Las Vegas Wash. These factors again favor adoption of the variation.

The variation has one highly sensitive cultural resources segment as opposed to none for the proposed route.

The North Las Vegas Variation has the potential to impact 1,305 acres of significant paleontological formations. This is 181 acres more impact than would occur along the proposed route.

Impacts to visual resources would be reduced by 76 acres because this variation would avoid construction through the Rainbow Gardens and the Las Vegas Wash areas. This factor favors adoption of this variation.

1.4.6 Kern River Henderson Variation

The Kern River route with the Henderson Variation would require approximately 833 miles of new pipeline construction. The Henderson Variation was developed to minimize impacts to large areas of undeveloped, subdivided tracts within the corporate

limits of the City of Henderson, Nevada. The variation would parallel existing roads along its entire route. Total length of the variation is 15 miles, approximately two miles longer than the portion of the proposed route which it would replace. The variation would depart from the proposed route at MP 496 and rejoin it at MP 511.

Henderson Variations impacts would be identical to those of the proposed route or insignificantly different for the following resource areas: air quality; surface faults, miles of landslide potential, and miles of slope greater than 30 percent crossed; high significance perennial stream crossings; freshwater biology; riparian habitat; agricultural lands; all wildlife habitat criteria; socioeconomics, traffic and noise; cultural and paleontological resources; and visual resources.

This variation would impact 170 acres of soils with a poor reclamation potential. This is an increase of 49 acres of disturbance over the proposed route.

Groundwater impacts along the Henderson Variation would increase by 14 miles from the one mile of potential impact that it would replace along the proposed route.

No impacts to perennial streams would occur on the variation. Approximately 15 intermittent streams would be crossed, 13 more streams than the proposed action.

The variation would temporarily disturb 190 acres of native vegetation, 49 more acres than would be disturbed by the proposed route. Approximately 95 acres of woody vegetation would be permanently cleared from the operational ROW. This is 71 acres more disturbance to woody vegetation than would occur along the proposed route.

1.4.7 Kern River North Bakersfield Variation

The Kern River route with the North Bakersfield Variation would involve construction of 834 miles of new pipeline. The variation was developed in an attempt to substantially reduce pipeline mileage in the San Joaquin Valley. The total variation length would be 111 miles compared with the 108 miles for the corresponding portions of the proposed route. The variation would depart from the proposed route at MP 722, rejoin the route at the end of the Taft Lateral (MP 47.58) and continue along the Taft Lateral to MP 30T.

North Bakersfield Variation impacts would be identical to those of the proposed route or insignificantly different for the following resource areas: air quality; groundwater; high significance perennial stream crossings; freshwater biology;

number of California listed plant species; all wildlife habitat criteria except threatened or endangered species; socioeconomics, traffic and noise; and visual resources.

The variation would encounter at least four surface fault rupture areas, two less than would occur on the proposed route. The variation would encounter 10 miles of potential landslide areas, eight more miles than would occur on the proposed route. The variation, however, would encounter 29 miles with slope greater than 30 percent. This would be 19 more miles of potentially unstable slopes and areas with more difficult revegetation problems.

The variation would impact 242 acres of soils with poor reclamation potential, 82 more than would occur along the proposed route.

Surface water impacts would increase by ten over the proposed action. The ten additional stream crossings would be intermittent streams.

The variation would temporarily disturb 1,000 acres of native vegetation; this is 346 acres more disturbance than would occur on the proposed route. The variation would impact 210 acres of woody vegetation, 112 more than would occur on the proposed route. Impacts to riparian habitat would occur on ten acres compared to thirteen along the proposed route. The variation could impact one California state listed plant species with the potential to disturb 82 acres of habitat. This is an increase of 41 acres over the proposed route.

The variation could potentially impact 3,293 acres of habitat for federally threatened or endangered wildlife species. This is an 686-acre increase over the proposed route. These increases in potential habitat disturbed would occur to the California condor, Tehachapi slender salamander, San Joaquin kit fox, short-nosed kangaroo rat, and giant kangaroo rat. Table 1.4-1 lists the specific acreage impacts to each species of special concern.

No high sensitivity cultural resource segments would be encountered along the variation, while the portion of the route it replaces has one sensitive segment.

The variation would potentially impact 556 acres of significant paleontological formations. This would represent an increase of 511 acres over the proposed route.

1.4.8 The Kern River Proposal Best Case

In order to determine the environmentally preferred Kern River route, the variations were divided into three groups. These

groups, the Utah variations, the Nevada variations and the California variations are not comparable since they do not overlap. However, within each group the variations may be compared to determine the preferable route. The Kern River Proposal Best Case will then be the sum of the preferred variations within each group. The groups are defined as follows:

Utah Variations
- Kern River Proposal MP 73-204
  Wasatch Variation

- Kern River Proposal MP 119-176
  West Strawberry Variation

- Kern River Proposal MP 180-192
  Salt Creek Canyon Variation

Nevada Variations
- Kern River Proposal MP 438-534
  North Las Vegas Variation

- Kern River Proposal MP 496-511
  Henderson Variation

California Variations
- Kern River Proposal MP 722 to end of delivery laterals
  North Bakersfield Variation

1.4.8.1 The Utah Variations

This group of variations will be compared in the following manner. The West Strawberry Variation and the Salt Creek Canyon Variation will be compared to the portions of the proposed route each would eliminate. The best combination of these route segments will be combined with the proposed route from MP 73-119, MP 176-180, and MP 192-204 for the comparison with the Wasatch Variation (see Figure 1.4-1). The winner will be the preferred route variation in Utah.

1.4.8.1.1 Kern River Proposal (MP 119-176) vs. West Strawberry Variation

As noted in Section 1.4.3 and Table 1.4-1, the significant advantages of this variation include fewer miles of landslide potential and steep slopes, and fewer acres of poor reclamation potential; fewer significant perennial stream crossings and crossings of sensitive streams; and less crucial or high priority big game habitat. The disadvantages of significance include an increase in potential impact to riparian habitat and endangered

Figure 1.4-1

The Kern River Proposed Route with the Utah and Nevada Variations

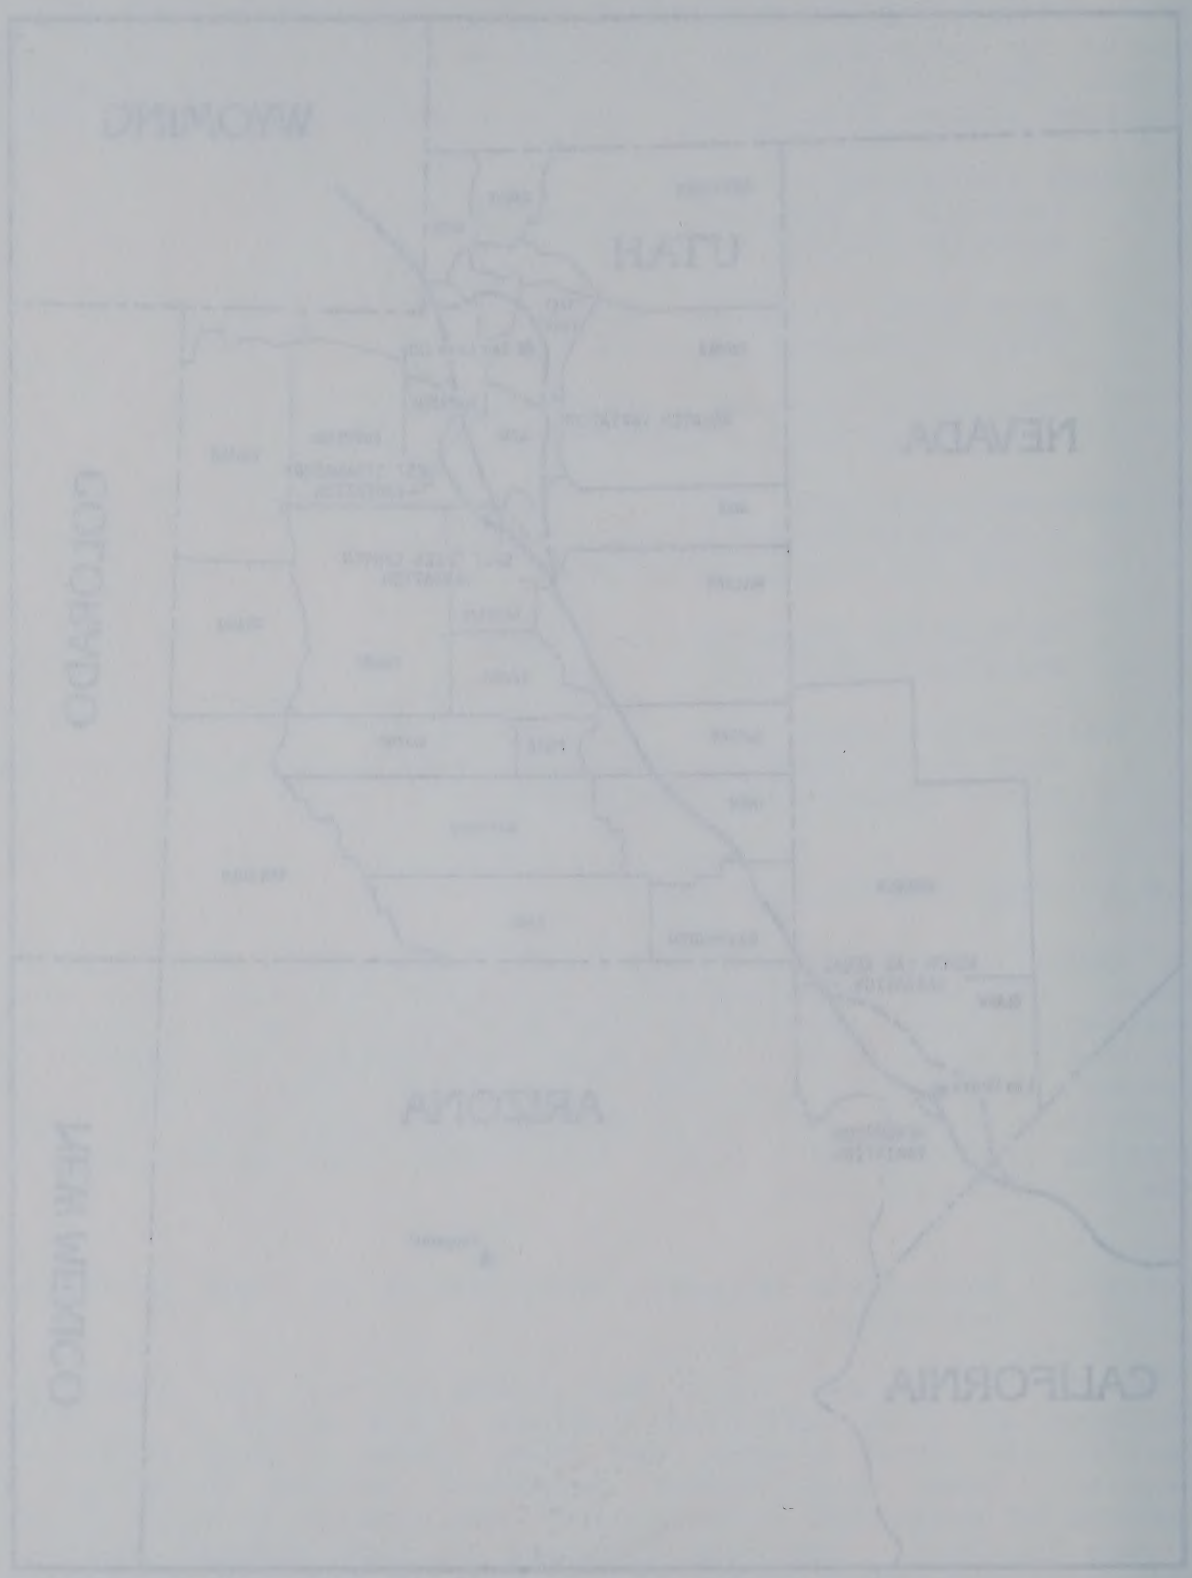
WYOMING
UTAH
NEVADA
COLORADO
ARIZONA
NEW MEXICO
CALIFORNIA

plant habitat; and increase in potential impact to big game fawning/calving areas, upland game bird habitat and raptor nests; additional potential conflicts with recreation and land use; and an increase in potential impacts to paleontologic and visual resources.

The variation would be significantly easier to construct and maintain than the proposed route since the terrain and access would be easier. These factors would also make it easier to mitigate any adverse effects to the resources which have a higher incidence of potential impact from the variation than from the proposed route. Therefore, the West Strawberry Variation would be preferable to the proposed route.

1.4.8.1.2 Kern River Proposal (MP 180-192) vs. Salt Creek Canyon Variation

As described in Section 1.4.4 and Table 1.4-1, the significant advantages of this variation include fewer miles of landslide potential and steep slopes; fewer significant perennial stream crossings and crossings of sensitive streams; fewer acres of vegetation temporarily or permanently disturbed; less crucial or high priority big game habitat and fewer waterfowl critical nesting areas. The disadvantages of significance include an increase in the potential to impact more agricultural land, an increase in the potential to encounter cultural resource sites, and more raptor nests (bald eagle habitat). Also, the Wasatch Fault crossing would lie in a more highly developed area than the proposed route.

The Salt Creek Canyon Variation would be preferable to the proposed route because it avoids several significant concerns on the proposed route. The impact to agricultural lands would be temporary and easily mitigated and the conflict with nesting areas is also easily avoided.

1.4.8.1.3 Kern River Proposal (MP 73-204) Including West Strawberry and Salt Creek Canyon Variations vs. the Wasatch Variation

Table 1.4-2 shows the comparison between the Wasatch Variation and the proposal when modified by the addition of the West Strawberry and Salt Creek Canyon Variations. The significant advantages of the Wasatch Variation include fewer miles of landslide potential and fewer acres of poor reclamation potential; fewer significant perennial stream crossings and crossings of sensitive streams; fewer acres of vegetation temporarily or permanently disturbed; fewer acres of riparian habitat and no endangered plant species; no big game migration corridors or upland game bird sensitive habitat; no land use

Table 1.4-2
KERN RIVER BEST CASE 1/

	Kern River Proposed	Wasatch Variation vs. Proposal with West Strawberry and Salt Creek Canyon Variations	North Las Vegas Var. vs. Proposal with Henderson Variation	Kern River with Wasatch and North Las Vegas Variations Best Case
AIR QUALITY	NSI 2/	NSI	NSI	NSI
GEOLOGY				
Surface fault rupture	23	2 (1)	1 (1)	24
Miles of landslide potential	163	33 (36)	0 (0)	68
Miles of slope greater than 30 %	229	44 (36)	8 (5)	215
SOIL				
Acres of poor reclamation potential	4882	703 (976)	1236 (976)	4324
SURFACE WATER				
Number of stream crossings	135	46 (35)	13 (5)	147
Intermittent stream crossings	83	30 (7)	13 (5)	109
Perennial stream crossings	52	16 (28)	1 (2)	39
Moderate/high significance perennial stream crossings	39	12 (17)	0 (0)	27
GROUNDWATER				
Miles of potential impact	10	4 (2)	0 (1)	6
FRESHWATER BIOLOGY				
Number of sensitive stream crossings with fish present	13	6 (7)	0 (0)	7
TERRRESTRIAL BIOLOGY				
Vegetation				
Total acres of native vegetation temporarily disturbed	8646	855 (1412)	1320 (1211)	8221
Acres of woody vegetation kept cleared for the life of the project	2920	290 (569)	665 (615)	2719
Acres of riparian habitat crossed	98	125 (141)	10 (24)	148

Table 1.4-2 (continued)
KERN RIVER BEST CASE

	Kern River Proposed	Wasatch Variation vs. Proposal with West Strawberry and Salt Creek Canyon Variations	North Las Vegas Var. vs. Proposal with Henderson Variation	Kern River with Wasatch and North Las Vegas Variations Best Case
Vegetation (continued)				
Acres of federally threatened or endangered plant species habitat affected	0	0 (1)	0 (0)	0
Number of species	0	0 (1)	0 (0)	0
Acres of California classified plant species affected	536	0 (0)	0 (0)	536
Number of species	4	0 (0)	0 (0)	4
Acres of cropland temporarily disturbed	1561	425 (205)	0 (2)	1846
Wildlife				
Big game crucial or high priority habitat (acres)	1350	493 (510)	0 (0)	1155
Big game mitigation corridors (acres)	162	0 (77)	0 (37)	48
Big game fawning/ calving areas (acres)	0	0 (50)	0 (0)	0
Upland game bird sensitive habitat (acres)	404	24 (124)	0 (0)	428
Waterfowl critical nesting areas (acres)	60	22 (0)	0 (0)	46
Raptor nesting areas (nests) affected	12	7 (3)	0 (0)	15
Acres of potential threatened or endangered animal habitat	8404	65 (30)	424 (454)	8421
Yuma clapper rail	0	0 (0)	0 (0)	0
Bald eagle	121	65 (30)	0 (0)	168
Peregrine falcon	0	0 (0)	0 (0)	0
Whooping crane	0	0 (0)	0 (0)	0

Table 1.4-2 (continued)
KERN RIVER BEST CASE

	Kern River Proposed	Wasatch Variation vs. Proposal with West Strawberry and Salt Creek Canyon Variations	North Las Vegas Var. vs. Proposal with Henderson Variation	Kern River with Wasatch and North Las Vegas Variations Best Case
Wildlife (continued)				
California condor	1560	0 (0)	0 (0)	1560
Blunt-nosed leopard lizard	339	0 (0)	0 (0)	339
Tehachapi slender salamander	3	0 (0)	0 (0)	3
Desert tortoise	3716	0 (0)	424 (303)	3686
San Joaquin kit fox	333	0 (0)	0 (0)	333
Black-footed ferret	600	0 (0)	0 (0)	600
Utah prarie dog	0	0 (0)	0 (0)	0
Mojave ground squirrel	751	0 (0)	0 (0)	751
Nelson's antelope squirrel	290	0 (0)	0 (0)	290
Tipton kangaroo rat	24	0 (0)	0 (0)	24
Short-nosed kangaroo rat	290	0 (0)	0 (0)	290
Giant kangaroo rat	177	0 (0)	0 (0)	177
SOCIOECONOMICS				
Population change >10%	NO	NO	NO	NO
Total employment change >10%	NO	NO	NO	NO
Income change >10%	NO	NO	NO	NO
Vacancy rates of temporary housing <5%	YES	YES	YES	YES
Local tax base change >10%	YES	YES	YES	YES
Traffic	NSI	NSI	NSI	NSI

Table 1.4-2 (continued)
KERN RIVER BEST CASE

	Kern River Proposed	Wasatch Variation vs. Proposal with West Strawberry and Salt Creek Canyon Variations	North Las Vegas Var. vs. Proposal with Henderson Variation	Kern River with Wasatch and North Las Vegas Variations Best Case
SOCIOECONOMICS (continued)				
Operational noise	NSI	NSI	NSI	NSI
Recreation (conflicts)	6	2 (1)	1 (3)	4
LAND USE/OWNERSHIP				
Conflicts	5	2 (2)	0 (3)	2
CULTURAL RESOURCES				
Number of sites in the direct impact zone	77	5 (1)	6 (5)	81
NRHP listed or eligible sites	4	0 (0)	0 (0)	4
Percentage of line actually surveyed	5	1 (1)	17 (10)	-
High sensitivity segments	9	1 (0)	1 (0)	10
PALEONTOLOGY				
Acres of impact to significant formations	6119	1716 (931)	1305 (1115)	7240
VISUAL RESOURCES				
Acres of high visual impact	524	28 (340)	0 (76)	290

1/ The first entry for each resource under route variations represents the value for the variation segment only; the value in parenthesis represents the comparable quantity for the portion of the proposed route which would be avoided by using this variation.

2/ NSI = No Significant Impact.

conflict with the Uinta National Forest; and fewer acres of high visual impact. The disadvantages of significance include the crossing of an additional geologic fault and increased mileage in steep slopes; an increase in the potential to impact more agricultural lands; increases in the amount of waterfowl critical nesting areas, endangered species habitat, and raptor nesting areas; and potential to impact paleontologic resources.

The Wasatch Variation would be preferable to the modified proposed route since the advantages overshadow the disadvantages. The disadvantages of the variation are more easily mitigated than the disadvantages of the modified proposed route because of increased reclamation potentials and relative ease of mitigation of the wildlife impacts by scheduling changes. While land use conflicts remain, avoidance of the Uinta National Forest resolves a major conflict associated with the proposed route.

The comparison between the Wasatch Variation and the unmodified Kern River Proposal is not significantly different from that outlined in Tables 1.4-1 and 1.4-2. In all significant areas, except potentially affected riparian habitat and upland game bird sensitive habitat, the relative ranking is still in favor of the Wasatch Variation. In addition, the variation is better than the unmodified proposal in terms of amount of steep slope encountered.

1.4.8.2 The Nevada Variations

This group of variations will be compared in the following manner. The Henderson Variation will be compared to the portion of the proposed route it would eliminate. The better of the two route segments will then be combined with the proposed route between MP438-496 and 511-534 for the comparison with the North Las Vegas Variation (see Figure 1.4-1). The winner will be the preferred route in Nevada.

1.4.8.2.1 Kern River Proposal (MP 496-511) vs. Henderson Variation

The only significant advantage of the Henderson Variation is its conformance with planned development and zoning in the town of Henderson. The disadvantages are an increase in acres of poor reclamation potential, and more vegetation temporarily and permanently disturbed.

The variation would be preferable to the proposed route. It would be adjacent to existing roads and section lines for virtually its entire length whereas the proposal cuts across the landscape in most instances and would seldom be adjacent to any section lines or roads. For local planning purposes the

variation would be preferable as it would conform to the local land use plan. In addition, the presence of road rights-of-way has already initiated the impact to vegetation which would result from the variation therefore the incremental effect is unlikely to be as great per unit of right-of-way along the variation as along the proposal route. This is a common advantage to the use of existing corridors.

1.4.8.2.2 Kern River Proposal (MP 438-534) Including the Henderson Variation vs. the North Las Vegas Variation

Table 1.4-2 shows the comparison between the North Las Vegas Variation and the proposed route when modified by the addition of the Henderson Variation. The significant advantages of the North Las Vegas Variation include a decrease in perennial stream crossings and the potential to impact riparian habitat; a decrease in potential impact to big game migration corridors; a decrease in recreation and land use conflicts; and a reduction of high visual impact.

The significant disadvantages of the variation include an increase in the area of poor reclamation potential; an increase in temporary and permanent impact to vegetation; an increase in the potential to encounter cultural resources sites; an increased potential to affect paleontologic resources; and an increase in the potential impact to the desert tortoise.

Comparison of the two routes favors the North Las Vegas Variation. The increase in vegetation impacts and reclamation problems on the variation is offset by the decrease in riparian impact - a more significant concern in desert environments than other natural vegetation. In this particular instance, the riparian habitat avoided would include a wetland area associated with the Las Vegas Wash. Avoidance of this wetland favors the variation. While cultural and paleontologic resources may be more abundant on the variation (it is not certain that they are), mitigation for these resources is usually highly successful. Finally, the variation has substantial advantages in terms of decreased impact to recreation, land use, and visual resources.

Thirty-five miles (424 acres) of desert tortoise crucial habitat would be crossed by the variation as opposed to 25 miles (303 acres) for the proposed route. The staff estimates the variation has the potential to impact 54 tortoises compared to 39 on the proposed route. However, implementation of the mitigation measures outlined by Reyes French [1985] would minimize impact on this species.

Comparison of the two routes is made moot, however, by the present status of the Sunrise Mountain Natural Area. Until Congress acts to remove the area from consideration as

wilderness, the project would not be allowed to pass through it. However, from the previous discussion the staff believes the North Las Vegas Variation would still be the preferable Nevada variation.

1.4.8.3 The California Variations

Table 1.4-1 shows the comparison between the North Bakersfield Variation and the proposed route from MP722 to the end of the delivery laterals. The significant advantages of the variation include a reduction in geologic fault crossings; a decrease in riparian habitat crossed; and a decrease in the potential to affect cultural resources. The significant disadvantages of the variation include increased mileage of landslide potential, high slopes, and poor reclamation; increased temporary and permanent impact to vegetation; increased potential to affect California classified plant species; increased potential to impact threatened or endangered species habitat (five species worse, two slightly better); and increased potential to affect paleontologic resources.

The preferred California Variation is the proposed route.

1.5 INTERSTATE SYSTEMS COMPARISONS

This portion of the comparison deals with the best case scenarios of each of the three interstate pipeline proposals. As stated in Section 1.2.6, the Mojave System C with Alternative B represents the environmentally preferable routing for Mojave. This system includes the 100 MMcfd case for Northwest, the 100/500 MMcfd case for El Paso, and the Mojave proposal. This route would entail construction of 587 miles of pipeline. The El Dorado routes were compared in Section 1.3.7. Since the El Dorado pipeline would receive gas in the same manner as the Mojave proposal, the System C route discussed above represents the best system routing. This El Dorado route would entail construction of 587 miles of pipeline.

The Kern River proposal and variations to the proposed route were compared in Section 1.4.8. This comparison indicates that the Kern River route utilizing both the Wasatch and North Las Vegas Variations represents the environmentally best route. The Kern River routing would entail 867 miles of pipeline construction.

All of the routes in this comparison, therefore, would require somewhere between 587 and 867 miles of pipeline across a multitude of terrain, geologic, vegetative, and wildlife habitat types. The main categories for comparisons of the routes remain unchanged from those discussed above. Table 1.5-1 lists the impacts for each of the routes.

Table 1.5-1

INTERSTATE SYSTEMS COMPARISONS

	Proposed Mojave System A	Preferable Mojave System C 1/ with Alternative B	Proposed El Dorado System A	Preferable El Dorado 2/ System C	Proposed Kern River	Preferable Kern River with Wasatch and North Las Vegas Variations
AIR QUALITY	NSI 3/	NSI	NSI	NSI	NSI	NSI
GEOLOGY						
Surface fault rupture	18	16	18	16	23	23
Miles of landslide potential	27	43	27	43	163	130
Miles of slope greater than 30%	69	45	82	57	229	215
SOIL						
Acres of poor reclamation potential	4768	3483	4343	3052	4882	4324
SURFACE WATER						
Number of stream crossings	74	68	68	61	135	147
Intermittent stream crossings	71	65	65	58	83	109
Perennial stream crossings	3	3	3	3	52	39
Moderate/high significance perennial stream crossings	0	0	0	0	39	27
GROUNDWATER						
Miles of potential impact	30	17	15	7	10	6
FRESHWATER BIOLOGY						
Number of sensitive stream crossings with fish present	0	0	0	0	13	7
TERRESTRIAL BIOLOGY						
Vegetation						
Total acres of native vegetation temporarily disturbed	8465	6561	8549	6697	8646	8221

Table 1.5-1 (continued)

INTERSTATE SYSTEMS COMPARISONS

	Proposed Mojave System A	Preferable Mojave System C 1/ with Alternative B	Proposed El Dorado System A	Preferable El Dorado 2/ System C	Proposed Kern River	Preferable Kern River with Wasatch and North Las Vegas Variations
Vegetation (continued)						
Acres of woody vegetation kept cleared for the life of the project	1765	1774	1838	1797	2920	2719
Acres of riparian habitat crossed	61	60	24	24	98	148
Acres of federally threatened or endangered plant habitat affected	60	0	60	0	0	0
Number of species	1	0	1	0	0	0
Acres of California classified plant habitat affected	947	947	947	947	536	536
Number of species	3	3	3	3	4	4
Acres of agricultural land temporarily disturbed	767	731	525	489	1561	1846
Wildlife						
Big game crucial or high priority habitat (acres)	748	564	748	564	1350	1155
Big game migration corridors (acres)	121	121	121	121	162	48
Big game fawning/ calving areas (acres)	56	0	56	0	0	0
Upland game bird sensitive habitat (acres)	0	24	0	24	404	428
Critical waterfowl nesting areas (acres)	0	0	0	0	60	46
Raptor nesting areas (nests)	0	0	0	0	12	15
Acres of potential threatened or endangered animal habitat affected	9615	9467	8819	8799	8404	8421

Table 1.5-1 (continued)

INTERSTATE SYSTEMS COMPARISONS

	Proposed Mojave System A	Preferable Mojave System C 1/ with Alternative B	Proposed El Dorado System A	Preferable El Dorado 2/ System C	Proposed Kern River	Preferable Kern River with Wasatch and North Las Vegas Variations
Wildlife (continued)						
Yuma clapper rail	151	36	97	36	0	0
Bald eagle	187	72	169	115	121	168
Peregrine falcon	490	60	490	121	0	0
Whooping crane	0	0	0	0	0	0
California condor	1355	1355	1492	1492	1560	1560
Blunt nosed leopard lizard	517	517	388	388	339	339
Tehachapi slender salamander	18	18	0	0	3	3
Desert tortoise	3032	3274	2756	2998	3716	3686
San Joaquin kit fox	647	647	410	410	333	533
Black-footed ferret	1345	1567	1345	1567	600	600
Utah prairie dog	0	0	0	0	0	0
Mohave ground squirrel	727	775	667	667	751	751
Nelson's antelope squirrel	412	412	412	412	290	290
Tipton kangaroo rat	24	24	24	24	24	24
Short-nosed kangaroo rat	410	410	436	436	290	290
Giant kangaroo rat	300	300	133	133	177	177
SOCIOECONOMICS						
Population change >10%	No	No	No	No	No	No
Total employment change >10%	No	No	No	No	No	No

Table 1.5-1 (continued)

INTERSTATE SYSTEMS COMPARISONS

	Proposed Mojave System A	Preferable Mojave System C 1/ with Alternative B	Proposed El Dorado System A	Preferable El Dorado 2/ System C	Proposed Kern River	Preferable Kern River with Wasatch and North Las Vegas Variations
SOCIOECONOMICS						
Income change >10%	No	No	No	No	No	No
Vacancy rates of temporary housing <5%	Yes	Yes	Yes	Yes	Yes	Yes
Local tax base change >10%	1 county	1 county	1 county	1 county	7 counties	7 counties
Traffic	NSI	NSI	NSI	NSI	NSI	NSI
Operational Noise	NSI	NSI	NSI	NSI	NSI	NSI
Recreation (conflicts)	5	5	2	2	6	4
LAND USE/OWNERSHIP conflicts	9	5	6	3	5	2
CULTURAL RESOURCES						
Number of sites in the direct impact zone	82	88	86	95	77	81
NRHP listed or eligible sites in the direct impact zone	2	2	2	2	4	4
Percentage of line actually surveyed or survey coverage within analysis corridor	6	12	12	15	5	6
High sensitivity segments	8	9	9	9	9	10
PALEONTOLOGY						
Acres of impact to significant formations	3205	2571	2935	2454	6119	7240
VISUAL RESOURCES						
Acres of high visual impact	0	0	318	318	524	290

1/ Mojave System C = Mojave/El Paso (100/500)/Northwest (100)
2/ Alternative B keeps Mojave within the desert corridor near Barstow, California
El Dorado System C = El Dorado/El Paso (100/500)/Northwest (100)
3/ NSI = No Significant Impacts

Impacts to air quality would be roughly equivalent for all three interstate systems. The El Dorado system involves two new compressor stations, while the Mojave and Kern River systems would require three each. All three projects would have significant beneficial air quality impacts in the Kern County area.

Impacts to geology would be equivalent for the Mojave and El Dorado systems based on miles of landslide potential and the number of surface fault ruptures. The Mojave system route, however, would have 12 fewer miles of slope greater than 30 percent than the El Dorado route. The Kern River route, on the other hand, would cross 23 faults, 130 miles of areas with landslide potential, and would traverse 215 miles of slope greater than 30 percent.

Soils impacts would be greatest on the Kern River system. This is due to a combination of more miles of slope greater than 30 percent and the generally poor revegetation potential caused by the climatic regime across Utah, Nevada, and California. The El Dorado route would encounter the fewest number of acres with poor reclamation potential. The Mojave proposal lies in the middle.

Impacts to surface water would vary significantly among the three routes. The Mojave and El Dorado systems would only cross three perennial streams and these crossings would not cause significant impacts. The Kern River route would cross 39 perennial streams; 27 of these stream crossings have the potential to be significantly impacted. Some of these impacts can be successfully mitigated; however, it is doubtful that all of the impacts can be mitigated.

The Mojave route would have the greatest number of miles of medium to high impacts to groundwater (17). The Kern River route could potentially impact six miles of sensitive groundwater areas and the El Dorado route could potentially impact seven miles of sensitive groundwater areas. As stated previously, significant impact to groundwater is very unlikely.

Impact to aquatic species would only occur on the Kern River route. Seven sensitive stream crossings would be significantly impacted. Although some mitigation measures may be taken to reduce these impacts, the mitigation measures would not be sufficient to reduce the impacts to insignificance.

Impacts to native vegetation temporarily disturbed would vary from a low of 6,561 acres for Mojave to 8,221 acres for Kern River (see Table 1.5-1). Permanently removed woody vegetation for the routes would be distributed in a similar manner. The Kern River route would impact 2,719 acres while the Mojave and El Dorado routes would remove 1,774 and 1,797 acres respectively.

Significant differences also exist among the routes with regard to acres of riparian habitat crossed. The El Dorado route would cross 24 acres, the Mojave 60 acres, and the Kern River 148 acres.

None of the routes would impact any federally threatened or endangered plant species nor would they impact any suitable habitat of federally listed plant species.

The Kern River route does have the potential to impact four species of California listed plants and would pass through 536 acres of suitable habitat. The El Dorado and Mojave routes, on the other hand, could impact three California listed plant species, but would pass through 947 acres of suitable habitat.

The El Dorado route would temporarily disturb the least amount of agricultural land: 489 acres. Mojave would disturb 731 and Kern River would disturb 1,846 acres. All of these impacts, however, would represent a temporary disturbance, generally only during one growing season.

El Dorado would affect 273 acres of orchards and vineyards for the life of the project. Kern River would remove 242 acres of orchards and vineyards for the life of the project. The Mojave route would remove 158 acres of orchards and vineyards for the life of the project.

Wildlife impacts have been divided into two subcategories: general wildlife disturbance and disturbance to threatened or endangered species. Impacts to general wildlife species would occur to big game critical habitat (564 acres), big game migration corridors (121 acres), and upland game bird sensitive habitat (24 acres) on both the Mojave and El Dorado routes. The Kern River route would impact big game critical habitat (1,155 acres), big game migration corridors (48 acres), big game upland game bird sensitive habitat (428 acres), critical waterfowl nesting areas (46 acres), and 15 raptor nests.

The Kern River route, although significantly impacting game species, has fewer impacts to threatened or endangered wildlife species. The Kern River route could impact 12 federal or California state listed species and would cross 8,421 acres of suitable habitat. The El Dorado route could impact 13 federal or California state listed species and could cross 8,799 acres of suitable habitat. The Mojave route could impact 14 federal or California state listed species and could cross 9,467 acres of suitable habitat.

Socioeconomic impacts would be roughly equivalent along all three of the routes. The Kern River route would have positive impacts to seven counties, increasing the tax base by more than 10 percent. One county would receive a positive impact to the tax

base from the Mojave or El Dorado routes. Other positive socioeconomic impacts would occur for all three projects in the areas of employment and income benefits. No significant impacts would occur on any of the routes concerning traffic or noise. The noise levels around the compressor stations for Kern River, Mojave, and El Dorado will add to the ambient noise levels.

Kern River could conflict with four recreation areas. Mojave could conflict with five recreational areas. The El Dorado route could conflict with two recreational areas.

The El Dorado route would conflict with land use in three areas. Mojave would involve five land use conflicts. Kern River would involve two land use conflicts.

Cultural resource impacts are difficult to determine prior to completion of a Class III inventory survey. The Kern River route contains two 25-mile long segments with a very high sensitivity rating and eight segments with a high sensitivity rating. Mojave and El Dorado, on the other hand would have nine segments having a high sensitivity rating. The Kern River route would directly impact fewer known sites than either the Mojave or El Dorado routes (see Table 1.5-1). The Kern River route contains two more NRHP sites than the other two routes and the direct survey of the ROW is not as complete as for the other two lines. The El Dorado route has been surveyed at a higher percentage than any of the other routes.

Potential paleontological impacts would be less severe along the El Dorado route (2,454 acres) than either the Mojave (2,571 acres) or Kern River routes (7,240 acres).

Significant impacts to visual resources would only occur on the El Dorado and Kern River routes. The impacts on the Kern River route may require significant mitigation measures to reduce the impacts to acceptable levels.

Based on the data presented above, all three of the routes have environmentally superior components. The Mojave route would cause fewer significant impacts to geology, general vegetation, and visual resources. The El Dorado route would cause fewer significant impacts to soils, groundwater, riparian vegetation, agricultural land, recreation, and paleontology. The Kern River route would cause fewer significant impacts to threatened and endangered plants and wildlife and land use. El Dorado and Mojave would cause similar impacts to freshwater biology, general game species wildlife, and surface water, but significantly less impact than Kern River. There would be no significantly different impacts on socioeconomics or cultural resources among the three projects.

2.0 INTRASTATE SYSTEM ALTERNATIVES COMPARISON ANALYSES

2.1 THE INTEGRATED INTRASTATE SYSTEM ALTERNATIVE

Both PG&E and SoCal have presented flow diagrams indicating that under existing contract capacity, they have the capability of supplying at least 690 MMcfd from the California/Arizona border to the EOR market as an integrated intrastate system with no additional facility requirements through 1994-1995. Although the intrastate companies have indicated that toward the end of the decade, they will require additional facilities to serve the full amount, this is probably also true for El Paso, Northwest, and Transwestern. This supply would be provided to PG&E and SoCal by Transwestern and El Paso utilizing existing capacity since the intrastates have specified they would serve the market through existing entitlements.

This system would require the equivalent of the Mojave Transfer Line. It could also require the addition of up to 2,000 hp of compression by turbocharging existing compressors at the Hinkley Compressor Station on PG&E's system. Addition of compression makes the system capable of transporting at least 700 MMcfd through 1994-1995 and therefore it is included to compare the system to Kern River. The compression is unnecessary for a comparison to Mojave or El Dorado. This will be referred to as the Integrated Intrastate System.

Table 2.1-1 provides a summary of impacts on the integrated intrastate system.

2.2 THE EAST LAS VEGAS/INTEGRATED INTRASTATE SYSTEM ALTERNATIVE

The East Las Vegas Alternative was suggested by the FERC staff as a possible means of reducing pipeline mileage associated with Kern River's proposed route between Las Vegas, Nevada, and Bakersfield, California. This alternative would follow the proposed Kern River route including the Wasatch Variation to a point north of Henderson, Nevada, at MP 514 (MP 491 of the proposed route) and then extend due south to a point west of Camino, California; it basically would follow the route originally proposed by the Rocky Mountain Pipeline Project (RMPP).

The final 15 miles of this alternative would intersect major intrastate transmission facilities owned by SoCal and PG&E. The gas would be delivered to both of these systems which would operate in an integrated fashion using spare capacity to transport the gas 260 miles westward to the Bakersfield area.

Table 2.1-1
INTRASTATE SYSTEMS ALTERNATIVES SUMMARY OF IMPACTS

	Integrated Intrastate System	East Las Vegas System
AIR QUALITY	NSI[1]/ 1 station [2]/	NSI 3 stations [2]/
GEOLOGY		
Surface fault rupture	0	12
Miles of landslide potential	0	53
Miles of slope greater than 30 %	0	185
SOIL		
Acres of poor reclamation potential	162	2928
SURFACE WATER		
Number of stream crossings	3	113
Intermittent stream crossings	3	75
Perennial stream crossings	0	38
Moderate/high significance perennial stream crossings	0	27
GROUNDWATER		
Miles of potential impact	0	12
FRESHWATER BIOLOGY		
Number of sensitive stream crossings with fish present	0	7
TERRRESTRIAL BIOLOGY		
Vegetation		
Total acres of native vegetation temporarily disturbed	206	6737
Acres of woody vegetation kept cleared for the life of the project	103	1169
Acres of riparian habitat crossed	1	149
Acres of federally threatened or endangered plant species habitat affected	0	0
Number of species	0	0
Acres of California classified plant species affected	0	422
Number of species	0	3

Table 2.1-1 (continued)
INTRASTATE SYSTEMS ALTERNATIVES SUMMARY OF IMPACTS

	Integrated Intrastate System	East Las Vegas System
Vegetation (continued)		
Acres of cropland temporarily disturbed	0	1641
Wildlife		
Big game crucial or high priority habitat (acres)	0	1155
Big game mitigation corridors (acres)	0	85
Big game fawning/ calving areas (acres)	0	0
Upland game bird sensitive habitat (acres)	0	428
Waterfowl critical nesting areas (acres)	0	46
Raptor nesting areas (nests) affected	0	14
Acres of potential threatened or endangered animal habitat	502	4441
Yuma clapper rail	103	0
Bald eagle	103	186
Peregrine falcon	103	0
Whooping crane	0	0
California condor	0	1524
Blunt-nosed leopard lizard	0	339
Tehachapi slender salamander	0	0
Desert tortoise	193	689
San Joaquin kit fox	0	316
Black-footed ferret	0	600
Mohave ground squirrel	0	0
Nelson's antelope squirrel	0	290
Tipton kangaroo rat	0	30

Table 2.1-1 (continued)
INTRASTATE SYSTEMS ALTERNATIVES SUMMARY OF IMPACTS

	Integrated Intrastate System	East Las Vegas System
Wildlife (continued)		
Short-nosed kangaroo rat	0	290
Giant kangaroo rat	0	177
SOCIOECONOMICS		
Population change >10%	No	No
Total employment change >10%	No	No
Income change >10%	No	No
Vacancy rates of temporary housing <5%	Yes	Yes
Local tax base change >10%	No	Yes
Traffic	NSI	NSI
Operational noise	NSI	NSI
Recreation (conflicts)	1	1
LAND USE/OWNERSHIP		
Conflicts	3	7
CULTURAL RESOURCES		
Number of sites in the direct impact zone	0	60
NRHP listed or eligible sites	0	2
Percentage of line actually surveyed	22	<4
High sensitivity segments	0	5
PALEONTOLOGY		
Acres of impact to significant formations	0	5844
VISUAL RESOURCES		
Acres of high visual impact	0	165

1/ NSI = No Significant Impacts

2/ Turbocharging at existing Hinkley Compressor Station is only needed to make this alternative comparable to Kern River; it is not needed as an alternative to Mojave or El Dorado. The East Las Vegas Alternative would require three new compressor stations plus turbocharging at Hinkley.

Use of the East Las Vegas Alternative would substitute 105 miles of pipeline construction between Las Vegas and the Camino area for the 271 miles proposed by Kern River. Again, the FERC staff has included the addition of up to 2,000 hp of compression by turbocharging existing compressors at the Hinkley Compressor Station on PG&E's system. Table 2.1-1 provides a summary of impacts on the East Las Vegas System Alternative.

2.3 NORTHWEST/PGT/INTEGRATED INTRASTATE SYSTEM ALTERNATIVE

This alternative was developed by the FERC staff to explore the feasibility of providing the EOR/cogeneration industry with direct access to major sources of natural gas in western Canada and the southwest/southcentral United States by way of existing transmission systems without construction of a major new system as proposed by Kern River. The alternative would use two major gas transmission corridors linking production regions with the Bakersfield area. One corridor would extend south from Canada through Idaho, Washington, Oregon, and California along interstate and intrastate pipelines owned by Northwest, PGT, and PG&E. The other corridor extends between west Texas and southern California using the pipeline systems owned by Transwestern or El Paso to interconnect with PG&E and SoCal at the California border.

This system alternative would not require additional facilities along either corridor; therefore, there are no impacts to enter in Table 2.1-1.

2.4 COMPARISONS OF THE INTRASTATE SYSTEMS

The impacts to the various intrastate systems were presented in Table 2.1-1. The Integrated Intrastate System has essentially been analyzed in both the Mojave (Section 1.2) and El Dorado (Section 1.3) sections. The East Las Vegas System was essentially analyzed in Section 1.4. The Northwest/PGT Integrated Intrastate System has not been previously analyzed since it involves no facility construction. Because it involves no construction, it would involve no significant impacts. Therefore it is clearly environmentally superior and need not be compared below.

The air quality impacts for each of the intrastate system alternatives would conform with all applicable federal and state laws. The East Las Vegas System would require three new compressor stations plus turbocharging existing units at the existing PG&E compressor station at Hinkley, California. The Integrated Intrastate System would only require the upgrading at the Hinkley station.

Impacts to geology would vary along the two systems. The Integrated Intrastate System would cross no surface faults, potential landslide areas, or terrain with more than 30 percent

slope. The East Las Vegas System would cross 12 faults, 53 miles of potential landslide areas, and 185 miles of slope greater than 30 percent.

Impacts to soils would occur along both of the system routes. The East Las Vegas System would have the greater impact, disturbing 2,928 acres, followed by the Integrated Intrastate System with 162 acres of disturbance.

Surface water impacts would vary widely along the system routes. The most pertinent categories in Table 2.1-1 would be perennial stream crossings and moderate/high significance stream crossings. Using these two categories, the East Las Vegas System with the Wasatch Variation would cross 38 perennial streams and would have significant impacts to 27 stream crossings. The Integrated Intrastate System B would cause no significant impacts to streams.

Impacts to groundwater vary widely among the routes. The Integrated Intrastate System would cross no miles of sensitive area whereas the East Las Vegas would cross 12 miles. Since groundwater impacts can be easily mitigated, each of the systems would be acceptable.

Only the East Las Vegas System would have impacts to freshwater biology. This route would cause significant impacts to seven sensitive streams.

Impacts to vegetation can be divided into two subcategories: general vegetation disturbance and impacts to threatened and endangered plant species. Impacts to general vegetation would be generally dependent on the miles of construction (see Table 2.1-1). Based on these figures the Integrated Intrastate System route would have fewer impacts than the East Las Vegas System.

Impacts to threatened or endangered plant species would be in general more significant than those to general vegetation. Neither route would impact federally endangered plants, but only the East Las Vegas System would impact California state listed plants and plant habitat.

Wildlife impacts can also be divided into two subcategories: general wildlife disturbance and disturbance to threatened or endangered species. From a general wildlife perspective the Integrated Intrastate System route would cause fewer impacts to wildlife game species than the East Las Vegas System.

Impacts to threatened or endangered wildlife species would occur on both of the system routes. Except for the Yuma clapper rail and peregrine falcon, the East Las Vegas System would have the potential for more impact on each species as the Integrated Intrastate System route.

Socioeconomic impacts would be minimal along both of the system routes. The East Las Vegas System would have beneficial impacts to seven counties with regard to changes in the county tax base. The Integrated Intrastate System would have beneficial impacts to one county. No significant impacts would occur to traffic along either of the system routes.

The East Las Vegas System would require four new compressor station locations versus none for the Integrated Intrastate System. The Integrated Intrastate System would have less noise impact than the East Las Vegas system.

Conflicts to recreation facilities would occur along both the routes. These conflicts would be temporary in nature and should not occur beyond the construction phase.

Both of the routes would encounter land use conflicts. The Integrated Intrastate System would have three land use conflicts. There would be seven land use conflicts on the East Las Vegas route.

Impacts to cultural resources are difficult to determine prior to the staking of the route. The Integrated Intrastate System would contain no segments with a high sensitivity rating while the East Las Vegas System would contain two very high and three high sensitivity segments. The East Las Vegas System would impact at least 60 sites within the ROW as mapped. There are no known sites on the Integrated Intrastate System. The East Las Vegas System could potentially affect two NRHP properties, as opposed to none on the Integrated Intrastate System.

Impacts to paleontology would be nonexistent on the Integrated Intrastate System whereas the East Las Vegas System could affect 5,844 acres.

Finally, significant impacts to visual resources would not occur along the Integrated Intrastate System. The East Las Vegas System would cause significant impacts to 165 acres of scenic areas.

Based on all of the data presented above, the Northwest/PGT Integrated Intrastate System would cause no significant impacts. This route would be far superior to any of the intrastate systems discussed above, since no construction would be required to transport natural gas into the California market. The next best route would be the Integrated Intrastate System. The main disadvantage to this route involves potential land use problems.

The worst route from an environmental perspective would be the East Las Vegas System. This route would require the most new compressor stations, has the most difficult terrain from a geological perspective, would have significant impacts to surface water and freshwater biology, would impact larger areas of big game habitat, and would impact more acres of potential threatened or endangered species.

3.0 CONCLUSIONS AND RECOMMENDATIONS

Information provided by the applicants and further developed from field investigations, literature research, special studies, and contacts with local, state and federal agencies indicate that construction and operation of any of the proposed interstate natural gas pipeline projects would have limited, although in some cases significant, adverse environmental impact and that the proposed projects as stated in Section 1 of Volume III are environmentally acceptable, assuming the FERC finds sufficient need for such a project.

Several total system alternatives were investigated. The Mojave System utilizing the El Paso 600 MMcfd and Northwest 100 MMcfd expansions (System C) would entail 587 miles of pipeline construction. The main advantage of this system is that only 230 miles of pipeline would need to be constructed totally outside of existing ROW. Since the El Paso and Northwest expansions would involve looping of existing lines, the impacts to these areas would not be as great as would occur if these expansions involved totally new lines. A possible exception to this statement could be potential impacts to cultural resources.

The main disadvantages to construction of the looping projects involve impacts to the environment with regard to vegetation, wildlife, and cultural resources. These impacts, although they occurred during previous construction, would be increased for the expansions. Most of these impacts could be significantly reduced if the mitigation measures discussed in Section 4 were employed; however, certain impacts would be unavoidable.

Significant impacts caused by the construction of the proposed Mojave System across California would include effects on soils, native vegetation, wildlife, land use, and cultural resources.

The El Dorado system alternative would utilize the same facilities outside of California as were discussed for Mojave. Essentially, the El Dorado route would cause the same types of impacts as were discussed for Mojave. El Dorado would have fewer long-term impacts on air quality and noise since one less compressor station would be required.

The Kern River system utilizing both the Wasatch and North Las Vegas Variations would be approximately 867 miles long. The main disadvantage of this system is that all of the route would entail new construction. Portions of the route would parallel existing ROWs and utility corridors, and in some instances, use existing ROWs.

Other major disadvantages of the Kern River route include the construction of three new compressor stations causing impacts to

both air quality and noise, slope stability problems and seismic hazards along the Wasatch Variation, impacts to soil, impacts to both surface water and freshwater biology, impacts to vegetation and agricultural land, impacts to paleontological resources, incompatibility with land use plans and recreation, and new impacts to visual resources.

The Kern River Mainline and variations are not consistent with the Land and Resource Management Plan for the Wasatch-Cache National Forest. If a proposed project cannot be made consistent with the Plan by mitigation, then the Plan may have to be amended before the Forest Service can concur with the issuance of a right-of-way grant. The Forest Service's decision on whether to amend the affected Plan will be based on the project EIR/EIS, FERC's certification decision, and additional analysis, where needed. The USDA Forest Service has prepared Erosion Control, Revegetation and Restoration Guidelines and General Mitigation Measures that will apply to National Forest System lands. These guidelines and measures would become part of the BLM ROW grant and notices-to-proceed; and compliance to these items during and after construction would be carried out by Forest Service representatives. Refer to Volume I, Section 4.10.1 for these items.

The major advantage of the Kern River system route with the Wasatch and North Las Vegas Variation includes fewer impacts to threatened and/or endangered plant and wildlife species, and land use.

The environmental staff feels that on environmental grounds any of these systems could be made acceptable. This should not be construed to imply that there are no impacts or that the impacts are benign. However, economic and other non-environmental factors may play an important role in determining which of these projects would be best. Consideration of these factors is beyond the scope of this EIR/EIS; however they will be given full consideration in the later phases of the FERC certification process.

The environmentally preferred interstate proposal is the Mojave System with route modifications described in the EIR/EIS. This conclusion is based on two major premises: (1) these systems would involve significantly less environmental impact, even if built with all supply projects as proposed; and (2) the supply projects of El Paso and Transwestern could be phased to match actual market requirements as the EOR/cogeneration market evolves. El Dorado is an alternative route but no longer a competitor to Mojave. Where its route has some advantages over the Mojave Proposal, they are recommended.

The first premise results from the fact that Kern River entails substantially more miles of pipeline construction and substantially more compression, crosses sensitive environmental areas, crosses one of these areas which the U.S. Forest Service has

emphasized (and the staff agrees) would be difficult to construct and maintain without long-term environmental impact, and is not immediately adjacent to existing utilities to the extent the other systems are.

The Kern River route would involve the greatest geological impacts, including surface fault rupture, miles of landslide potential, and miles of slope greater than 30 percent; soils; surface water, including number of stream crossings, intermittent stream crossings, perennial stream crossings, and significant stream crossings; freshwater biology; vegetation, including total acres of native vegetation temporarily disturbed, acres of woody vegetation kept cleared for the life of the project, acres of riparian habitat disturbed, and acres of agricultural land temporarily disturbed; wildlife, including acres of big game critical or high priority habitat affected, acres of upland game bird sensitive habitat affected, acres of critical waterfowl nesting areas affected, and the number of raptor nesting areas affected; and paleontological resources. It would also involve at least one substantial land use obstacle as noted previously.

In the case of the Mojave proposal or El Dorado Alternative systems, no areas of significant construction or maintenance difficulty would be involved on the recommended routes, and major portions of the routes would be immediately adjacent to existing pipeline ROW. In addition, the supply lines would be entirely adjacent to existing pipelines and would share significant portions of previously disturbed ROW.

The Mojave system would have greater impacts to air quality and noise than the El Dorado system. It would also have marginally greater impacts to soils; surface water, including number of stream crossings; groundwater; acres of agricultural land temporarily disturbed; acres of potential threatened or endangered animal habitat affected (Tehachapi slender salamander, desert tortoise, blunt-nosed leopard lizard, San Joaquin kit fox, Mohave ground squirrel, and giant kangaroo rat); recreation conflicts; land use conflicts; and paleontological resources.

The El Dorado Alternative system would have greater impacts due to miles of slope greater than 30 percent, acres of riparian habitat crossed, impacts to California condor, bald eagle, short-nosed kangaroo rat, and peregrine falcon, cultural resources, and visual resources than would the Mojave system.

When compared to Kern River, the Mojave and El Dorado systems would have greater impacts to acres of California state listed plant species and habitat affected; acres of big game migration corridors affected, and acres of potential threatened or endangered animal habitat affected, (the Yuma clapper rail, peregrine falcon, blunt-nosed leopard lizard, Tehachapi slender salamander, San Joaquin kit fox, black-footed ferret, Nelson's antelope squirrel, short-nosed kangaroo rat, and giant kangaroo rat).

Premise number two is simply a reflection of the fact that existing systems may be expanded incrementally as the EOR/cogen market develops. Kern River must impact the environment along the entire proposed ROW regardless of the amount of gas initially or ultimately needed for that market. The environment along the El Paso and Transwestern systems involved in the proposed expansion can be impacted incrementally if the market does not materialize instantly at the level specified in the applications. Indeed, if it never attains that level, the environmental impact may be contained at a lower level.

It is staff's further position that the Transwestern Expansion may be unnecessary since the El Paso system may be able to supply all of the design requirements of either Mojave of El Dorado with substantially fewer new facilities. The question of El Paso being able to supply the entire volume is being addressed in the FERC's hearing process.

As presented in the analyses of the intrastate systems in Section 2, the Northwest/PGT/Integrated Intrastate System Alternative would cause no environmental impacts. Based on purely environmental grounds this intrastate system alternative would be far superior to any of the interstate systems discussed above. However, the Integrated Intrastate System is also vastly preferable to the other systems since it includes only minimal facilities. However, it is not known at this point if the intrastate system alternative could meet one of the main goals of the project i.e., supplying a firm supply of gas to the EOR market. Again this is beyond the scope of the EIR/EIS but will be given full consideration in the later phases of the FERC certification process.

If the certification process determines that the intrastate system does meet the stated goals of the project, the Northwest/PGT/Integrated Intrastate System Alternative or the Integrated Intrastate System would be the environmentally preferred systems.

To adequately protect the environment, all of the mitigation measures outlined in Section 4 of both Volumes I and II shall be recommended for incorporation into the FERC certificate. These measures have been divided into two categories: general measures which would be applicable to all of the projects, and measures designed to address the specific problems associated with individual systems. In several instances the staff recommended measures which have already been proposed by certain applicants and/or reworded by staff. The staff also recognizes that a limited number of the general measures may not apply to all the applicants.

Staff also recognizes that during the course of the on-going FERC hearing, which commenced September 9, 1987, that both Kern River and Mojave have testified that they are willing to make and/or have made route modifications to their respective proposed routes in order to eliminate most of the land use and recreation impacts

addressed in this Final EIR/EIS. Most of these route modifications were previously recommended in the Draft EIR/EIS. For example, Kern River has testified that they would accept a FERC certificate which would require them to use the Wasatch and North Las Vegas Variations. This would eliminate the land use and recreational conflicts associated with the Uinta National Forest, Sunrise Mountain Natural Area, Rainbow Gardens, Las Vegas Wash, and the city of Henderson. Mojave has testified that they have already made specific route modifications which would eliminate impacts to Tehachapi Mountain Park, Kern River County Park, and the residential areas of Stallion Springs and Indian John Spring. The modifications would also put the proposed route back in BLM utility corridors from which it deviated and also place the route outside of property owned by Edwards Air Force Base thereby eliminating this land use conflict. Although commitments have been made by each applicant, staff has retained its previous recommendations to avoid the land use and recreational impacts in the Final EIR/EIS. There is also one route modification near the beginning of the Kern Lateral which is outside the one-mile corridor studied in this EIR/EIS. This route modification is less than 1-1/2 miles long and is less than 1/2 mile outside the studied corridors. With the possible exception of impacts to biological and cultural resources, the impacts are expected to be minor. With respect to biological and cultural resources, staff's mitigation measures, which require further studies for these resources, should mitigate impacts to these resources.

3.1 GENERAL STAFF RECOMMENDED MITIGATION MEASURES

3.1.1 Air Quality

General Impact: High dust levels would be present during construction.

1. The ROW shall be watered to keep dust down to a manageable level.

General Impact: Construction vehicle emissions would exceed stationary source levels.

2. Construction emissions shall be mitigated through proper maintenance of construction equipment, and by maintaining manufacturer-installed exhaust systems for construction emissions.

General Impact: High vehicle emissions would be present during construction.

3. Impacts shall be reduced by optimizing air-to-fuel ratios and retarded ignition timing ~~This could reduce NO_x emissions by up to 30 percent.~~ on construction vehicles.

3.1.2 Geology

General Impact: Geologic and seismologic hazards may result in ~~erosion and/or landslides and subsequent~~ damage to the pipeline and related facilities, and significant indirect effects.

4. Detailed geologic, seismologic, and geotechnical studies shall be conducted by the applicant to identify and characterize geologic hazards as appropriate. In areas where hazards are identified, information shall be collected to aid in the design and construction of the pipeline and ancillary facilities. ~~Emphasis shall be placed on arroyo crossings to protect the pipeline from flash floods and to prevent erosion of the trench backfill material near arroyos.~~ In general, care shall be taken during construction to minimize surface disturbance and related soil erosion, and not to alter the drainage of the affected area.

5. Additional studies shall be conducted by the applicant to evaluate potential seismological hazards along the proposed routes. The potential for surface offset along Quaternary faults shall be evaluated in detail so that appropriate pipeline crossings can be designed. Field studies shall be completed to delineate the areas where movements may occur.

General Impact: Hydrocompaction and subsidence may occur along portions of the route.

6. The construction of the proposed projects would probably not introduce water that might cause hydrocompaction; however, care shall be taken during construction so as not to disturb the drainage of the affected area and to avoid producing any depressions in which water could pond.

General Impact: Unstable slopes may result in landslides which could result in a pipeline rupture.

7. Field studies shall be completed to locate and characterize potentially unstable slopes and other surficial features. ~~including sand dunes.~~ Monitoring and surveillance programs shall be implemented, if necessary. Known landslide areas where new construction could jeopardize prior existing rights should be avoided.

General Impact: Pipeline construction in geologically hazardous areas can significantly affect public safety.

8. Results of the proposed applicants' geotechnical studies indicated in Nos. 4, 5, and 7 above shall be submitted to the FERC. The following geotechnical studies and mitigating

design measures shall be submitted for review and approval by the FERC staff prior to implementation of these measures. Such studies shall include identification of: (a) all Holocene faults crossed by the proposed facilities; (b) all areas where potentially liquefiable deposits are crossed and likely effects on the facilities; and (c) all landslides or areas of significant slope instability crossed by, or possibly affecting, the proposed facilities.

Specific mitigating measures shall be developed to minimize the potential for slope failures, ruptures or failure of pipeline facilities wherever such failure could result in direct or indirect hazards to public safety and environmental resources. The nature and locations of significant geologic hazards shall be considered in the siting of block valves. The applicant shall also consider use of automatic or remote-controlled block valves in areas which may be inaccessible following a major earthquake or landslide.

Studies shall be done in sufficient detail to allow characterization of the particular geologic hazard using state-of-the-art techniques. Sufficient justification should be included for not implementing specific mitigating measures in areas identified as subject to significant geologic hazards.

9. Accepted industry construction standards would be used to mitigated potential damage due to geological factors.

10. The topography of the corridor shall be restored to near its original contour.

11. Special methods including the use of padded ditch and heavy wall pipe shall be considered ~~at fault crossings~~ on a site-specific basis.

General Impact: Mass failure of vertical streambanks may result in exposure of and subsequent damage to pipeline.

12. Where necessary to protect pipeline from exposure, place riprap or other acceptable streambank erosion control structures on the outside bends of streams with high vertical banks.

3.1.3 Soil

General Impact: Loss of topsoil.

13. Selective salvage and replacement of topsoil (A horizon) shall be done for ~~agricultural~~ cultivated lands and those lands for which the land management agency or the landowner requests that topsoil be salvaged and replaced or on lands

underlain by soils poorly suited or with unsuitable reclamation potential. Topsoil shall not be used for filling of sack breakers or for padding of the trench.

14. Materials unsuitable for backfilling or excess backfill material shall be disposed of by environmentally acceptable measures as arranged by the land management agency or landowner.

General Impact: Removal of vegetative cover or desert pavement resulting in increased erosion.

15. Preparation of surface shall be done to receive seed, including surface roughening and tilling across slopes, and seeding with native grass, adapted grass or other plant species.

16. To limit steepness or length of slopes, erosion control features, such as water bars, collection ditches, terraces, rock mulch (riprap), sand bars, or straw bales shall be used for temporary and permanent control.

17. The applicant shall minimize the amount of vegetation removed, and where it is removed leave the roots intact.

18. The applicant shall minimize the time interval between clearing, construction, and reseeding.

19. During construction of the project, ~~an~~ on-site reclamation specialists, certified by The Soil Conservation Society of America, shall be employed by the company for each construction spread to provide direct applicable restoration procedures when special conditions are encountered, without causing construction delays and to provide liaison with the FS/BLM officials.

General Impact: Reduction in soil productivity.

20. The applicant shall add soil amendments, including fertilizer, and use appropriate seeding methods to aid in the development of a positive growth medium where deemed necessary through consultation with land management agencies or private land owners.

General Impact: Accelerated soil erosion.

21. Where practical, as determined by the appropriate regulatory agency, the pipeline shall be located on sideslopes of less than 30 percent.

22. Cultivation and land preparation operations on steeply sloping areas shall be done on the contour (if feasible) to minimize erosion.

23. Fencing of ROW through rangeland shall be done, subject to site specific analysis and/or negotiation with the landowner/land management agency, to allow undisturbed re-establishment of vegetation. In the absence of recommendations on the location of crossovers from local land managers or permittees, crossovers shall be located every 500 yards. Fencing of disturbed riparian areas in non-rangeland will be required to prevent grazing damage from big game to newly established vegetation.

24. The applicant shall minimize the areas of disturbance to a minimum necessary to construct and operate the pipeline. Steep slopes and particularly sensitive areas prone to significant impact shall be avoided where practicable.

25. Suitable mulches and other soil stabilizing practices shall be used, as required by site specific conditions, on all regraded and topsoil areas identified in consultation with jurisdictional land management agencies and land owners, to protect unvegetated soil from wind and water erosion and to improve water absorption.

26. Soil areas with rock fragments, such as very coarse gravel, cobble or stone scattered on the surface or desert pavement conditions shall be restored as nearly as possible to the original preconstruction surface condition to blend with the adjoining area, to avoid a smooth surface ROW area, and to control accelerated erosion.

General Impact: Ineffective stabilization and reclamation on federal lands.

27. On federal lands, a detailed site-specific geotechnical and restoration and reclamation plan shall be developed and become part of the Forest Service/Bureau of Land Management construction, operation, and maintenance (COM) plan. Because the proposed ROW is composed of many types of terrain, soils, water, bedrock, vegetation, land uses, and climatic conditions, the detailed plan shall include sets of techniques and measures tailored to each condition encountered. Local expertise and locally effective slope stabilization and reclamation methods shall be followed when the site-specific procedures for the detailed plans are developed. Site-specific geotechnical and erosion control, revegetation, and restoration measures from the plans shall be implemented under the direction of the appropriate agency official. Consultation with all appropriate state and federal agencies and other local

experts will be required when developing detailed site-specific revegetation plans.

28. For non-federal lands, develop and implement site-specific erosion control, revegetation, and stabilization plans according to BLM, FS, SCS, and other federal and state agency guidelines or criteria.

29. All topsoil on federal lands shall be conserved for reclamation requirements unless otherwise directed by the FS/BLM; excess topsoil shall be stockpiled at designated locations. ~~Topsoil shall be removed from the trench area by double ditching (i.e., windowed separately, protected, and replaced last during backfilling).~~ Topsoil shall be removed, windrowed separately, protected, and replaced last during backfilling.

30. During adverse weather conditions, as determined by the FS/BLM authorized officer, stop and start orders on federal lands shall be issued to prevent rutting or excessive tracking of soils and deterioration of vegetation in the ROW area.

31. On all federal lands, design and construction of all temporary, reconstructed, and newly constructed roads shall be based on an approved COM plan transportation section and shall ensure proper drainage, minimize soil erosion, and preserve topsoil. This plan shall include clearing work, rehabilitation, and use and maintenance agreements associated with transportation needs.

    Where possible, the ROW itself shall be used as an access road during the construction period. The FS may require that the access roads paralleling this pipeline be closed and vegetative cover re-established after pipeline construction is completed and may not permit maintenance roads along the pipeline route. ~~shall be permitted.~~

    Overland access may be specified in lieu of road construction or reconstruction.

    All temporary roads shall be closed and areas restored without undue delay or maintained as specified in the ROW grant(s) or special use permit(s). Restoration to near original slope and contour, including redistribution of topsoil, would be to the satisfaction of the ~~FS~~ appropriate land management agency.

32. On federal lands, a specific trenching and excavated material stockpiling procedure shall be used on steep-sloping and rough, broken terrain to ensure ~~maximum~~ minimum disturbance as outlined in the FS/BLM COM plan.

access will be required when developing detailed site-specific revegetation plans.

28. For non-federal lands, develop and implement site-specific erosion control, revegetation, and stabilization plans according to BLM, FS, SCS, and other federal and state agency guidelines or criteria.

29. All topsoil on federal lands shall be conserved for reclamation requirements unless otherwise directed by the FS/BLM. Excess topsoil shall be stockpiled at designated locations. Topsoil shall be conserved from pre-construction activities, and protected from excessive wind and water erosion, contamination, or displacement. Topsoil shall be removed, windrowed separately, protected, and replaced last during backfilling.

30. During adverse weather conditions, as determined by the FS/BLM authorized officer, stop and start orders on federal lands shall be issued to prevent rutting or excessive tracking of soils and deterioration of vegetation in the ROW area.

31. On all federal lands, design and construction of all temporary, reconstructed, and newly constructed roads shall be based on an approved CCM plan transportation section and shall ensure proper drainage, minimize soil erosion, and preserve topsoil. This plan shall include clearing work, installation, and use and maintenance agreements associated with transportation needs.

Where possible, the ROW itself shall be used as an access road during the construction period. The FS may require that the access roads paralleling this pipeline be closed and vegetative cover re-established after pipeline construction is completed and not permit maintenance roads along the pipeline route. Roads to be permitted

Overland access may be specified in lieu of road construction or reconstruction.

All temporary roads shall be closed and areas restored without undue delay or maintained as specified in the ROW grant(s) or special use permit(s). Restoration to near original slope and contour, including redistribution of topsoil, would be to the satisfaction of the FS appropriate land management agency.

32. On federal lands, a specific trenching and excavated material stockpiling procedure shall be used on steep sloping and rough, broken terrain to ensure maximum minimum disturbance as outlined in the FS/BLM COM plan.

33. On federal lands, temporary work space areas used at highway and stream crossings and other special sites shall be restored to approximate pre-construction conditions and to the satisfaction of the FS/BLM.

34. ~~Chiseling shall be used, unless objected to by the FS/BLM, in federal range land areas to reduce compaction and improve soil permeability. Pitting and contour furrowing as directed by the FS/BLM shall be done on steeper slopes of disturbed areas to increase infiltration and to reduce runoff and erosion.~~ To reduce compaction and improve soil permeability in rangeland areas, the ROW shall be scarified or chiseled where needed. Contour furrowing, terracing, water barring, etc., as directed by the FS/BLM or landowners, shall be done on steeper slopes to increase infiltration and to reduce runoff and erosion.

3.1.4 Surface Water

General Impact: Increased surface runoff, erosion, and off-site sedimentation associated with ROW clearing, construction, operation and abandonment of the ROW.

35. The applicant shall develop and implement site-specific erosion control, revegetation, and stabilization plans as soon as possible to limit soil erosion and potential sediment input. This plan must be acceptable to the appropriate regulatory agency. In addition to this plan, an anti-degradation analysis of water quality should be undertaken to assure that the highest statutory and regulatory requirements and best management practices for pollutant controls are achieved.

36. The applicant shall minimize stream bank and streambed disturbance to the extent practicable. Construction impact should not exceed two weeks. Periods of low flow shall be utilized when crossing stream channels.

37. Construction across intermittent and perennial streams shall be done during periods of low or no flow where practicable. Stringent water quality control measures shall be utilized on crossings made during moderate to high flow periods.

38. After pipeline construction is completed, construction contractors shall stabilize disturbed areas promptly.

15. On Federal lands, temporary work space areas used at highway and stream crossings and other special sites shall be restored to appropriate pre-construction conditions and to the satisfaction of the FS/BLM.

16. Ephemeral channels shall be used only as necessary for temporary fording. Fording and construction in federal jurisdictional waters shall be restricted to periods of low flow or no flow. Fording and construction in federal jurisdictional waters shall be conducted in accordance with applicable Nationwide Permit conditions.

17. Construction across intermittent and perennial streams shall be done during periods of low or no flow where practicable. Sediment water quality control measures shall be utilized on crossings made during moderate to high flow periods.

18. After pipeline construction is completed, construction contractors shall stabilize disturbed areas promptly.

General Impact: The proposed measures for controlling or reducing impacts caused by the withdrawal and discharge of water used in hydrostatic testing would not ensure that the impacts would be reduced to acceptable, non-significant levels.

39. If required by state or Federal discharge permits, hydrostatic test water shall be tested and treated, as necessary, before release.

40. Hydrostatic test water shall be released in a controlled manner to reduce the potential for scour if discharged into natural waterways.

41. Water used in hydrostatic testing of the pipeline shall be discharged ~~into an appropriately designed retention pond prior to discharge into the environment~~ in accordance with local, state and federal (NPDES) permits. ~~Retention ponds shall be filled in and returned to pre-construction conditions after use.~~ If retention ponds are stipulated, the applicant will consult with the land managing agency or landowner to determine the disposition of the pond after construction.

42. No stream with an inadequate flow rate shall be used as a water source for hydrostatic testing, and adequate flow should be maintained for instream uses and downstream withdrawals. Consultation with the appropriate agency will be required to determine adequate stream flows.

43. Water for hydrostatic testing shall be reused wherever possible.

General Impact: Reduced water quality, increased sediment loading, and aggradation and degradation of stream channels due to channel bed disruption in response to constructing pipelines through channels.

44. The pipeline shall be buried at stream crossings below the estimated scour depths associated with a 100-year flood event. Where channel degradation during operation reduces the burial depth to less than the 100-year scour depth, ~~reburial of the pipeline to the proper depth shall be required~~ the applicant shall ensure the integrity of the pipeline through reburial to the proper depth wherever feasible. Where reburial is not practicable other methods such as installation of anchors and riprapping shall be employed.

45. Pipeline operators shall check the pipeline burial depth periodically at stream/channel crossings.

46. Coffer dams shall be ~~used for all perennial stream crossings with moderate to high sensitivities due to channel~~

~~gradient. They shall also be used to permit flow in one part of a stream while pipelaying construction occurs in another part~~ utilized where necessary and their specific use shall be determined based upon the analysis of specific stream crossings, detailed engineering design and consultation with the Army Corps of Engineers.

47. Stream crossings shall be made as perpendicular to the axis of the channel as possible.

48. Spoil from trench excavation shall be placed out of the stream on the banks at narrow stream crossings. Spoil shall be carefully placed downstream of the trench at wide crossings. Backfilling at streams shall be performed slowly to minimize agitation and increased sediment loading. Good quality backfill shall be placed in streams.

General Impact: Reduction in water quality due to fuel or chemical spillage, and impacts to surface water and groundwater resources during the construction and operation of the pipeline.

49. Chemicals, fuel, and lubricating oils shall not be stored near stream channels. Spill containments shall be installed or constructed around all chemical, fuel, and oil storage areas. Refueling and changing of lubricating oil shall not be done in or near stream channels, or where an accidental spill could run into a stream channel or shallow ground water zone. Any accidental spills shall be promptly cleaned up.

General Impact: Not all increased surface runoff, erosion, and off-site sedimentation would be reduced to acceptable, non-significant levels. Additional mitigation beyond the proposed would be required to further reduce these impacts.

50. Intensive surface runoff and erosion control shall be required beyond those proposed on steep slopes that would drain directly into streams. The applicant shall use sediment filters, closely spaced water bars, and erosion netting.

51. The applicant shall minimize ROW width to that absolutely necessary.

3.1.5 Groundwater

General Impact: Potential channeling of groundwater along the pipeline.

52. Bulkheads or ditch plugs shall be installed in the trench on slopes where necessary to minimize potential channeling.

General Impact: Effects on springs.

53. The applicant shall identify all nearby springs which serve as sources of water supply or are important to wildlife, evaluate potential effects of construction, and take appropriate precautions to ~~minimize any adverse effects~~ avoid impacts such as increased access to and use of springs by humans that could result in decreased use by wildlife.

3.1.6 Freshwater Biology

General Impact: Increased turbidity and sedimentation of aquatic habitats.

54. Where possible, the applicant shall work backhoes or draglines from the stream banks to trench any submerged stream crossings.

55. During construction on federal lands near streams or lakes, sedimentation basins and/or straw bale filters shall be constructed, as required by the FS/BLM.

General Impact: Disturbed stream banks would result in bank cutting and erosion.

56. Disturbed stream banks shall be restored by replacing topsoil and replanting native riparian species. Where appropriate and feasible, stream crossings will be fenced to ensure reclamation of riparian habitat. Fencing will be done on a site-specific basis in consultation with the appropriate state and federal land management authorities.

3.1.7 Terrestrial Biology

3.1.7.1 Vegetation

General Impact: Loss or disturbance of vegetation along the construction ROW.

57. The applicant shall design and implement site-specific revegetation plans according to the requirements and guidelines of the land management agency (BLM, USFWS, or FS), state agency or landowner. These plans shall include the necessary topsoil replacement, seedbed preparation, mulching, fertilization, use of seed mixtures containing native species, noxious weed control and additional erosion control. Generally the revegetation objective would be to return the disturbed area to a condition that would perpetuate previous land use. Guidelines established by the SCS shall be used where the pipeline would traverse private

land, and if it is agreeable to the owner. Periodic inspection of the ROW shall be conducted by the applicant and reclamation efforts enhanced where needed.

58. During construction in sensitive areas, the applicant shall clear the minimum ROW width possible and minimize ROW damage where possible (e.g. not stripping vegetation less than four inches in height, leaving trees standing and/or mowing taller vegetation as opposed to clearing, the last being particularly desirable in Mojavean shrub communities). This shall include local adjustment of pipeline alignment to avoid areas with high densities of sensitive plant species or sensitive communities. ~~(Class II impacts).~~

59. Existing ground cover such as grasses, leaves, brush, and tree trimmings shall be cleared and piled only to the extent necessary. Slash and limbs shall be piled and later shredded and chipped for use in restoration operations or disposed of as directed by the appropriate agency or landowner.

60. Trees and shrubs ~~on the ROW~~ that are not cleared shall be protected from damage during construction.

61. Trench backfilling operations shall be conducted in such a manner to minimize further disturbance of vegetation.

62. Joint inspection of the ROW by the company(ies) and the FS/BLM shall be conducted on federal lands to monitor the success and maintenance of erosion control measures and revegetation programs on native grazing lands for two growing seasons, or for a period determined by the FS/BLM. The monitoring program would identify problem areas and corrective measures to ensure vegetation cover and erosion control. Certification of successful revegetation and erosion control would be determined by the FS/BLM.

63. On federal lands, seed shall be planted by drilling, broadcasting, or hydroseeding. Drilling is the preferred method, because it is usually most successful.

- Drill seeding with a grass drill equipped with depth bands shall be used where topography and soil conditions allow operations of equipment to meet the seeding requirements of the species being planted.

- Broadcast seeding shall be used for inaccessible or small areas. Seed shall be covered by raking or harrowing.

- Hydroseeding would be done in critical areas determined by the FS/BLM.

64. Only species adapted to local soil and climatic conditions shall be used on federal lands. Generally, these would be native species. However, introduced species may be considered for specific conditions when approved by the FS/BLM. ~~Seeding rates in critical area plantings and generally throughout the ROW would be increased 100 percent over regular seeding rates to allow for seed mortality due to adverse growing conditions~~ Specific seeding rates shall be developed on an area-specific basis in consultation with reclamation specialists and jurisdictional agencies.

65. Testing of seed to be used on federal land will be conducted to meet state, federal, and agency seed requirements.

66. On federal lands, seeding shall be done when seasonal or weather conditions are most favorable and as determined by the FS/BLM.

67. Grazing on federal lands shall be delayed for a period directed by the FS/BLM to allow vegetation to become established, especially in highly erodible areas. Procedures for excluding grazing within the ROW should be subject to site specific analysis and/or negotiation with the land owner/land management agency and could involve protective fencing; removal of range animals from affected allotments, with compensation by the company(ies) to range permittees; adjustable grazing use schedules within allotments; etc. In the case of protective fencing, fences shall be constructed, maintained and removed by the company(s) according to FS/BLM specifications.

68. On federal land, the applicant shall preclear ~~mountain brush and tree covered areas~~ those areas containing merchantable timber prior to dozer or maintenance blade work. Preclearing would involve handwork or specialized equipment, i.e. mechanized shears, etc., in cutting of brush or trees with removal by proper equipment to designated areas. The applicant shall windrow all scalped and remaining large woody vegetation along the edge of the ROW.

General Impact: Loss of sensitive plant species individuals or habitat.

69. The applicant shall avoid, where feasible and necessary, locations of sensitive species and environmentally sensitive areas which include sensitive communities and known and suspected habitat of plant species of special concern. Specific information on sensitive areas shall be obtained by conducting field surveys along portions of the proposed route for individuals and habitat of species of concern and sensitive communities. Field surveys shall be

64. Only species adapted to local soil and climatic conditions shall be used on federal lands. Generally, these would be native species. However, introduced species may be considered for specific conditions when approved by the FS/BLM. Seeding rates will vary depending on the intended use, generally three pounds pure live seeds per acre. Seeding rates should be adjusted upward for poor seedbed conditions and for broadcast seeding. Specific seeding rates shall be developed on an area-specific basis in consultation with reclamation specialists and horticultural agencies.

65. Testing of seed to be used on federal land will be conducted to meet state, federal, and agency seed requirements.

66. On federal lands, seeding shall be done when seasonal or weather conditions are most favorable and as determined by the FS/BLM.

67. Grazing on federal lands shall be delayed for a period directed by the FS/BLM to allow vegetation to become established, especially in highly erodible areas. Procedures for excluding grazing within the ROW should be subject to site specific analysis and/or negotiation with the land owner/land management agency and could involve protective fencing; removal of range animals from affected allotments, with compensation by the company(ies) to range permittees; adjustable grazing use schedules within allotments; etc. In the case of protective fencing, fences shall be constructed, maintained and removed by the company(s) according to FS/BLM specifications.

68. On federal land, the applicant shall preclear vegetation--and--trees--covered--areas those areas containing merchantable timber prior to dozer or maintenance blade work. Preclearing would involve handwork or specialized equipment, i.e. mechanical shears, etc., in cutting of brush or trees with removal by proper equipment to designated areas. The applicant shall windrow all scalped and remaining large woody vegetation along the edge of the ROW.

General Impact: Loss of sensitive plant species individuals or habitat.

69. The applicant shall avoid, where feasible and necessary, locations of sensitive species and environmentally sensitive areas which include sensitive communities and known and suspected habitat of plant species of special concern. Specific information on sensitive areas shall be obtained by conducting field surveys along portions of the proposed route for individuals and habitat of species of concern and sensitive communities. Field surveys shall be

conducted during the appropriate time of year by a qualified botanist. Where feasible, pipeline alignment shall be adjusted to miss or minimize impacts ~~(Class II)~~ to identified individuals or habitats.

70. For areas supporting sensitive plant communities or plant species of special concern, the applicant shall restrict access onto the pipeline ROW where possible, by constructing barricades, fences with locked gates or by posting with signs.

71. Wetland and riparian vegetation impacted by construction or operation shall be replaced in kind.

72. Removal of certain sensitive plant species from the ROW may be a way to decrease impacts to certain plant species in California. If plants are removed, replanting shall occur in suitable habitat outside the zone of potential disturbance (construction and ORV use). Such sites shall be established in consultation with the appropriate land management agencies.

General Impact: The loss of plant species of special concern or species contained in sensitive communities due to pipeline construction when it is not feasible to avoid such areas containing these species.

73. ~~The applicant shall implement all mitigation measures formulated during formal consultation between the FERC staff and the USFWS pursuant to the Endangered Species Act.~~ The applicant shall conduct detailed surveys as directed by the appropriate governmental agencies to identify precise locations of species of special concern or species contained in sensitive communities. The applicant shall utilize survey results to avoid or alleviate impacts that would likely result in the loss of these species.

74. When it is not feasible to avoid areas containing plant species of special concern, the applicant shall attempt to transplant such perennial plant species back into the ROW after construction.

3.1.7.2 Wildlife

General Impact: Disturbance to any species of special concern and high interest species, such as big game animals and raptors during periods of high stress (i.e. times of migration, and breeding and/or rearing).

75. The applicant shall conduct a preliminary survey using a competent wildlife biologist to identify any raptor nests within the area of concern. All raptor nests found within

conducted during the appropriate time of year by a qualified botanist. Where feasible, pipeline alignment shall be adjusted to miss or minimize impacts (biomass-wise) to identified individuals or habitats.

70. For areas supporting sensitive plant communities or plant species of special concern, the applicant shall restrict access onto the pipeline ROW where possible, by constructing barricades, fences with locked gates or by posting with signs.

71. Wetland and riparian vegetation impacted by construction or operation shall be replaced in kind.

72. Removal of certain sensitive plant species from the ROW may be a way to decrease impacts to certain plant species in California. If plants are removed, replanting shall occur in suitable habitat outside the zone of potential disturbance (construction and ORV use). Such sites shall be established in consultation with the appropriate land management agencies.

General Impact: The loss of plant species of special concern or special contained in sensitive communities due to pipeline construction when it is not feasible to avoid such areas containing these species.

73. The applicant shall implement measures to identify sensitive plant species and communities prior to construction. The applicant shall conduct detailed surveys as directed by the appropriate environmental agencies to identify species locations at times of special concern, for species contained in sensitive communities. The applicant shall utilize survey results to avoid or minimize impacts that would likely result in the loss of these species.

74. When it is not feasible to avoid areas containing plant species of special concern, the applicant shall attempt to transplant such personal plant species back into the ROW after construction.

3.1.7.3 Wildlife

General Impact: Disturbance to any species of special concern and high interest species, such as big game animals and raptors during periods of high stress (i.e., times of migration, and breeding and/or rearing).

75. The applicant shall conduct a preliminary survey using a competent wildlife biologist to identify any raptor nests within the area of concern. All raptor nests found within

the ROW shall be avoided. Construction activities shall be scheduled so that they do not conflict with raptors nesting within 0.5 mile of the proposed alignment. The appropriate state or federal agency has guidelines defining calendar dates when activity should not occur for these species.

76. Impacts to high interest species could be sufficiently mitigated through scheduling construction activities so that they do not conflict with resident wildlife during times of high stress. The appropriate state or federal management agency has guidelines defining calendar dates when activity should not occur for the species in question. scheduling for construction may vary with the environment and climatological circumstances for any given year.

77. The applicant shall prohibit vehicle operation off the ROW by construction workers, including construction work and employee access, except where specified by the landowner or land management agency or where roads already exist.

78. Limit speed of vehicles along the ROW and access roads to 15 mph in sensitive habitats that support species of special concern with limited home ranges and mobility, e.g., the blunt-nosed leopard lizard and the desert tortoise. Construction and maintenance employees shall also be advised that care should be exercised when commuting to and from the project area to reduce road mortality.

79. Project related powerlines shall be designed to protect birds from electrocution and collision.

General Impact: Disturbance or loss of habitat necessary to sustain high interest wildlife species. This includes but is not limited to habitat utilized as courtship, nesting/rearing areas, and special habitat features such as water guzzlers, water tanks and springs.

80. The applicant shall revegetate all disturbed wildlife habitat deemed important to high interest species to predisturbance levels, following guidelines formulated by the appropriate governmental agencies.

General Impact: Loss of individuals of any species of special concern (federal and/or state listed or candidate species, BLM sensitive species). Disturbance that results in a reduction in recruitment to their populations.

81. The following 12 conservation measures were recommended by the U.S. Fish and Wildlife Service in their biological opinion on these projects. The 12 conservation measures apply only to those projects traversing the San Joaquin

Valley in California. As part of the formal consultation process between USFWS and FERC, the staff adopts these measures.

a) The pipeline alignment through the southern San Joaquin Valley shall be modified to reduce impacts to extant wildland habitats utilized by the San Joaquin kit fox, blunt-nosed leopard lizard, and giant kangaroo rat. Modification shall include maximizing pipeline siting and associated access routes, staging/laydown sites, structures, and other related facilities on currently intensively developed agricultural lands or other highly modified areas. The applicant(s) shall provide a supplemental biological assessment based on route re-alignment and field surveys to the U.S. Fish and Wildlife Service and Federal Energy Regulatory Commission for review and comment prior to construction. The subject report should clearly state the following: (a) alignment of the modified pipeline route; (b) survey methodologies and results, with detailed estimates of numbers of animals and sign observed and acreage of extant habitats of each species that will still be unavoidable impacts; (c) mitigation measures mandated for species/habitat protection; and (d) measures mandated for offsetting unmitigable on-site affects to these species. The specific route realignment and associated mitigation must be acceptable to the U.S. Fish and Wildlife Service and the Federal Energy Regulatory Commission staff. Concurrence from the U.S. Fish and Wildlife Service shall precede any construction within the geographic range of the San Joaquin kit fox, blunt-nosed leopard lizard, and giant kangaroo rat.

b) The pipeline alignment shall avoid, to the extent practical, habitats of the San Joaquin kit fox, blunt-nosed leopard lizard, and giant kangaroo rat.

c) Construction activities must be confined to a maximum 100-foot-wide corridor within habitat of the San Joaquin kit fox, blunt-nosed leopard lizard, or giant kangaroo rat. Where corridors in excess of this 100-foot-width may be disturbed, the applicant shall obtain concurrent from the U.S. Fish and Wildlife Service prior to initiation of construction.

Prior to construction, the applicant shall submit the following information to the U.S. Fish and Wildlife Service for review and comment:

- o proposed locations of all access roads, staging/ laydown areas, pumping stations, valve stations, and other ancillary facilities that are planned within extant habitats of the San Joaquin kit fox, blunt-nosed leopard lizard, and giant kangaroo rat;

- o results of preliminary surveys of these sites for the occurrence of listed species and their sign;

- o estimates of acreage of listed species habitats that will be adversely affected by proposed project actions; and

- o measures proposed to limit habitat disturbance and harm to listed species.

d) Construction shall take place in a manner that employs the following actions to reduce incidental take to listed species:

- o A biologist familiar with the habits of these species and their sign shall be present on-site during construction.

- o Construction shall utilize the minimum numbers and types of vehicles and equipment necessary on portions of the proposed alignment within listed species habitat.

- o Stockpiling of equipment and parking of vehicles shall be undertaken to the maximum extent possible on previously disturbed areas proximate to the construction zone.

- o Locations of San Joaquin kit fox dens and giant kangaroo rat burrow systems shall be prominently staked and flagged to decrease inadvertent destruction.

e) Maintenance activities within the project pipeline right-of-way that require the cross-country driving of vehicles or equipment or the removal of vegetation shall be limited to those actions required to effect repairs or for "emergency" situations where environmental or public health is placed at risk. Regular crushing or mowing of vegetation within the pipeline corridor crossing habitats utilized by the San Joaquin kit fox, blunt-nosed leopard lizard, or giant kangaroo rat is not authorized. Regular vehicle access along the proposed pipeline corridor within listed species habitats shall be limited to existing roads or to newly constructed access roads approved with the prior review and concurrence of the U.S. Fish and Wildlife Service.

f) Preconstruction surveys shall be required for all project-related construction activities that have the potential to result in the incidental taking of San Joaquin kit foxes and blunt-nosed leopard lizards. Planned locations of associated roads, staging/laydown sites, valve stations, pumping stations, and other related facilities within potentially occupiable habitats of one or more of these species must also be surveyed. Such surveys must be

conducted within 60 days from the planned start of construction. Locations of kit fox dens and giant kangaroo rat burrow systems shall be prominently marked and mapped during these surveys. Proposed project construction activities shall be modified to the extent possible to avoid destruction of all kit fox dens and giant kangaroo rat burrows identified. The proposed pipeline construction corridor must be adjusted to maintain a minimum 50-foot construction-free "buffer" from any San Joaquin kit fox dens or giant kangaroo rat burrows. Flagging and stakes identifying the locations of these sites shall be removed within 60 days of termination of construction activities.

g) In the event that a San Joaquin kit fox den or giant kangaroo rat burrow will be unavoidably destroyed by a planned project action, the following procedures shall be followed:

- o Prior to construction, the entrance(s) of the kit fox den or giant kangaroo rat burrow system shall be partially blocked with loose dirt for several days to discourage use while allowing any animals in residence to escape.

- o The partially blocked kit fox den or giant kangaroo rat burrow system shall then be excavated using hand tools either by a wildlife biologist or under the direct supervision of a wildlife biologist to ensure that no animals are trapped or injured. Animals discovered will be allowed to escape.

- o Excavated San Joaquin kit fox dens and giant kangaroo rat burrows shall be completely destroyed to prevent later use prior to on-set of construction.

- o Documentation of the San Joaquin kit fox den or giant kangaroo rat burrow loss shall be conveyed in writing to the U.S. Fish and Wildlife Service within five days of the date of den or burrow destruction.

- o If the subject den is a natal or pupping den, the applicant, prior to destruction of this den site, shall contact the U.S. Fish and Wildlife Service.

- o Where San Joaquin kit fox dens are destroyed from project-related actions, the applicant shall construct an equal number of artificial dens to partially offset lost predator-avoidance habitat. Selection of artificial den sites location and design shall be made by field biologists hired by the applicant in discussion with the U.S. Fish and Wildlife Service and California Department of Fish and Game staff.

conducted within 60 days from the planned start of construction. Impacts of kit fox dens and giant kangaroo rat burrow systems shall be progressively marked and mapped during these surveys. Proposed project construction activities shall be modified to the extent possible to avoid destruction of all kit fox dens and giant kangaroo rat burrows identified. The proposed pipeline construction corridor must be adjusted to maintain a minimum 50-foot construction-free "buffer" from any San Joaquin kit fox dens or giant kangaroo rat burrows. Staging and access identifying the locations of these sites shall be removed within 60 days of termination of construction activities.

a) In the event that a San Joaquin kit fox den or giant kangaroo rat burrow will be unavoidably destroyed by a planned project action, the following procedures shall be followed:

1) Prior to construction, the entrance(s) of the kit fox den or giant kangaroo rat burrow system shall be partially blocked with loose dirt for several days to discourage use but to allow any animals in residence to escape.

2) The partially blocked kit fox den or giant kangaroo rat burrow system shall then be excavated using hand tools either by a wildlife biologist or under the direct supervision of a wildlife biologist to ensure that no animals are trapped or injured. Animals discovered will be allowed to escape.

3) Excavated San Joaquin kit fox dens and giant kangaroo rat burrows shall be completely destroyed to prevent later use prior to on-set of construction.

4) Documentation of the San Joaquin kit fox den or giant kangaroo rat burrow loss shall be conveyed in writing to the U.S. Fish and Wildlife Service within five days of the date of burrow destruction.

5) If the subject den is a natal or pupping den, the provisions prior to destruction of this den site, shall contact the U.S. Fish and Wildlife Service.

6) Where San Joaquin kit fox dens are destroyed from project-related actions, the applicant shall construct an equal number of artificial dens to partially offset loss of predator-avoidance habitat. Selection of artificial den sites location and design shall be made by field biologists hired by the applicant in cooperation with the U.S. Fish and Wildlife Service and California Department of Fish and Game staff.

h) The applicant shall develop and implement a worker education program that addresses:

- o the occurrence and distribution of the San Joaquin kit fox, blunt-nosed leopard lizard and giant kangaroo rat within the project area;
- o measures being implemented to protect these species during project construction and subsequent maintenance activities; and
- o methods that individual employees can undertake to facilitate this process.

i) Any application of rodenticides within the geographic range of the San Joaquin kit fox and giant kangaroo rat for subsequent facility or road embankment maintenance to control California ground squirrels (Sphermophilus beecheyi) shall be limited to spot-treatment with zinc phosphide. NO rodenticides may be applied within a one-quarter-mile radius of known giant kangaroo rat burrow systems.

j) In the event of a pipeline rupture, the following measures shall be used to reduce incidental taking of the San Joaquin kit fox, blunt-nosed leopard lizard, and giant kangaroo rat:

- o The California Department of Fish and Game and U.S. Fish and Wildlife Service shall be immediately notified of any pipeline rupture, its specific location and extent, and measures underway for cleanup and pipeline repair.
- o Cleanup and restoration of the area affected by the pipeline rupture shall include:
  - immediate containment, using constructed earthen berms or other means to contain the damage to the smallest possible area;
  - utilizing biologists familiar with these species to locate and flag San Joaquin kit fox dens, giant kangaroo rat burrows or other especially sensitive areas for avoidance by cleanup equipment, and to inventory the impacted area for entrapped or injured wildlife, effecting rescue where possible;
  - removal of contaminants and contaminated soils for safe off-site disposal in an expeditious fashion; and
  - recontouring and restoring the affected area, including utilizing vegetation restoration techniques, until equal to pre-impact condition.

k) If the established limit of incidental take of any federally-listed species is exceeded, the causative action shall cease and consultation shall be reinitiated within five working days of the most recent mortality.

l) The U.S. Fish and Wildlife Service is to be notified within three working days of the finding of any endangered species found dead during this project. Any San Joaquin kit foxes, blunt-nosed leopard lizards, or giant kangaroo rats found dead or injured shall be turned in to the California Department of Fish and Game.

82. The applicant shall conduct detailed surveys prior to construction as directed by the appropriate governmental agencies in order to identify precise locations of viable populations. Surveys shall be conducted at the appropriate season and time to ensure that targeted species can be enumerated. The applicant shall utilize survey results to avoid or alleviate impacts that would likely result in the loss of individuals of species of special concern.

83. In San Joaquin kit fox habitat, establish temporary artificial barriers 35-50 feet from washes to minimize potential chemical contamination from surface runoff.

84. Construction activities for threatened or endangered species shall be timed so as not to conflict with crucial time periods such as hibernation. This would apply to the blunt-nosed leopard lizard but not to the desert tortoise where construction during hibernation is desired.

85. ~~In areas potentially occupied by desert tortoise, the following mitigation methodology developed by Reyes-French [1985] shall be adopted. Conduct a pre-construction survey to delineate areas of desert tortoise concentrations. Limit construction activities in these areas to the hibernation period between October 30 and March 1 in Arizona. Employ qualified tortoise biologists to conduct tortoise searches within the impacted area immediately before construction so that hibernating individuals may be removed from the path of construction. Have a desert tortoise expert on the site during the construction phase. Remove any active tortoises ahead of the construction equipment. Hibernating tortoises removed from the construction area shall be kept over the winter at an appropriate facility under specified artificial environmental conditions. These individuals shall be released the following spring in the immediate vicinity of their capture. Injured or dead tortoises shall be handled and/or disposed of according to Memorandum of Understanding with the California Department of Fish and Game or other appropriate agencies. These measures would not be required of Northwest since no desert tortoise habitat would be present.~~ In areas potentially occupied by desert tortoise,

the following mitigation methodology modified from Reyes-French [1985] shall be adopted. Conduct preconstruction surveys to delineate areas of construction activities. Within potential desert tortoise habitat, construction procedures shall be restricted to tortoise hibernation periods. This construction window would be 1 October to 1 April in the eastern Mojave Desert of California, Nevada and Utah; 15 October to 1 March in the western Mojave Desert of California; and 30 October to 1 March in Arizona. A competent tortoise biologist will survey the route and other areas of potential disturbance immediately in advance of construction and remove active and/or hibernating tortoises to a site outside the ROW. A competent biologist will return the tortoises to capture points after surface disturbances have been completed. A competent tortoise biologist will also be on-site during any flushing or hydrostatic testing to prevent loss or injure to individuals. Injured or dead tortoises will be handled and/or disposed according to Memorandum of Understanding with state fish and game agencies and the U.S. Fish and Wildlife Service. Any Arizona tortoises found injured or dead shall be surrendered to the Arizona Game and Fish Department. Barriers and signs will be placed along the ROW to inhibit use of the ROW as an off-road vehicle road or trail. All construction vehicles and equipment will be restricted to the ROW to limit tortoise habitat degradation. Construction personnel will be informed of the sensitive nature of this species and the prohibitions against vandalism and removal of individuals. These measures would not be required of Northwest since no desert tortoise habitat would be present.

86. ~~Limit the length and duration of open trenches. Open trenches shall be limited in length to 0.25 mile and duration of open segments shall not exceed three days. Before backfilling, the trench shall be inspected for trapped animals. All such animals shall then be released in the same general locality, but beyond the area of disturbance.~~ The length and duration of open trenches shall be kept to the minimum extent feasible. Limiting the length and duration of open trenches in areas of sensitive species shall be developed on a site-specific/species-specific basis. The amount of open ditch and duration of open ditch in areas of sensitive species shall be governed by cooperation of applicants and appropriate land management/wildlife agencies. Before backfilling, the trench shall be inspected for trapped animals. All such animals shall then be released in the same general locality, but beyond the area of disturbance.

87. Trenches shall be inspected daily for species of special concern that might have fallen into the trenches. Any species of special concern found should be handled in

accordance with prearranged agreements with the appropriate agencies.

88. Access to the ROW shall be restricted wherever feasible by constructing barricades, fences with locked gates at road intersections, and by posting signs. State wildlife agencies, as well as federal agencies, shall be consulted to help identify and establish wildlife management areas. Vehicle access (except for administrative purposes) to these areas shall be restricted. On federal land, as directed by the Forest Service/BLM, temporary and/or permanent structures shall be installed at specific locations along the ROW and other disturbed sites to prevent off-road vehicle access.

General Impact: Loss or disturbance of habitat utilized by species of special concern. This includes any designated critical habitat of proposed or listed threatened or endangered species, or loss or disturbance of greater than one percent of habitat supporting a viable population of species of special concern.

89. The applicant shall conduct field surveys as directed by the appropriate governmental agencies to identify ~~environmentally sensitive areas, such as nest sites, winter roosts, or~~ habitat that supports viable populations of species of special concern. The applicant shall avoid these areas where possible.

90. All disturbed designated critical habitat and habitat suitable for species of special concern shall be revegetated to predisturbance levels following guidelines formulated ~~by~~ in consultation with the appropriate governmental agencies.

91. Public access into habitat of species of special concern shall be controlled by restricting access onto pipeline ROW's where possible by constructing barricades, fences with locked gates, or by posting with signs. This will be required for all wildlife management areas identified and/or established by both state and federal wildlife agencies.

3.1.7.3 Grazing

General Impact: Broken fences and disruption of natural and artificial barriers to livestock needed to maintain separation and control of livestock.

92. The applicant shall repair fences and maintain livestock separation and control devices such as cattleguards, gates, drift fences and natural barriers to equal the

effectiveness of the existing control structures prior to pipeline construction or operation.

93. The applicant shall replace any water lines or drinkers damaged as a result of pipeline construction.

3.1.8 Socioeconomics

General Impact: The presence of construction workers may impact tourism and the availability of temporary housing.

94. Construction of the pipeline shall be scheduled to avoid peak tourist seasons in the affected area if possible. ~~Other construction timing stipulations shall avoid peak tourist seasons.~~

95. In rural areas, workers should consider housing and services in larger, more distant communities. Project employees may be able to travel to and from construction areas together. ~~Implementation of this measure would concentrate project related housing demands in developed areas where accommodations are available, thus alleviating pressures on small communities and reducing individual commuting time.~~

96. To further mitigate housing impacts in rural areas or in crowded tourist areas, workers should try to reside in temporary trailer camps. ~~Implementation of this measure would permit small communities with limited services to benefit from employee expenditures for food and supplies while residing in their own temporary accommodations.~~

97. The applicant shall comply with all applicable federal and state laws and regulations concerning the use of pesticides (i.e., insecticides, herbicides, fungicides, rodenticides, and other similar substances) in all activities and operations. The applicant would obtain approval from the applicable agency prior to the use of such substances. The plan would provide the type and quantity of the material to be used; the pest, insect, fungus, etc., to be controlled; the methods of application; the location of storage and disposal of containers; and other information that the agency may require. The plan would be submitted no later than December 1 of any calendar year that covers the proposed activities for the next fiscal year (i.e., December 1, 1986, deadline for a fiscal year 1988 action). If the need for emergency use of pesticides is identified, the use must be approved. The use of substances on or near the ROW and temporary permit areas shall be in accordance with the approved plan. A pesticide would not be used if the Secretaries of the Interior and Agriculture have prohibited its use. A pesticide would be used only in accordance with its registered uses and with the

effectiveness of the existing control structures prior to pipeline construction or operation.

93. The applicant shall replace any water lines or drainage damaged as a result of pipeline construction.

3.1.8 Socioeconomics

General Impact: The presence of construction workers may impact tourism and the availability of temporary housing.

94. Construction of the pipeline shall be scheduled to avoid peak tourist seasons in the affected area if possible. Other construction-related activities shall avoid peak tourist seasons.

95. In rural areas, workers should consider housing and services in larger, more distant communities. Project employees may be able to travel to and from construction areas together. Implementation of this measure would conserve gasoline, reduce housing demands in developed areas where accommodations are available, thus relieving pressure on small communities and reducing individual commuting miles.

96. To further mitigate housing impacts in rural areas or in crowded tourist areas, workers should try to reside in temporary trailer camps. Implementation of this measure would provide social contacts with similar persons, benefit those employed in providing food and supplies while residing in their temporary encampments.

97. The applicant shall comply with all applicable federal and state laws and regulations concerning the use of pesticides (i.e., insecticides, herbicides, fungicides, rodenticides, and other similar substances) in all activities and operations. The applicant would obtain approval from the applicable agency prior to the use of such substances. The plan would provide the type and quantity of the material to be used the pest, insect, rodent, etc., to be controlled the methods of application, the location of storage and disposal of containers, and other information that the agency may require. The plan would be submitted no later than December 1 of any calendar year that covers the proposed activities for the next fiscal year (i.e., December 1, 1989, deadline for a fiscal year 1990 action). If the need for emergency use of pesticides is identified, the use must be approved. The use of substances on or near the ROW and temporary access areas shall be in accordance with the approved plan. A pesticide would not be used if the Secretaries of the Interior and Agriculture have prohibited its use. A pesticide would be used only in accordance with its registered uses and with the

Secretarial limitations. Pesticides shall not be permanently stored on federal lands.

98. All structures such as terraces, levees, underground drainage systems, irrigation pipelines, and canals shall be restored to preconstruction conditions so that they would function as originally intended.

99. Gates on established roads on National Forest System lands shall not be locked or closed by the applicant.

100. Permittees and other regular users of National Forests affected by construction of the project(s) shall be notified in advance of any construction activity that might affect their businesses or operations. This would include but not be limited to temporary road closures, removal and/or cutting of fences, disturbances to range improvements or other range use-related structures.

101. Garbage, toxic substances and other refuse shall be disposed of in an authorized disposal site or landfill.

3.1.9 Land Use

General Impact: Conflict with land use.

102. Technical assistance and approval of written plans for National Forest System lands shall be obtained from the Forest Service prior to any construction.

103. All existing improvements under federal management or permit shall be protected and damage repaired immediately.

104. Forest Service approval shall be required for locating sites for equipment storage, pipe storage, and staging areas on National Forest System lands. A site preparation plan would be required for these sites, as part of the COM plan.

105. A fire control plan shall be prepared as part of the COM plan for the Forest Service.

3.1.10 Cultural Resources

3.1.10.1 Archaeology

General Impact: Disturbance to cultural resources could occur along the proposed routes.

106. Based on the Cultural Resource Technical Report, the regulations at 36 CFR Parts 61.2, and the new ACHP regulations at 800.4 (a) (ii) and 800.4 (b) published in the Federal

Secretarial limitations. Permittees shall not be permanently stored on federal lands.

98. All structures such as terraces, levees, underground drainage systems, irrigation pipelines, and canals shall be restored to preconstruction conditions so that they would function as originally intended.

99. Gates on established roads on National Forest System lands shall not be locked or closed by the applicant.

100. Permittees and other regular users of National Forests affected by construction of the project(s) shall be notified in advance of any construction activity that might affect their businesses or operations. This would include but not be limited to temporary road closures, removal and/or cutting of fences, disturbances to range improvements or other range use-related structures.

101. Garbage, toxic substances and other refuse shall be disposed of in an authorized disposal site or landfill.

3.1.9 Land Use

General Impact: Conflict with land use.

102. Technical assistance and approval of written plans for National Forest System lands shall be obtained from the Forest Service prior to any construction.

103. All existing improvements under federal management or permit shall be protected and damage repaired immediately.

104. Forest Service approval shall be required for locating sites for equipment storage, pipe storage, and staging areas on National Forest System lands. A site preparation plan would be required for these sites, as part of the CON plan.

105. A fire control plan shall be prepared as part of the CON plan for the Forest Service.

3.1.10 Cultural Resources

3.1.10.1 Archaeology

General Impact: Disturbance to cultural resources could occur along the proposed routes.

106. Based on the Cultural Resource Technical Report, the regulations at 36 CFR Parts 61.7, and the new ACHP regulations at 800.4 (a) (1) and 800.4 (b) published in the Federal

Register on September 2, 1986 (51 FR 31115), the applicant(s) receiving FERC certification shall contact the appropriate SHPO(s) for assistance in evaluating additional information resources which should be consulted and their recommendations for further surveys to enable the certificated applicant(s) to ~~assess~~ form their opinion as to the eligibility of those properties currently identified in the Technical Report and identify any additional eligible or National Register properties. The certificated applicant(s) shall consult these resources and furnish the results of the assessment along with the SHPO's recommendations for field surveys to the FERC staff. The FERC, the SHPO(s), and other appropriate agencies will consult to determine the adequacy of all previous field surveys which cover portions of the certificated pipeline route and sites of appurtenant facilities, and may require further surveys on inadequately inventoried lands.

A cultural resource management plan shall then be designed by the applicant in consultation with the FERC, the SHPO(s), and other appropriate agencies including, on federal lands, BLM, the Forest Service, Bureau of Indian Affairs, and the Fish and Wildlife Service, as necessary. The management plan would outline procedures and methods to identify, evaluate, and protect (i.e., through avoidance or scientific data recovery) National Register and eligible properties. Appropriate research questions shall be included in the plan, although others may develop as the field investigation studies proceed. Guidelines for mitigation of impacts to resources that are not avoidable shall be included in the cultural resource management plan.

Consideration shall be given to a monitoring program for ground-disturbing activities in areas where cultural resource inventory indicates a likelihood that resources not now evident on the ground surface are likely to occur as buried resources. Such an "emergency discovery" program shall be consistent with the ACHP regulations at 36 CFR Parts 800.5 and 800.11 (a).

Prior to project construction, but after the formulation of the management plan, the applicant shall design and conduct an intensive cultural resource survey of the final pipeline route and ancillary facilities, where necessary, that is equivalent to a BLM Class III pedestrian survey. This survey shall be done in consultation with appropriate Native American groups to help identify resources of traditional Native American value.

Upon completion of the field surveys, the applicant shall identify for the FERC and appropriate SHPO(s) all cultural properties potentially affected by the undertaking, and how each property addresses either the research questions in the management plan, or other National Register criteria of

eligibility, and the applicant's opinion of the effect of the project on any properties. Once properties are properly identified and recorded, the FERC staff, in consultation with the SHPO(s), shall identify National Register properties by applying the National Register criteria of eligibility in light of the research questions developed for the management plan, new research questions inherent in the data, or other criteria under 36 CFR 60.4. Additional information concerning the resources shall be obtained by the applicant if required by the FERC staff to apply those criteria.

Cultural resources determined eligible for inclusion in the National Register ~~shall~~ by the FERC or other authorizing agencies would then be evaluated as to the impacts of the project. A determination of effect shall be made by the FERC staff in consultation with the appropriate SHPO(s) pursuant to 36 CFR Part 800.5. Indicators for determining the potential effect of construction on cultural resources are set forth in the ACHP regulations at 36 CFR Part 800.9.

If it is determined that effects upon National Register or eligible properties would occur as a result of the project, a mitigation plan to reduce or eliminate these effects shall then be formulated. Site-specific mitigation plans shall be formulated in accordance with the appropriate provisions of the management plan. Any modification of the management plan deemed necessary in light of discoveries made during the field surveys shall also be identified. The mitigation plans shall discuss the timetables for completion of the final report for the phases of mitigation associated with data recovery, laboratory analyses and artifact curation. The final report shall document the method, theory, and results of implementing the mitigation plans. The final report shall be submitted to the FERC and the appropriate SHPO(s) upon completion in accordance with the identified timetables.

If properties on or eligible for the National Register would be affected, the FERC shall afford the ACHP an opportunity to comment on the effects of the project and the proposed mitigation plans.

Until the FERC staff has informed the applicant(s) in writing that the ACHP has provided the FERC with its comments pursuant to Section 106 of the National Historic Preservation Act and the applicant(s) has agreed to any modifications of the mitigation plan which the ACHP and the FERC staff have agreed upon, the applicant(s) may not proceed with implementation of the mitigation plans or with construction.

3.1.10.2 American Indian Concerns

107. Tribal plans for cultural resource preservation shall be followed on tribal lands. In general, sacred and archaeological sites shall be avoided whenever possible, burials shall be left undisturbed, and care shall be taken to avoid the destruction of traditionally used plants and animals. Artifacts recovered from archaeological excavation shall be returned to the tribe if found on tribal lands.

3.1.11 Paleontological Resources

General Impact: Loss or disturbance of paleontological resources could occur along the pipeline route.

108. The applicant shall implement the following measures to avoid or mitigate potentially adverse effects to paleontological resources resulting from construction of the proposed project that shall be implemented by the applicant in consultation with the appropriate resource management agencies. Implementation of this program should reduce damage to, or destruction of, significant fossils as a result of bedrock disturbances during construction operations. This program shall include pre-construction measures and monitoring of sensitive areas during construction operations.

Pre-Construction. After consultation with the appropriate resource management agency, those areas identified as being of high paleontological sensitivity shall be examined prior to construction to determine the precise nature and location of fossils previously discovered within one mile of the pipeline route. Attention shall be directed toward identifying sections of these corridors where construction would result in bedrock disturbance adjacent to localities known to yield significant fossils. An initial pre-construction evaluation shall be made by comprehensively reviewing pertinent published paleontological literature, museum fossil locality records, and by requesting additional locality data from paleontologists who are engaged in active research in these areas.

A pre-construction surficial field inventory may then be recommended for those parts of the 100-foot wide pipeline construction right-of-way where disturbance of fossils may occur. The purpose of this inventory would be to evaluate in more detail the significance of local fossils by identifying the fossil types present, ascertaining their quality of preservation, and determining more precisely their extent and distribution. At some localities, small shallow trenches may be excavated to facilitate these observations.

If it is found that significant fossils could be adversely affected, appropriate site-specific mitigation measures shall be designed. These measures may include the controlled scientific removal of fossils that would otherwise be damaged or destroyed during construction. Any such removals shall be made by professional paleontologists authorized by the appropriate federal, state, and county collecting permits. In accordance with these permits, all fossils shall be placed in appropriate repositories, with records of their precise locality, and descriptions of the geological and faunal context of each. This survey shall also determine whether additional mitigation measures should be implemented during construction activities.

Construction. Mitigation measures that may be implemented during construction shall include monitoring construction activities in which bedrock would be disturbed. This may entail inspection of cleared and graded sections of the corridor before trenching, and inspection of the rock excavated from the trench. ~~before the burial of the pipe.~~

Procedures shall be established and approved by permitting agencies for temporarily halting or redirecting construction if fossil accumulations are encountered during construction. An approved paleontologist, contracted to implement the management plan, shall be notified immediately upon encountering a chance fossil find so that the significance of the find can be evaluated efficiently and, if necessary, mitigation actions taken.

If significant fossils are encountered during construction, their controlled scientific removal from the construction site may be necessary. Removal of fossils discovered during construction shall be implemented by professional paleontologists in accordance with professionally recognized standards.

3.1.12 Visual Resources

General Impact: Degradation of visual resources could occur along the pipeline route.

109. The applicant shall implement three generic types of mitigation techniques: 1) strategic location, 2) minimization of disturbance, and 3) repetition of basic landscape elements (form, line, color, texture). Mitigation recommendations described below, based on these techniques, will reduce visual contrasts of the project facilities.

Construction. During construction, clearing of land for facilities or structures should create curvilinear boundaries instead of straight lines and minimize marring and scarring of the landscape to the greatest practical

extent. Grading shall be done in a manner which will minimize erosion and conform to the natural topography [USFS, 1977].

Cleared brush or small trees not otherwise disposed of shall be piled in a way that provides cover habitat for small mammals, reptiles, and birds. Such brush piles shall be screened from public view to the greatest practical extent [Robinette, 1973].

Soil and rocks that are excavated during construction and not used shall be evenly backfilled into the cleared area or removed from the site. Soil and rocks shall be graded to conform with the terrain and the adjacent land.

Compressor Stations: The colors selected for the compressor stations, and other structures and facilities shall be based on the following considerations [Robinette, 1973]:

- The colors shall be uniform and noncontrasting to blend with the immediate natural environment. The warmest color tones are appropriate for natural settings.
- Exposed concrete shall be tinted to match the soil color.
- Colors shall be selected on the basis of their ability to blend with both the sky and the environment in which they are being used.
- Colors that reflect adjacent colors by including them are most successful in adapting to their environment and shall be utilized.
- Colors approved in the Munsell Soil Color Coding System and displayed on the Standard Environmental Color Chart shall be considered.
- The applicant prepare a plan to minimize visual impacts from structures. If required, the applicant would prepare photographic simulations of areas in which facilities are proposed within foreground-middleground areas of high scenic value or sensitivity. Using the simulation as a guide, the applicant would design and locate the pipeline route and ancillary structures to blend into the existing environment. On federal lands, the BLM/FS would evaluate and approve measures before construction begins.

extent. Grading shall be done in a manner which will minimize erosion and conform to the natural topography [USFS, 1977].

Cleared brush or small trees not otherwise disposed of shall be piled in a way that provides cover habitat for small mammals, reptiles, and birds. Such brush piles shall be screened from public view to the greatest practical extent [Robinette, 1973].

Soil and rocks that are excavated during construction and not used shall be evenly backfilled into the cleared area or removed from the site. Soil and rocks shall be graded to conform with the terrain and the adjacent land.

Compressor Stations: The colors selected for the compressor stations, and other structures and facilities shall be based on the following considerations [Robinette, 1973]:

- The colors shall be uniform and noncontrasting to blend with the immediate natural environment. The warmest color tones are appropriate for natural settings.
- Exposed concrete shall be tinted to match the soil color.
- Colors shall be selected on the basis of their ability to blend with both the sky and the environment in which they are being used.
- Colors that reflect adjacent colors by including them are most successful in adapting to their environment and shall be utilized.
- Colors approved in the Munsell Soil Color Coding System and displayed on the Standard Environmental Color Chart shall be considered.
- The applicant prepare a plan to minimize visual impacts from structures. If required, the applicant would prepare photographic simulations of areas in which facilities are proposed within foreground-middleground areas of high scenic value or sensitivity. Using the simulation as a guide, the applicant would design and locate the pipeline route and ancillary structures to blend into the existing environment. On federal lands, the BLM/FS would evaluate and approve measures before construction begins.

Overhead Electrical Powerline to Compressor Stations:

- Towers or poles shall be placed strategically to make maximum use of existing topography and vegetation for screening.

- Electrical powerlines shall be located at the base of slopes when feasible to provide a background of topography and/or natural cover.

- Materials used to construct towers or poles shall harmonize with the natural surroundings. Where natural wood poles are appropriate, the color range should be limited to present unified series of poles.

- Choice of conductor material shall be carefully considered to avoid sheen or a strong silhouette and to provide blending of the conductors into any given setting through which the line must pass.

- When lines are adjacent to roads, guyed towers shall be avoided whenever possible.

Landscape-type Measure

Grading and earthwork:

- Minimize routing pipeline along prominent ridgelines.

Forested Areas. Several different types of forest ecosystems are encountered at the higher elevations along the various loops and although they have differing species, they can be treated uniformly and the mitigation measures are virtually identical.

- Leave trees as close to the downhill side of the ROW as possible,

- Create as few landings and turnouts as possible, and do not locate them on the noses of ridges or exposed slopes,

- Avoid grade changes as much as possible,

Distance Zone Measures

Foreground View. A foreground view is determined to be the detailed view from between 0 to 1/4-1/2 mile from the viewer. Visual impact appearing in a foreground view shall be obscured, concealed, or disguised through screening or controlling access to views.

Overhead Electrical Powerlines to Compressor Stations:

- Towers or poles shall be placed strategically to make maximum use of existing topography and vegetation for screening.

- Electrical powerlines shall be located at the base of slopes when feasible to provide a background of topography and/or natural cover.

- Materials used to construct towers or poles shall harmonize with the natural surroundings. Where natural wood poles are appropriate, the color range should be limited to present unfilled series of poles.

- Choice of conductor material shall be carefully considered to avoid sheen or a strong silhouette and to provide blending of the conductors into any given setting through which the line must pass.

- When lines are adjacent to roads, guyed towers shall be avoided wherever possible.

Landscape-type measure

Grading and earthworks:

- Minimize routing pipeline along prominent ridgelines.

Forested Areas. Several different types of forest occupations are encountered at the higher elevations along the various loops and although they have differing species, they can be treated uniformly and the mitigation measures are virtually identical.

- Leave trees as close to the downhill side of the ROW as possible.

- Create as few landings and turnouts as possible, and do not locate them on the nose of ridges or exposed slopes.

- Avoid grade changes as much as possible.

Distance Zone Measures

Foreground View. A foreground view is determined to be the detailed view from between 0 to 1/4-1/2 mile from the viewer. Visual impact occurring in a foreground view shall be obscured, concealed, or disguised through screening or controlling access to views.

Middleground and Background View. Views beyond 1/2 mile shall be mitigated by revegetation techniques to blend the impact back into the surrounding environment, utilizing landscape texture, color, and pattern to subordinate the impact and soften the edges.

Performance Measures

In order to meet BLM VRM and FS VQO goals, certain time limitations shall be established within which mitigation measures must occur to reduce visual impacts upon the existing environment.

110. The COM plan shall include an identification of segments of the pipeline ROW on federal lands where vegetative clearing widths would be modified, i.e., feathered or undulated. This would be done to maintain the visual quality objectives of the respective National Forest Land and Resource Management Plan.

3.1.13 Staff Recommended Mitigation Measures for the Mojave Proposal

Geology

General Impact: Volcanic activity may cause damage to the pipeline.

111. The volcanic cinder cones near Amboy and Hector shall be investigated to estimate the potential of an event that would affect the Mojave Mainline and allow for contingency planning.

Terrestrial Biology

Vegetation:

112. Mojave shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to the start of construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

Land Use

113. Mojave shall realign its route to maximize use of existing corridors in the CDCA. The applicant shall use Alternative B as modified by the El Dorado route around Barstow. The route shall also be realigned to avoid Edwards Air Force Base by using Kern River's mainline route in this area.

114. Mojave shall realign its route between the town of Mojave and the floor of the San Joaquin Valley to avoid Tehachapi Mountain Park, the community of Stallion Springs, and the Chanac Creek drainage. This can be accomplished by using either the proposed Kern River or El Dorado routes in this area.

115. Mojave shall cross the Kern River at the location identified for the North Bakersfield Variation to Kern River's proposed project to avoid major impact to Kern River County Park.

System Safety and Reliability

116. Aircraft monitoring of the pipeline ROW for operation and maintenance purposes shall be coordinated with nearby military installations, e.g., Edwards AFB, in order to avoid potential conflict.

117. The residential areas of Indian John Spring and Stallion Springs shall be avoided by rerouting the pipeline corridor. These areas are particularly sensitive since potentially active faults are crossed in this area.

118. The route through Bakersfield shall be carefully selected to avoid or minimize impact on areas zoned residential or recreational.

3.1.14 Staff Recommended Mitigation Measures for the El Dorado Alternative

Geology

General Impact: Volcanic activity may cause damage to the pipeline.

119. The volcanic cinder cones near Amboy and Hector shall be investigated to estimate the potential of an event that would affect the El Dorado Mainline ~~and Alternative A.~~ and allow for contingency planning.

Terrestrial Biology

Vegetation:

120. El Dorado shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to the start of construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

114. Mojave shall realign its route between the town of Mojave and the floor of the San Joaquin Valley to avoid Tehachapi Mountain Park, the community of Stallion Springs, and the Chanac Creek drainage. This can be accomplished by using either the proposed Kern River or El Dorado routes in this area.

115. Mojave shall cross the Kern River at the location identified for the North Bakersfield Variation to Kern River's proposed project to avoid major impact to Kern River County Park.

System Safety and Reliability

116. Aircraft monitoring of the pipeline ROW for operation and maintenance purposes shall be coordinated with nearby military installations, e.g., Edwards AFB, in order to avoid potential conflict.

117. The residential areas of Indian Dunn Spring and Stallion Springs shall be avoided by rerouting the pipeline corridor. These areas are particularly sensitive since potentially active faults are crossed in this area.

118. The route through Bakersfield shall be carefully selected to avoid or minimize impact on areas zoned residential or recreational.

3.1.14 Staff Recommended Mitigation Measures for the El Dorado Alternative

Geology

General Impact: Volcanic activity may cause damage to the pipeline.

119. The volcanic cinder cones near Amboy and Hector shall be investigated to estimate the potential of an event that would affect the El Dorado Pipeline and Alternative and allow for contingency planning.

Terrestrial Biology

Vegetation:

120. El Dorado shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to the start of construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

Land Use

121. El Dorado shall realign its route to avoid Edwards AFB by using Kern River's proposed route in the area.

System Safety and Reliability

122. Aircraft monitoring of the pipeline ROW for operation and maintenance purposes shall be coordinated with nearby military installations, e.g., Edwards AFB, in order to avoid potential conflict.

123. The route through Bakersfield shall be carefully selected to avoid or minimize impact on areas zoned residential or recreational.

3.1.15 Staff Recommended Mitigation Measures for the El Paso Proposal

Geology

124. The volcanic cinder cones present, if one of the alternative cases is certificated, northwest of Flagstaff, Arizona, shall be investigated to estimate the potential of an event that could affect the El Paso Expansion and allow for contingency planning.

Terrestrial Biology

Vegetation:

125. El Paso shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

Land Use

126. The El Paso 100/500 or 200/400 alternatives would cross the Elden Environmental Study Area along the 4.1 miles of the Leupp loop west of the Flagstaff Compressor Station. This area shall be avoided by eliminating that section of the loop by appropriate engineering design, either by relocation or increased compression.

Cultural Resources

American Indian Concerns:

127. The Navajo Nation has well-developed policies with regard to archaeological and sacred sites and the disposition of burials. They require a complete inventory of archaeological and sacred sites along the proposed expansion loops. Such an inventory will require both a pedestrian survey of the construction corridor and facility areas as well as interviews with local residents (land-users) and medicine men to fully document the presence of sacred sites. Some of these sites are already on record in local BIA offices. Burials, if encountered, must be identified if possible, and avoided whenever feasible. Reburial is possible when certain conditions are met, however. Archaeological excavation requires a permit from the Navajo Nation. In addition, the various chapters of the Navajo Nation wish to have a voice regarding which side of the original pipeline the proposed expansion loops would be laid. El Paso shall follow the requirements of the Navajo Nation.

3.1.16 Staff Recommended Mitigation Measures for the Northwest Project

Geology

128. No surface disturbance will be allowed within 100 feet of perennial streams within the Grand Junction Resource Area.

Terrestrial Biology

Vegetation:

129. For the protection of the federally listed species, Uinta Basin hookless cactus and spineless hedgehog cactus, the following actions should be undertaken:

- o Prior to construction, the right-of-way, staging areas, and new access roads shall be staked and surveyed for the subject species by conducting field surveys by qualified botanists during the appropriate time of year.
- o Individual plants, populations, and habitat identified adjacent to the staked right-of-way, staging areas, and access roads shall be flagged and signed to alert construction workers to avoid these sensitive areas.
- o Pipeline right-of-way alignment, staging areas, and access roads shall be adjusted to avoid individual plants or habitat of the subject species.

Cultural Resources

American Indian Concerns:

127. The Navajo Nation has well-developed policies with regard to archaeological and sacred sites and the disposition of burials. They require a complete inventory of archaeological and sacred sites along the proposed expansion loops. Such an inventory will require both a pedestrian survey of the construction corridor and facility areas as well as interviews with local residents (land-users) and medicine men to fully document the presence of sacred sites. Some of these sites are already on record in local BIA offices. Burials, if encountered, must be identified if possible, and avoided whenever feasible. Removal is possible when certain conditions are met, however. Archaeological excavation requires a permit from the Navajo Nation. In addition, the various chapters of the Navajo Nation plan to have a voice regarding which side of the original pipeline the proposed expansion loops would be laid. El Paso shall follow the requirements of the Navajo Nation.

3.1.16 Staff Recommended Mitigation Measures for the Northwest Project

Geology

128. No surface disturbance will be allowed within 100 feet of perennial streams within the Grand Junction Resource Area.

Terrestrial Biology

Vegetation:

129. For the protection of the federally listed species, Ute ladies'-tresses and Mancos milkvetch, the following actions should be undertaken:

- Prior to construction, the right-of-way, vacant areas, and new access roads shall be staked and surveyed for the subject species by conducting field surveys by qualified botanists during the appropriate time of year.

- Individual plants, populations, and habitat identified adjacent to the staked right-of-way, staging areas, and access roads shall be fenced and flagged to alert construction workers to avoid these sensitive areas.

- Pipeline right-of-way alignment, staging areas, and access roads shall be adjusted to avoid individual plants or habitat of the subject species.

- o Public off-road vehicle use of the right-of-way, staging areas, and access roads, shall be prevented in the vicinity of the known occurrences of these plant taxa and suitable habitat by the use of signs, gates, or fences.

- o Vehicles and equipment will not be permitted outside of the right-of-way, staging areas, and access roads during construction or pipeline operation.

Wildlife:

130. If looping is required on the Northwest system, Northwest shall conduct surveys as required by the USFWS to identify prairie dog colonies in the project area. Where active colonies are found to be impacted by the proposed route, further surveys by a qualified biologist shall be completed to determine the presence or absence of black-footed ferrets. Such surveys shall be done within one year of initial pipeline construction.

131. Black-footed ferret surveys shall be conducted if any rodent control operations are undertaken for prairie dogs in potential ferret habitat. If the most recent survey work for ferrets is less than one year old, then no additional work is required.

3.1.17 Staff Recommended Mitigation Measures for the Transwestern Proposal

Geology

132. The volcanic cinder cones present northwest of Flagstaff, Arizona, shall be investigated to estimate the potential of an event that would affect the Transwestern Expansion and allow for contingency planning.

Soil

133. Transwestern shall implement erosion control measures in the Carlsbad Resource Area (BLM Roswell District) as required by the authorizing officer. One example of such a measure is the use of water bars with the following guidelines:

- o Simulate the imaginary contour lines of the slope, ideally with a grade of 1 to 2 percent.

- o Drain down and away from the disturbed area.

- Public off-road vehicle use of the right-of-way, staging areas, and access roads, shall be prevented in the vicinity of the known occurrences of these plant taxa and suitable habitat by the use of signs, gates, or fences.

- Vehicles and equipment will not be permitted outside of the right-of-way, staging areas, and access roads during construction or pipeline operation.

Wildlife:

130. If loading is required on the Northwest system, Applicant shall conduct surveys as required by the USFWS to identify prairie dog colonies in the project area. Where active colonies are found to be impacted by the proposed route, further surveys by a qualified biologist shall be completed to determine the presence or absence of black-footed ferrets. Such surveys shall be done within one year of initial pipeline construction.

131. Black-footed ferret surveys shall be conducted if any recent control operations are undertaken for prairie dogs in potential ferret habitat. If the most recent survey work for ferrets is less than one year old then no additional work is required.

3.1.17 Staff Recommended Mitigation Measures for the Transwestern Proposal

Geology

132. The volcanic cinder cones present northwest of Flagstaff, Arizona, shall be investigated to estimate the potential of an event that would affect the Transwestern Expansion and allow for contingency planning.

Soil

133. Transwestern shall implement erosion control measures in the Carlsbad Measure Area (Bill Powell District) as required by the authorizing officer. One example of such a measure is the use of water bars with the following guidelines:

- Bisulate the imaginary contour lines of the slope, ideally with a grade of 1 to 2 percent.

- Drain down and away from the disturbed area.

- o Begin and end in vegetation.
- o Use the following spacing intervals:

Slope (%)	Interval (feet)
less than 2.5	200
2.5 to 5	150
6 to 9	100
more than 9	50

Terrestrial Biology

Vegetation:

134. Transwestern shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

135. Throughout the Carlsbad Resource Area reseeding will be required on all portions of the ROW where blading occurs. Seeding will be done with a disk-type drill. The seeder will be followed by a drag, packer, or rollers to ensure adequate compaction. The seed mixture will consist of:

Species	Pounds per acre of pure live seed
Sand dropseed	0.25
Sand lovegrass (Eragrostis trichoides)	0.50
Little bluestem (Andropogon scoparius)	0.25

Wildlife:

136. Prior to construction on public lands in the Carlsbad Resource Area, a qualified biologist shall survey all potential raptor habitat within 0.25 mile of the pipeline and identify active and inactive nests. Construction within 0.25 mile of active aeries shall not be permitted during the nesting season (April 1 to ~~October~~ September 1 for raptors). ~~Construction is permitted near inactive nests.~~ Nests shall not be disturbed at any time. ~~Construction may occur between September 2 and March 28.~~

137. Use of heavy equipment or explosives should be restricted in Sections 11 and 12, Township 19 North, Range 20 West, and Section 7, Township 19 North, Range 19 West in Arizona between December 1 and June 30. This should be done to protect bighorn sheep lambing activities.

- Begin and end in vegetation.
- Use the following spacing intervals:

Slope (%)	Interval (feet)
less than 2.5	200
2.5 to 5	150
6 to 9	100
more than 9	50

Terrestrial Biology

Vegetation:

124. Transwestern shall notify the Arizona Commission of Agriculture and Horticulture at least 30 days prior to construction, so that the agency can survey the proposed ROW in Arizona and salvage protected plants.

125. Throughout the Cerbat Resource Area reseeding will be required on all portions of the ROW where blading occurs. Seeding will be done with a disk-type drill. The seeder will be followed by a drag, packer, or rollers to ensure adequate compaction. The seed mixture will consist of:

Species	Pounds per acre of pure live seed
Sand dropseed	0.25
Sand lovegrass (Eragrostis trichodes)	0.50
Little bluestem (Andropogon scoparius)	0.25

Wildlife:

126. Prior to construction on public lands in the Cerbat Resource Area, a qualified biologist shall survey all potential raptor habitat within 0.25 mile of the pipeline and identify active and inactive nests. Construction within 0.25 mile of active aeries shall not be permitted during the Nesting season (April 1 to September 1 for raptors). Conservation-designated nest-protective measure Nests shall not be disturbed at any time. Construction may occur between September 1 and March 30.

127. Use of heavy equipment or activities should be restricted in Sections 11 and 12, Township 19 North, Range 20 West, and Section 7, Township 19 North, Range 19 West in Arizona between December 1 and June 30. This should be done to protect timber sales logging activities.

138. Construction activities in the vicinity of established or suspected migration corridors for desert bighorn sheep shall be timed so as not to conflict with animals during migration. The appropriate state or federal management agency shall be contacted to establish calendar dates which would define the time of construction that would minimize impacts due to disturbance.

Land Use

139. Transwestern Loop G would be on the border of the Fort Valley Experimental Forest in Coconino NF. The loop shall be located on the north side of the existing pipeline in the vicinity of the experimental forest.

140. Transwestern shall inform the Waste Isolation Pilot Project authorities of its pipeline crossing under the north access road and water pipeline.

141. Loop I shall be placed on the south side of the existing line in order to avoid infringement on the Mount Nutt Wilderness Study Area.

Cultural Resources

American Indian Concerns:

142. The Navajo Nation has well developed policies with regard to archaeological and sacred sites and the disposition of burials. They require a complete inventory of archaeological and sacred sites along the proposed expansion loops. Such an inventory will require both a pedestrian survey of the construction corridor and facility areas as well as interviews with local residents (land-users) and medicine men to fully document the presence of sacred sites. Some of these sites are already on record in local BIA offices. Burials, if encountered, must be identified if possible, and avoided whenever feasible. Reburial is possible when certain conditions are met, however. Archaeological excavation requires a permit from the Navajo Nation. In addition, the various chapters of the Navajo Nation wish to have a voice regarding which side of the original pipeline the proposed expansion loops would be laid. Transwestern shall follow the requirements of the Navajo Nation.

138. Construction activities in the vicinity of established or suspected migration corridors for desert bighorn sheep shall be timed so as not to conflict with animals during migration. The appropriate state or federal management agency shall be contacted to establish calendar dates which would define the time of construction that would minimize impacts due to disturbance.

Land Use

139. Transwestern Loop G would be on the border of the Fort Valley Experimental Forest in Coconino NF. The loop shall be located on the north side of the existing pipeline in the vicinity of the experimental forest.

140. Transwestern shall inform the Waste Isolation Pilot Project authorities of its pipeline crossing under the north access road and water pipeline.

141. Loop I shall be placed on the south side of the existing line in order to avoid intrusement on the Mount Dutt Wilderness Study Area.

Cultural Resources

American Indian Concerns:

142. The Navajo Nation has well developed policies with regard to archaeological and sacred sites and the disposition of burials. They require a complete inventory of archaeological and sacred sites along the proposed expansion loops. Such an inventory will require both a pedestrian survey of the construction corridor and facility areas as well as interviews with local residents (land-users) and medicine men to fully document the presence of sacred sites. Some of these sites are already on record in local BIA offices. Burials, if encountered, must be identified if possible, and avoided whenever feasible. Reburial is possible when certain conditions are met, however. Archaeological excavation requires a permit from the Navajo Nation. In addition, the various chapters of the Navajo Nation wish to have a voice regarding which side of the original pipeline the proposed expansion loops would be laid. Transwestern shall follow the requirements of the Navajo Nation.

3.1.18 Staff Recommended Mitigation Measures for the Kern River Proposal

Geology

143. Avalanche hazards shall be mitigated by routing the pipeline down stable ridgelines to an elevation where the potential for avalanche damage is not significant.

Other mitigations for pipeline protection against avalanche hazards shall include encasing the pipe in a protective housing within the avalanche prone areas or deep burial of the pipe in the high mountain avalanche prone areas.

144. Kern River shall realign its route to use the Wasatch Variation. This would significantly reduce the potential of pipeline rupture and damage to the environment by eliminating segments of the mainline which contain severe slope stability problems.

145. The volcanic cinder cones in the Sevier Desert and Lima Dome areas shall be investigated to determine the potential for an event which could disturb the Kern River Mainline and allow for contingency planning.

Surface Water

146. Trenching through Las Vegas Wash shall be avoided by directionally drilled installation beneath the channel bed. Measures to stabilize the pipeline across the Las Vegas Wash shall be coordinated with the Clark County Wash Development Committee and shall consider the Wetlands Park Master Plan as well as the Master Plan of the Clark County Regional Flood Control District. [This measure will not be necessary if staff's recommendation to use the North Las Vegas Variation is adopted.

147. Construction in the Bear River shall not occur during April, May, or June.

Freshwater Biology

148. Impacts to fish species of special concern shall be sufficiently mitigated through scheduling construction activities so that they do not conflict with ~~the particular species during~~ migration of spawning species. The appropriate state or federal management agency has guidelines defining calendar dates when activity should not occur for the species in question. Scheduling of construction may vary with the environment and climatological circumstances for any given year.

Terrestrial Biology

Wildlife:

149. Construction activities in the vicinity of established or suspected migration corridors for desert bighorn sheep shall be timed so as not to conflict with animals during migration. The appropriate state or federal management agency shall be contacted to established calendar dates which would define the time of construction that would minimize impacts due to disturbance.

150. Conduct surveys as required by the USFWS to identify prairie dog colonies in the project area. Where active colonies are found to be impacted by the proposed route, further surveys by a qualified biologist shall be completed to determine the presence or absence of black-footed ferrets. Such surveys shall be conducted within one year of initial pipeline construction.

151. Black-footed ferret surveys shall be conducted if any rodent control operations are undertaken for prairie dogs in potential ferret habitat. If the most recent survey work for ferrets is less than one year old, then no additional work is required.

Land Use

152. Kern River shall utilize the North Las Vegas Variation.

System Safety and Reliability

153. Aircraft monitoring of the pipeline ROW for operation and maintenance purposes shall be coordinated with nearby military installations, e.g., Edwards AFB, in order to avoid potential conflict.

154. The route through Bakersfield shall be carefully selected to avoid or minimize impact on areas zoned residential or recreational.

3.2 ADDITIONAL MEASURES WHICH THE AGENCIES SOUGHT COMMENT

Twenty-nine additional mitigation measures (not reprinted here) were presented in the DEIR/DEIS for comment on their need, appropriateness, and feasibility. Although some commentors provided a listing of those measures they wanted adopted, there was little or no associated documentation as to their need, appropriateness, and feasibility, as requested. Of the twenty-nine, there was adequate support for Measures H, L, and N in the Draft EIR/EIS. These three have been incorporated into the

respective mitigation measure sections of Volumes I and II and Section 3.1 of Volume 3 (see Recommended Measure Nos. 22, 71, and 109.

LIST OF PREPARERS

LIST OF REFERENCES

LIST OF PREPARERS

Name	Responsibility or Title
California State Lands Commission	
Mary Griggs	Environmental Project Manager
Diana Jacobs	Terrestrial Biology
Randall Moory	Air Quality
Federal Energy Regulatory Commission	
Robert Arvedlund	Environmental Project Director
John Leiss	Mojave/El Dorado Project Manager
Laurence Sauter	Kern River Project Manager
Mark Jensen	Land Use, Socioeconomics, Visual Resources, Soils
Nick Lello	Alternatives
John Korzeniowski	Alternatives
Patti Leppert-Slack	Aquatic and Terrestrial Biology, Water Resources
Lonnie Lister	Geology, Water Resources
Daniel Norden	Air and Noise Quality
Lauren O'Donnell	Alternatives, Cultural and Paleontological Resources
John Roddy	Legal Counsel
Deborah Vrabel	Cultural Resources
Chambers Group, Inc.	
M.D. Chambers	President, Principal-in-Charge
Kenneth J. Lord	Project Manager
DiAnne Valentine	Task Manager, Land Use; Cartographer
Nancy S. Cella	Research Associate: Cultural Resources, Socioeconomics, Recreation, Traffic; Editor
Teri Van Huss	Supervisor, Report Production
Eileen Campisi	Financial Coordinator
Robin King DeLapp	Word Processing
Courtney Gomez	Word Processing
Gigi Bayliss	Cover art, pipeline artwork, Cartographic assistance
The Copy House, Sacramento	Printing and binding

LIST OF PREPARERS

Name	Responsibility or Title
California State Lands Commission	
Mary Griggs	Environmental Project Manager
Diana Jacobs	Terrestrial Biology
Randall Mabry	Air Quality
Federal Energy Regulatory Commission	
Robert Arvedlund	Environmental Project Director
John Leias	Mojave/El Dorado Project Manager
Laurence Sauter	Kern River Project Manager
Mark Jensen	Land Use, Socioeconomics, Visual Resources, Soils
Nick Lello	Alternatives
John Kozanlovski	Alternatives
Patti Lepper-Black	Aquatic and Terrestrial Biology, Water Resources
Lonnie Lister	Geology, Water Resources
Daniel Norden	Air and Noise Quality
Lauren O'Donnell	Alternatives, Cultural and Paleontological Resources
John Roddy	Legal Counsel
Deborah Vrabel	Cultural Resources
Chambers Group, Inc.	
M.D. Chambers	President, Principal-in-Charge
Kenneth J. Lord	Project Manager
DiAnne Valentine	Task Manager, Land Use; Cartographer
Nancy S. Celia	Research Associate: Cultural Resources, Socioeconomics, Recreation, Traffic; Editor
Tavi Van Buss	Supervisor, Report Production
Eileen Campisi	Financial Coordinator
Robin King Delapp	Word Processing
Courtney Gomes	Word Processing
Gigi Bayliss	Cover art, pipeline artwork, Cartographic assistance
The Copy Mouse, Sacramento	Printing and binding

LIST OF PREPARERS (continued)

Name	Responsibility or Title
Chambers Group, Inc. (continued)	
Philip de Barros	Task Manager, Cultural Resources and Paleontology
Chris Drover	Technical Report, Great Basin
Gordon Bronitsky	Technical Report, NM and AZ
Jon Frizell	Research Associates (NM, AZ)
Beth Sennett-Walker	Research Associate (WY, CO, NV)
Farron Webb	American Indian Concerns, Navajo and Laguna Tribes
Glenn Russell	Research Associate
Nicholas Trierweiler	Research Associate
James Miller	Research Associate
GEOLOGY, SOIL, SURFACE WATER, GROUNDWATER, FRESHWATER BIOLOGY, TERRESTRIAL BIOLOGY	
Bio/West, Inc.	
Tom Twedt	Deputy Project Manager
Oliver Grah	Task Manager - Vegetation, Soils, Water Resources, and Geology
Roy Hugie	Task Manager - Wildlife, Grazing, Biological Assessment,
William Glenn	Soils
Randall Gainer	Geology
Loren Anderson	Geology
Richard White	Groundwater
Karen Rice	Geology, Groundwater
Larry Crist	Freshwater Biology
Elizabeth Neece	Vegetation
Frank Smith	Vegetation
William Masslich	Vegetation, Wildlife
S. Blaise Chanson	Wildlife, Field Surveys
Anne Flannery	Wildlife
Miriam Rand	Technical Editor
Roni Pekins	Technical Editor
Gerald Hughes	Cartography
Earth Facts	
Randy Gaynor	Surface Water and Groundwater
John Keith	Surface Water and Groundwater

LIST OF PREPARERS (continued)

Name	Responsibility or Title
Chambers Group, Inc. (continued)	
Phillip de Barros	Task Manager, Cultural Resources and Paleontology
Sheila Brewer	Technical Report, Great Basin
Gordon Bronitsky	Technical Report, NM and AZ
Jon Pelzel	Research Associates (NM, AZ)
Beth Bennett-Walker	Research Associate (WY, CO, NV)
Farron Webb	American Indian Concerns, Navajo and Laguna Tribes
Glenn Russell	Research Associate
Nicholas Trierweiler	Research Associate
James Miller	Research Associate
GEOLOGY, SOIL, SURFACE WATER, GROUNDWATER, PRECIPITATION HYDROLOGY, TERRESTRIAL BIOLOGY	
Bio/West, Inc.	
Tom Tweet	Deputy Project Manager
Oliver Gran	Task Manager - Vegetation, Soils, Water Resources, and Geology
Roy Bugle	Task Manager - Wildlife, Grazing, Biological Assessment,
William Glenn	Soils
Randall Gainer	Geology
Loren Anderson	Geology
Richard White	Groundwater
Karen Rice	Geology, Groundwater
Larry Crise	Freshwater Biology
Elizabeth Reece	Vegetation
Frank Smith	Vegetation
William Kasnick	Vegetation, Wildlife
S. Blaine Chanson	Wildlife, Field Surveys
Anne Flannery	Wildlife
Myrlan Rand	Technical Editor
Roni Pekins	Technical Editor
Gerald Bugbee	Cartography
Earth Tech	
Randy Cayce	Surface Water and Groundwater
John Keith	Surface water and Groundwater

LIST OF PREPARERS (continued)

Name	Responsibility or Title
AIR QUALITY	
Applied Modeling, Inc. (Air Quality Modeling)	
Khanh T. Tran	Task Manager
Prasanta Bhunia	Reactive Modeling
Richard Manz	Inert Modeling
Fabrice Cuq	Reactive Modeling
Sunil Jambusana	Inert Modeling
Jacobs Engineering (Air Quality Emissions)	
Hamid Rastegar	Task Manager
Jim Goepel	Inventory
SYSTEM SAFETY AND RELIABILITY	
Reese-Chambers Systems Consultants	
Tim Chambers	System Pipeline Analysis
SOCIOECONOMICS	
Leviathan Associates	
David Rockland	Task Manager
Pam Rockland	Research Associate
PALEONTOLOGY	
Museum of Northern Arizona	
Michael Morales	Co-Task Manager
E. Bruce Lander	Technical Report Co-Author
Grace V. Irby	Technical Report Co-Author
Spencer G. Lucas	Research Associate, NM, TX
Wade Miller	Research Associate, UT
Jeffrey G. Eaton	Research Associate, WY, CO and eastern Utah
Kenneth R. Thiessen	Research Associate, AZ

LIST OF PREPARERS (continued)

Name	Responsibility or Title
AIR QUALITY	
Applied Modelling, Inc.	(Air Quality Modeling)
Khanh T. Tran	Task Manager
Prasanta Bhunia	Reactive Modeling
Richard Haas	Inert Modeling
Fabrice Cuq	Reactive Modeling
Sunil Tamhavana	Inert Modeling
Jacobs Engineering	(Air Quality Emissions)
Hamid Rastegar	Task Manager
Jim Cooper	Inventory
SYSTEM SAFETY AND RELIABILITY	
Teague-Chambers Systems Consultants	
Tim Chambers	System Pipeline Analysis
SOCIOECONOMICS	
Leviathan Associates	
David Rockland	Task Manager
Pam Rockland	Research Associate
PALEONTOLOGY	
Museum of Northern Arizona	
Michael Morales	Co-Task Manager
E. Bruce Lander	Technical Report Co-Author
Grace M. Irby	Technical Report Co-Author
Spencer G. Lucas	Research Associate, NM, TX
Wade Miller	Research Associate, UT
Jeffrey G. Eaton	Research Associate, NV, CO and eastern Utah
Kenneth R. Thiessen	Research Associate, AZ

LIST OF PREPARERS (continued)

Name	Responsibility or Title
VISUAL RESOURCES	
Takata Associates	
Robert Takata	Task Manager
James Fraser	Project Manager
Jeannie Lau	Project Planner